


DESK STAND CONNECTIONS COMMON BATTERY

1. GENERAL **SEE ADDENDUM**

1.01 This section covers the sidetone and anti-sidetone common battery desk stand connections for the following classes of service:


- Individual Lines (Manual and Dial)
- Two-Party Selective Flat Rate (Manual and Dial)
- Two-Party Selective Message Rate (Manual Only)
- Four-Party Semi-Selective (Manual and Dial)
- Four-Party Selective (Manual and Dial)
- Eight-Party Semi-Selective (Manual and Dial)
- Non-Selective Party Lines (Manual Only)
- Divided Code Ringing (Manual and Dial)
- Regular P.B.X. Stations (Manual and Dial)

1.02 The section is reissued to include varistor connections for 52AB and 152AB desk stands. ↗

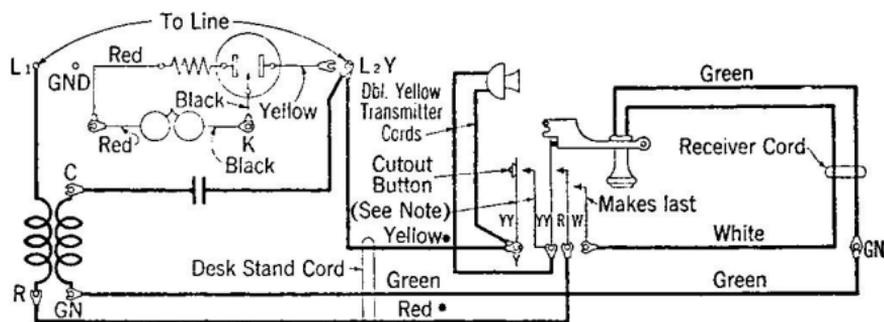

* For side tone reduction connect yellow to R and red to L2Y
Note: These two springs are not provided in 40 and 20 AL desk stand

**Fig. 1—40CM, 20CM, 40AL or 20AL Sidetone Desk Stands
(Manual Only).** ↘

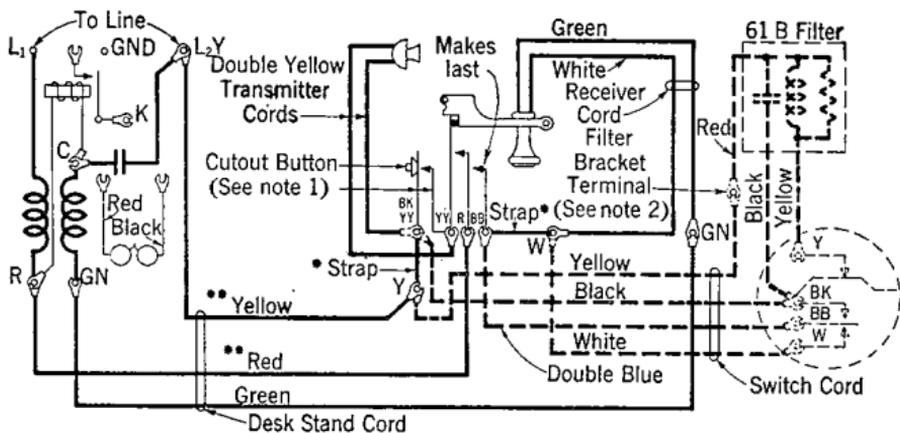


- Remove strap for dial service.

Note 1: These two springs are not provided in the 50AL desk stand.

Note 2: If filter is not provided connect yellow lead from switchhook to Y of dial instead of to filter bracket terminal.

- For sidetone reduction connect yellow to R and red to L₂Y

**Fig. 2—50CM or 50AL Sidetone Desk Stands
(Manual and Dial).**

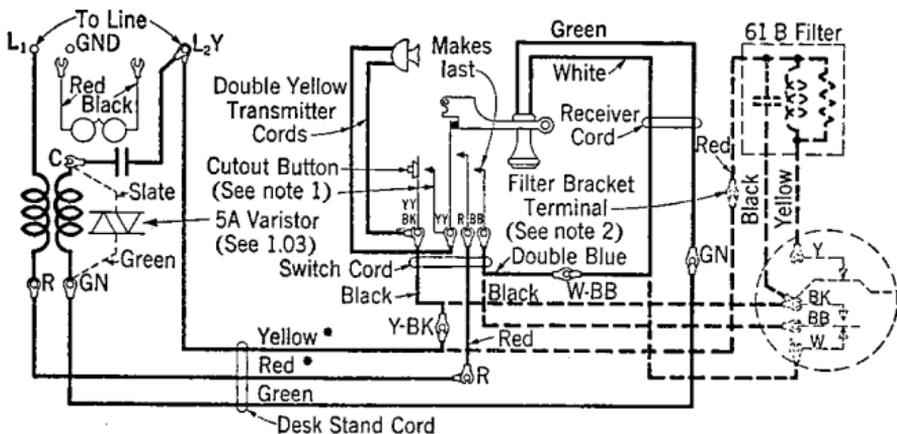


Note 1: These two springs are not provided and black lead in switch cord terminates directly on transmitter in the 51AL or 52AB desk stands.

Note 2: If filter is not provided connect yellow lead from L₂Y to Y of dial instead of to filter bracket terminal.

- For sidetone reduction connect yellow to R and red to L₂Y.

**Fig. 3—51CM, 51AL or 52AB Sidetone Desk Stands
(Manual or Dial).**

1.03 The 5A varistor shown in Figures 3 and 4 is required only for 52AB and 152AB desk stands, and when used at sidetone stations on grounded ringing lines the subscriber set must have a separate ringing condenser except subscriber sets having 313A vacuum tubes.

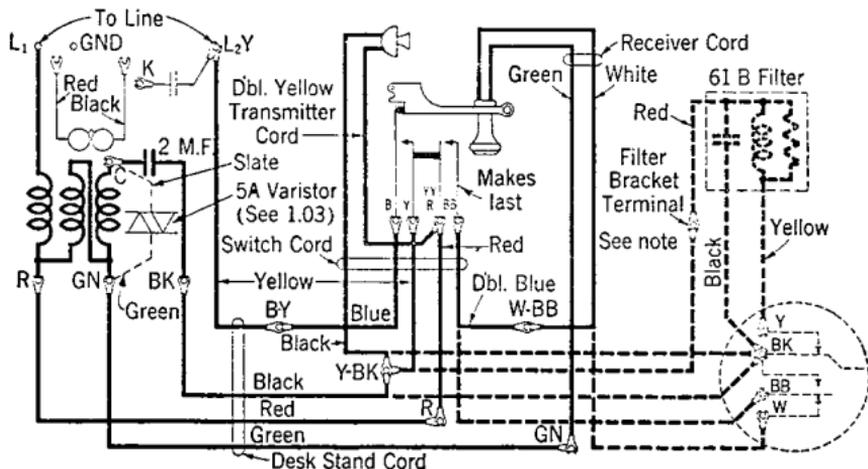

Note: If filter is not provided connect yellow lead from switchhook to Y of dial instead of to filter bracket terminal.

Fig. 4—151AL or 152AB Anti-Sidetone Desk Stands (Manual and Dial).

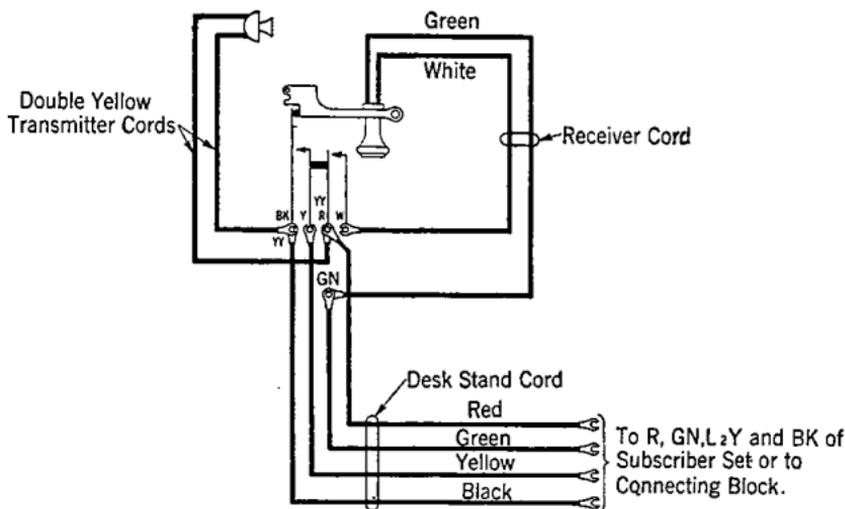


Fig. 5—140AL or 120AL Anti-Sidetone Desk Stands (Manual Only).

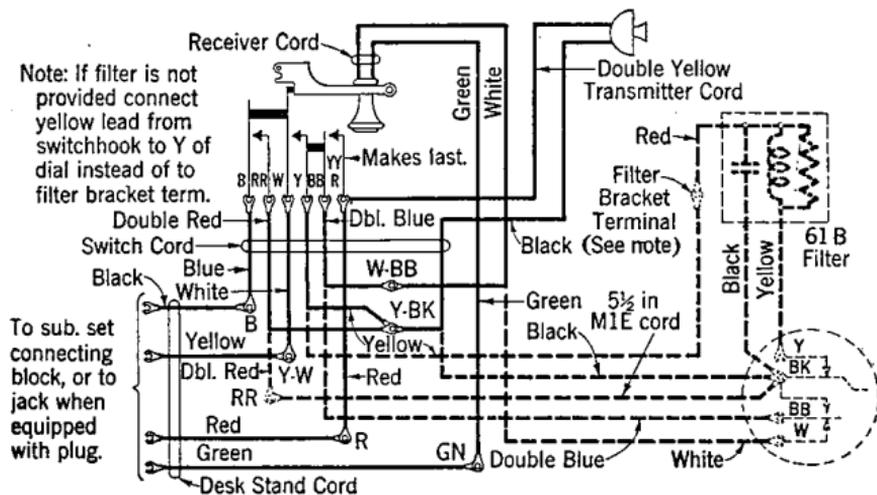


Fig. 6—151R Desk Stand Rewired.

Note: Use Fig. 6 when more than one desk stand is ← connected to a single anti-sidetone subscriber set.