

Lucent Technologies
Bell Labs Innovations



DACS II
Release 9.1.3, MML
Feature Guide

365-353-297
Issue 1.0
March 2001

Copyright © 2001 Lucent Technologies

All Rights Reserved

Printed in U.S.A

This material is protected by the copyright and trade secret laws of the United States and other countries. It may not be reproduced, distributed or altered in any fashion by any entity (either internal or external to Lucent Technologies), except in accordance with applicable agreements, contracts, or licensing, without the express written consent of the Customer Training and Information Products organization and the business management owner of the material.

Notice

Every effort was made to ensure that the information in this document was complete and accurate at the time of printing. However, information is subject to change.

Mandatory Information

Security Statement

In rare instances, unauthorized individuals make connections to the telecommunications network through the use of remote access features. In such event, applicable tariffs require that the customer pay all network charges for traffic. Lucent Technologies cannot be responsible for such charges, and will not make any allowance or give any credit for charges that result from unauthorized access.

Trademarks

5ESS and *SLC*[®] is a registered trademark of Lucent Technologies.

COMMON LANGUAGE is a registered trademark and CLEI, CLLI, CLCI, and CLFI are trademarks of Bell Communications Research, Inc.

American Express is a registered trademark of American Express Company.

MasterCard is a registered trademark of mastercard International Inc.

Visa is a registered trademark of VISA International Service Association.

Documentation Ordering Information

The ordering number for this document is 365-353-297. To order this document, call the Lucent Technologies Customer Information Center in Indianapolis, Indiana, on 1-888-582-3688. For more ordering information, refer to "How to Order Documentation" in the section "About this Document."

Customer Assistance and Technical Support

Lucent Technologies provides technical assistance 24 hours a day, seven days a week. For technical assistance within the United States, call 1-800-225-RTAC. For technical assistance in Europe, call the Netherlands Technical Support Organization (TSO) at 31-3587-1555. For technical assistance in the Far East, call the Singapore TSO at 65-241-0880. If your country of origin provides local technical support, please contact them directly.

Documentation Support Telephone Number

Lucent Technologies provides a telephone number for you to report errors or to ask questions about the information in this document (i.e., for permission to reproduce or distribute). The support telephone numbers are:

Outside the United States - 1-317-322-6847

Inside the United States - 1-800-645-6759

Acknowledgements

This document was developed by the Lucent Technologies Customer Training and Information Products Organization.

Lucent Technologies values your comments!

DACS II
Feature Guide Release 9.1.3

365-353-297 Issue 1.0 Date: March 2001

Lucent Technologies welcomes your comments on this information product. Your opinion is of great value and helps us to improve.

1. Was the information product:

	Yes	No	Not applicable
In the language of your choice?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
In the desired media (paper, CD-ROM, etc.)?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Available when you needed it?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Please provide any additional comments:

2. Please rate the effectiveness of this information product:

	Excellent	More than satisfactory	Satisfactory	Less than satisfactory	Unsatisfactory	Not applicable
Ease of use	<input type="checkbox"/>					
Level of detail	<input type="checkbox"/>					
Readability and clarity	<input type="checkbox"/>					
Organization	<input type="checkbox"/>					
Completeness	<input type="checkbox"/>					
Technical accuracy	<input type="checkbox"/>					
Quality of translation	<input type="checkbox"/>					
Appearance	<input type="checkbox"/>					

If your response to any of the above questions is "Less than satisfactory" or "Unsatisfactory," please explain your rating.

3. If you could change one thing about this information product, what would it be?

4. Please write any other comments about this information product:

Please complete the following if we may contact you for clarification or to address your concerns:

Name: _____ Date: _____

Company/organization: _____ Telephone number: _____

Address: _____

Email address: _____ Job function: _____

If you choose to complete this form online, go to <http://www.lucent-info.com/comments>
Otherwise fax to 407 767 2760 (U.S.) or +1 407 767 2760 (outside the U.S.) or email comments to ctiphotline@lucent.com



Contents

■ Background	1-3
Introduction	1-3
Objectives	1-3
Related tasks	1-3
Related information	1-3
■ Alarm Inhibit Feature	1-4
Overview	1-4
NPC Types	1-4
Port In-service States	1-5
Inhibit State	1-5
Start-up State	1-6
Working State	1-6

(Continued on next page)

Contents

■ GT 1.1: Change System Start-up Time Interval	1-7
When to use	1-7
Before you begin	1-7
Task	1-7
■ GT 1.2: Change NPC Start-up Time Interval	1-8
When to use	1-8
Before you begin	1-8
Task	1-8
■ GT 1.3: Change NPC In-service Substate	1-9
When to use	1-9
Related Tasks	1-9
Task	1-9
■ GT 1.4: Querying Alarm Inhibit Summary	1-10
When to use	1-10
Related Tasks	1-10
Task	1-10
■ Glossary	

Background

Introduction

This section describes the DACS II Alarm Inhibit Feature incorporated into Release 9.1.3.

Objectives

This section provides information to perform the following:

1. Change System Start-up Time Interval
 2. Change NPC Start-up Time Interval
 3. Change NPC In-service Substate
 4. Retrieve a report on System Start-up Time Interval on an NPC, range of NPCs or all NPCs and elapsed time.
-

Related tasks

For related tasks, refer to the following tasks in this guide:

- | | |
|--|--------|
| ■ Change System Start-up Time Interval | GT 1.1 |
| ■ Change NPC Start-up Time Interval | GT 1.2 |
| ■ Change NPC In-service Substate | GT 1.3 |
| ■ Querying Alarm Inhibit Summary | GT 1.4 |
-

Related information

For related information, refer to the:

- *DACS II Operation and Maintenance Manual Release 9.0*
 - *DACS II Command and Message Manual Release 9.1.3*
-

Alarm Inhibit Feature

Overview

The Alarm Inhibit Feature provides the option to inhibit the reporting of alarms and Threshold Crossing Alerts on provisioned DACs II ports where the customer signal is not yet present.

This feature will reduce maintenance costs and improve the operation and maintenance of the system. In doing so, the technicians and OS systems will not be flooded with unnecessary work items during service activation and turn-up activities.

NPC Types

The following NPC types that can be put in the inhibit state are as follows:

- DA
 - DE
 - PA
 - PB
 - PC
 - TA
 - TE
 - TH
-

Alarm Inhibit Feature (Continued)

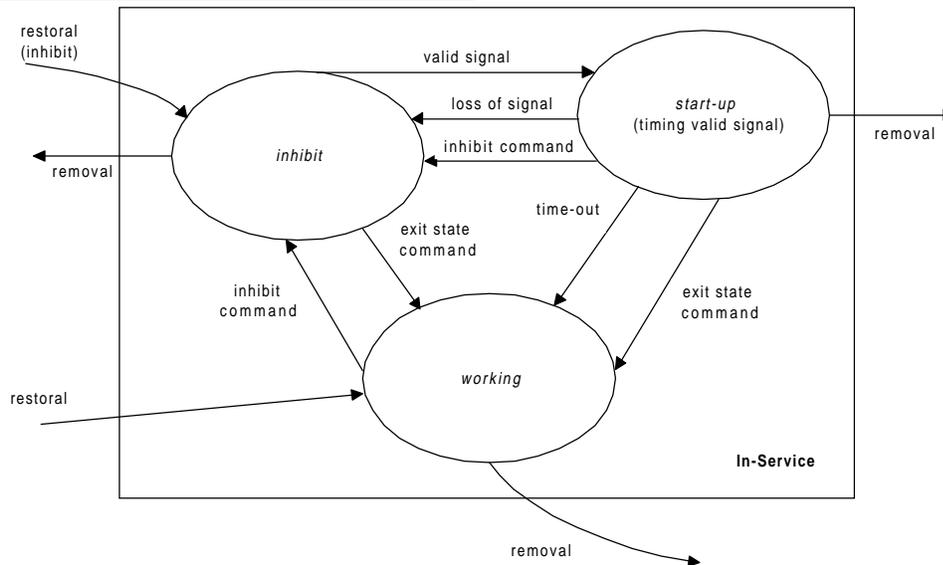


Figure -1. Port State Transitions

Port In-service States

When a DACS II port is restored, it is put in-service. There are three states that an NPC can be in while in-service.

- Inhibit
- Start-up
- Working

Inhibit State

When set in the Inhibit State, ports are placed in service with reporting of alarms and TCAs turned off. The DACS II monitors the incoming signal for the presence of a valid customer signal and if necessary, will send consequent actions and clear LOS, LOF, and AIS alarms internally, but will not send alarm messages to the OS.

The DACS II will calculate and store PM data for all applicable PM parameters, but will not send TCAs to the OS. This state will allow the technician to perform cross-office and end-to-end acceptance testing on the provisioned circuit before the customer is notified of the circuit availability. The inhibit feature is automatically off unless TCA and alarm inhibition option is selected during the use of the restoral command.

Alarm Inhibit Feature (Continued)

Start-up State

The start-up state is provisioned by the customer to start a system timer which records the duration of the valid customer signal. The customer sends the signal but may still be conducting various start-up activities. A retrieve message allows the user to retrieve the amount of time that the port has been in start-up state.

The DACS II monitors the input signal for a continuous period with the autonomous reporting of alarms and TCAs still turned off. If the customer signal is interrupted or lost before reaching the provisioned or default start-up interval, the timer automatically resets to zero and the process starts over again in the inhibit state. The port start-up interval can range from 1 minute to 48 hours and is provisioned on a per port basis on a range of ports. The system start-up interval which default value is 8 hours can range from 1 to 48 hours and is defined on a system basis.

**NOTE:**

If the inhibit option is selected but no port start-up time interval is selected, the system start-up time interval is chosen.

Working State

The port is in working state when the presence of a contiguous customer signal for a time interval equal to the provisionable start-up interval transitions to the start of an autonomous reporting of alarms and TCAs for the receiving port.

When an NPC is restored, it will be in the working state if inhibit keyword is not stated while using the NPC Restore command [I.34351].

GT 1.1: Change System Start-up Time Interval

When to use Use this task to change the system start-up time interval.

Task To change the system start-up time interval, enter the following command [I.38371]:

```
ED-OPT-SYSINHTIM: [xy] : : [ww] : hr ;
```

Where:

SYSINHTIM	System inhibit timer keyword
------------------	------------------------------

Stop! End of Task.

GT 1.2: Change NPC Start-up Time Interval

When to use Use this task to change the port/range of ports start-up time interval.



NOTE:

The option INHTIM is incompatible with DSPU NPCs because AISP does not apply for DSPU NPCs. Consequently, the presence of an NPC number belonging to a DSPU will not allow the INHTIM option.

Before you begin The port/range of ports must be equipped prior to the use of this task.

Task To Change NPC start-up time interval, enter the following command [1.38381]:

```
ED-PRMTR-EQPT:[<xy>]:NPC-[s]abc[&&-[t]def]:[ww]:INHTIM-hrmm;
```

Where:

[s]abc	The 3- or 4-digit nonhierarchical NPC number (beginning of the range).
INHTIM	Inhibit timer keyword
hrmm	Time (hour, minute)

Stop! End of Task.

GT 1.3: Change NPC In-service Substate

When to use Use this task to force an NPC in a specific in service substate: Inhibit state, startup state or working state.



NOTE:

The options FORCEINH and FORCEWKG are incompatible with DSPU NPCs because AISP does not apply for DSPU NPCs. Consequently, the presence of NPC number belonging to DSPU will not allow the FORCEINH and FORCEWKG options.

Related Tasks

For related tasks, refer to:

- GT 1.4: Querying Alarm Inhibit Summary

Task

To change an NPC in service substate by exiting from Inhibit/Start-up state or exiting from Working state, enter the following command [I.38391]:

```
ED-PRMTR-EQPT:[ <xy>]:NPC-[s]abc[ &&-[t]def]:[ww]:
{FORCEINH|FORCEWKG}
```

Where:

[s]abc	The 3- or 4-digit nonhierarchical NPC number (beginning of the range).
FORCEINH	Force to Inhibit state keyword

Stop! End of Task.

GT 1.4: Querying Alarm Inhibit Summary

When to use Use this task to query an alarm inhibit summary on an NPC, range of NPCs, or all NPCs. The query will provide system start-up and for each port will provide the port number, service state, and port start-up time interval along with elapsed time.

Related Tasks For related tasks, refer to:

- GT 1.2: Change NPC Start-up Time Interval.

Task To query an alarm inhibit summary, enter the following command [53341]:

```
RTRV-INH:[<xy>]:{NPC-[s]abc[&&-[t]def]|ALL}: [ww];
```

Where:

INH	Inhibit timer
[s]abc	The 3- or 4-digit nonhierarchical NPC number, start of NPC range
[t]def	The 3- or 4-digit nonhierarchical NPC number, end of NPC range

Stop! End of Task.

Glossary

A

AIS

Alarm Indication Signal (also known as all 1s signal).

Alarm Indication Signal (AIS)

A signal transmitted downstream to indicate that network transmission line failures were detected upstream.

All Ones Signal

Another name for DS1 Alarm Indication Signal (AIS). It is defined to contain all ones in the terminal-to-terminal mode.

B

BER

Bit Error Rate.

Byte

Usually refers to a group of eight consecutive binary digits, but sometimes used for bit groups of other sizes.

C

CEF

Capacity Expansion Frame.

CEPT

Conference of European Postal Telecommunications (standard E1 signal: 2.048 Mb/s).

CGA

Carrier Group Alarm.

Cross-Connect

A piece of hardware used to interconnect line-terminating equipment, multiplexers, and other equipment.

Cross-Connection

An interconnection between two specified NPC channels.

D**DACS**

Digital Access and Cross-Connect System.

Default

A value the system automatically uses for a parameter if you do not specify a value.

Demultiplexer

A device used with a multiplexed signal for recovering signals contained within it and restoring the distinct individual channels of these signals.

DS0

Digital Signal Level 0 (64-kb/s).

DS1

Digital Signal Level 1 (1.544-Mb/s).

DS1 Data Rate

The DS1 Data Rate is calculated as follows: $DS1 = (24 \text{ Channels} \times 8 \text{ bit/sample} + 1 \text{ frame bit}) \times 8000 \text{ samples/sec}$
 $DS1 = 193 \times 8000 = 1.544 \text{ Mb/s}$.

DS1 Port

A DS1 port in either a DS1 interface module or a DS3 interface module.

DS3

Digital Signal Level 3.

DS3U

DS3 Unit.

E**E1 Data Rate**

The E1 Data Rate is calculated as follows:

$E1 = (32 \text{ Channels} \times 8 \text{ bit/sample}) \times 8000 \text{ samples/sec}$

$E1 = 256 \times 8000 = 2.048 \text{ Mb/s}$

With this data rate, 30 channels carry traffic and two channels are reserved; one channel contains framing information and the other channel contains signaling information.

H**HDS3**

Hybrid DS3.

HDS3U

Hybrid DS3 Unit.

HMXR

Hybrid Multiplexer.

I**IDLD**

Idled.

Idle

An output port is idle if it is not cross-connected to an input port.

Idle Channel

A channel on an NPC that has not been cross-connected.

K**kb/s or kbit/s**

Kilobit Per Second.

L**LOF**

Loss of Frame.

Loopback

A circuit arrangement that causes a received signal to be returned to its source.

LOS

Loss of Signal.

M**Mb**

Megabit

Mb/s or Mbit/s

Megabit Per Second.

MIU

Multipoint Interface Unit.

MMFG

Multiplexer-MIU Functional Group or HMXR-MIU Functional Group.

MML

HuMan-Machine Language (a language used by the DACS II).

MXR

Mutliplexer.

N**NPC**

Network Processing Circuit.

P**PBA**

Primary Block Alarm.

PDS

Program Documentation Standards (a language used by the DACS II).

R**R16**

Remote Alarm Indication in TS16.

RAI

Remote Alarm Indication.

RAIS

Remote Alarm Indication Signal.

