

DIGITAL TRANSMISSION SYSTEM  
828AFXT DIGITAL MULTIPLEXER  
SPECIFICATIONS

1. GENERAL

- 1.01 This section is a cover sheet for the Telco Systems Fiber Optics Corporation Digital Transmission System 828AFXT Digital Multiplexer Specifications. This section is reproduced with permission of Telco Systems Fiber Optics Corporation and is the equivalent of Telco practice 833-102-004, Issue 1.
- 1.02 Whenever this section is reissued the reason(s) for reissue will be listed in this paragraph.
- 1.03 This section contains specifications for the 828AFXT Digital Multiplexer and the card and module specifications.
- 1.04 If corrections are required in the attached document, use Form-3973 as described in Section 000-010-015.
- 1.05 If equipment design and/or manufacturing problems should occur, refer to Section SW 010-522-906 for procedures on filing an Engineering complaint.

2. ORDERING PROCEDURE

- 2.01 For information concerning equipment and parts availability contact Telco Systems, Order Administration Department, In Norwood, Massachusetts, at:

1-800-44-SALES

1-617-551-0300

- 2.02 To order additional copies of this practice, use TELC 365-407-856SW as the section number.

3. REPAIR/RETURN

- 3.01 For defective modules and assemblies contact the Repair and Return Department at the following number:

8:00 a.m. - 5:00 p.m. (617) 551-0300 - Ext. 2778

PROPRIETARY

Not for use or disclosure outside Southwestern Bell  
Telephone Company except under written agreement.

Attachment: Telco Systems Fiber Optics Corporation  
Digital Transmission System  
828AFXT Digital Multiplexer  
Specifications

PROPRIETARY

Not for use or disclosure outside Southwestern Bell  
Telephone Company except under written agreement.

DIGITAL TRANSMISSION SYSTEM  
828AFXT DIGITAL MULTIPLEXER  
SPECIFICATIONS

CONTENTS	PAGE
1. SCOPE.....	4-1
2. MULTIPLEXER SPECIFICATIONS.....	4-1
3. CARD AND MODULE SPECIFICATIONS.....	4-1

1. SCOPE

1.01 This section contains specifications for the 828AFXT Digital Multiplexer (see Figure 4-1), and the card and module specifications.

1.02 Whenever this section is reissued, the reason for reissue will be listed in this paragraph.

2. MULTIPLEXER SPECIFICATIONS

2.01 TABLE A contains the 828AFXT specifications, including interface and power requirements, physical characteristics, and environmental operating conditions.

3. CARD AND MODULE SPECIFICATIONS

3.01 This subsection contains the specifications for the cards

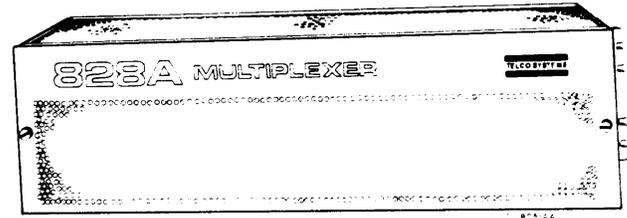


Figure 4-1. 828AFXT Multiplexer

and modules of the 828AFXT Multiplexer. Included are specifications on the following:

- o LS INTER T1 (T1 Low-Speed Interface) card (TABLE B)
- o HS COM (High-Speed Common) card (TABLE C)
- o XCVR (Transceiver) card (TABLE D)
- o Power Supply Module input/output voltages (TABLE E)
- o RAC II (Remote Alarm) Card (TABLE F)

TABLE A. 828AFX Digital Multiplexer System Specifications

<p>DS-1 INTERFACE</p> <p>Line Rate: Line Code: Line Impedance: Pulse Amplitude: Jitter: Cable: Maximum Span:</p>	<p>1.544 Mb/s <math>\pm</math> 130 ppm Half-width Bipolar (AMI)* 100 ohms, nominal balanced 3.0 V <math>\pm</math> 0.6 V 0.3 time-slots rms ABAM, or equivalent 655 feet to cross-connect facility</p>
<p>HIGH-SPEED INTERFACE</p> <p>Line Rate: Line Code: Wavelength (Minimum Center): Wavelength (Maximum Center):</p>	<p>44.736 Mb/s <math>\pm</math> 20 ppm (optical) Randomized NRZ data</p> <p>1280 nm</p> <p>1330 nm</p>
<p>MULTIPLEXER MAIN FRAME</p> <p>Channel Capacity: Multiplexed Data Rate: Transmit Multiplex Timing: Line Impedance: Reframe Time - Automatic:</p> <p>Operating Mode: Signal Interface Line Rate: Line Code:</p>	<p>Up to 28 lines of 1.544 Mb/s data 44.736 Mb/s <math>\pm</math> 20 ppm Internally or externally supplied 75 ohms, <math>\pm</math> 5% unbalanced T1C, 17 ms T2, 7 ms T3, 2 ms Full Duplex</p> <p>44.736 Mb/s <math>\pm</math> 20 ppm (optical) Randomized NRZ data</p>
<p>PRIMARY POWER</p> <p>Voltage: Power Consumption:</p>	<p>-42 Vdc to -56 Vdc 50 Watts</p>
<p>PHYSICAL</p> <p>Height: Width: Depth: Weight:</p> <p>DS-1 Connectors:</p>	<p>6.0 inches 23.0 inches 11.5 inches 22.0 lb. (fully loaded)</p> <p>Wire-wrap</p>

\* AMI (Alternate Mark Inversion)

TABLE A. 828AFXT Digital Multiplexer System Specifications (Cont.)

ENVIRONMENTAL CONDITIONS (OPERATING)			
Condition	Min. to Max. Temperature(°F)	Min. to Max. Temperature (°C)	Relative Humidity (30°C) (Non-Condensing)
Operational:	-40 to +151	-40 to +66	Up to 80%
Storage:	-40 to +151	-40 to +66	Up to 95%

Note: Ambient temperature refers to conditions 5 feet above the bottom of, and 15 inches in front of the 828AFXT.

TABLE B. LS INTER T1 Card Specifications

Line Rate:	1.544 Mb/s $\pm$ 130 ppm
Line Code:	Half-width bipolar (AMI)*
Impedance:	100 ohms nominal, balanced
Amplitude:	3.0 V $\pm$ 0.6 V
Cable Type:	ABAM, or equivalent
Cable Span:	0 to 655 feet to DSX-1 cross-connect facility

TABLE C. HS COM Card Specifications

Line Rate:	44.736 Mb/s $\pm$ 20 ppm
Line Code:	ECL (Emitter-Coupled Logic) level
Format:	Bell System DS-3 Mastergroup structure

\* AMI (Alternate Mark Inversion)

TABLE D. XCVR Card Specifications

Output:	SM	-9.0 dBm $\pm$ 1.5 dB
	MM	0 dBm $\pm$ 1.0 dB
	SM	-24.0 dBm $\pm$ 1.5 dB
	SM	-3.0 dBm $\pm$ 1.0 dB
Receiver*		
Sensitivity:		$\leq$ -37.0 dBm
Receive		
Saturation:		$\geq$ -23.0 dBm

TABLE E. Power Supply Module Specifications

Input Voltage:	-42 to -56 Vdc (PSX016-4)
Output Voltages: (Full Load)	-5.6 Vdc $\pm$ 0.025 Vdc +5.4 Vdc $\pm$ 0.025 Vdc +15.3 Vdc $\pm$ 0.050 Vdc

\* This includes the loss at the XCVR card receive optical connector.

Table F. Remote Alarm Card (RAC II) Specifications

Alarm Input Capacity:	Eight Opto Coupled Alarm Points
Alarm Active Range	
Lack of Voltage Input:	0 Vdc $\pm$ 500 mV
Input Voltage Sense:	5 to 53.75 Vdc
Input Impedance:	2.7 kohms (Design per PUB 49001)
Relay Contact Closure Outputs:	(8)
Relay Contact Closure Rating:	500 mA
Contact Closure Fusing:	1 A

Note: Contact closures may be configured to be normal energized or de-energized.