

To Recipients of Bell System Voice Communications Technical References:

The attached figure replaces Figure 1 in the Bell System Voice Communications Technical Reference for Voice Connecting Arrangement RTT, dated January 1970, PUB 42203.


The physical design of Voice Connecting Arrangement RTT has been changed to enable the customer to connect his equipment to screw terminals rather than having to provide a Cannon Plug (SK-M7-21C-1/2).

The four interface leads for this connecting arrangement will be terminated on one set of screw terminals on an Interface Connecting Block (which is shown in the attached figure). The customer must provide and install the conductors and make the necessary connections of his equipment to the voice connecting arrangement on the other set of screw terminals. The Telephone Company will provide metal straps to interconnect the leads.

The connection information for this arrangement is as follows:

<u>Lead Designation</u>	<u>Telephone Company Termination</u>	<u>Customer Termination</u>
ST1	3	4
ST2	2	1
OH1	8	9
OH2	7	6


This change will be included in the revised Technical Reference which should be available in January, 1975.

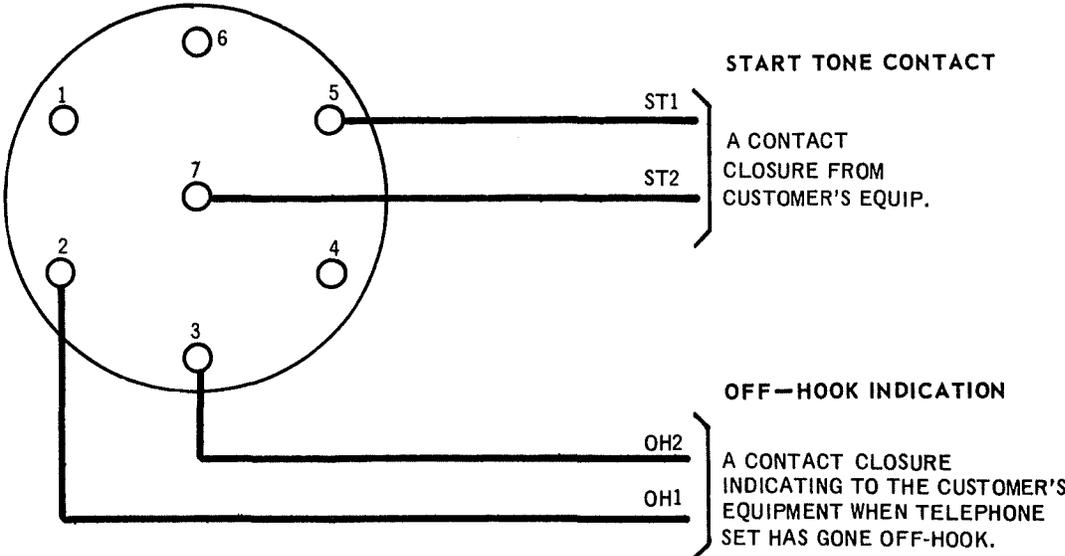

TYPICAL CONNECTIONS FOR SK-M7-21C CANNON PLUG

Fig. 1

PRELIMINARY

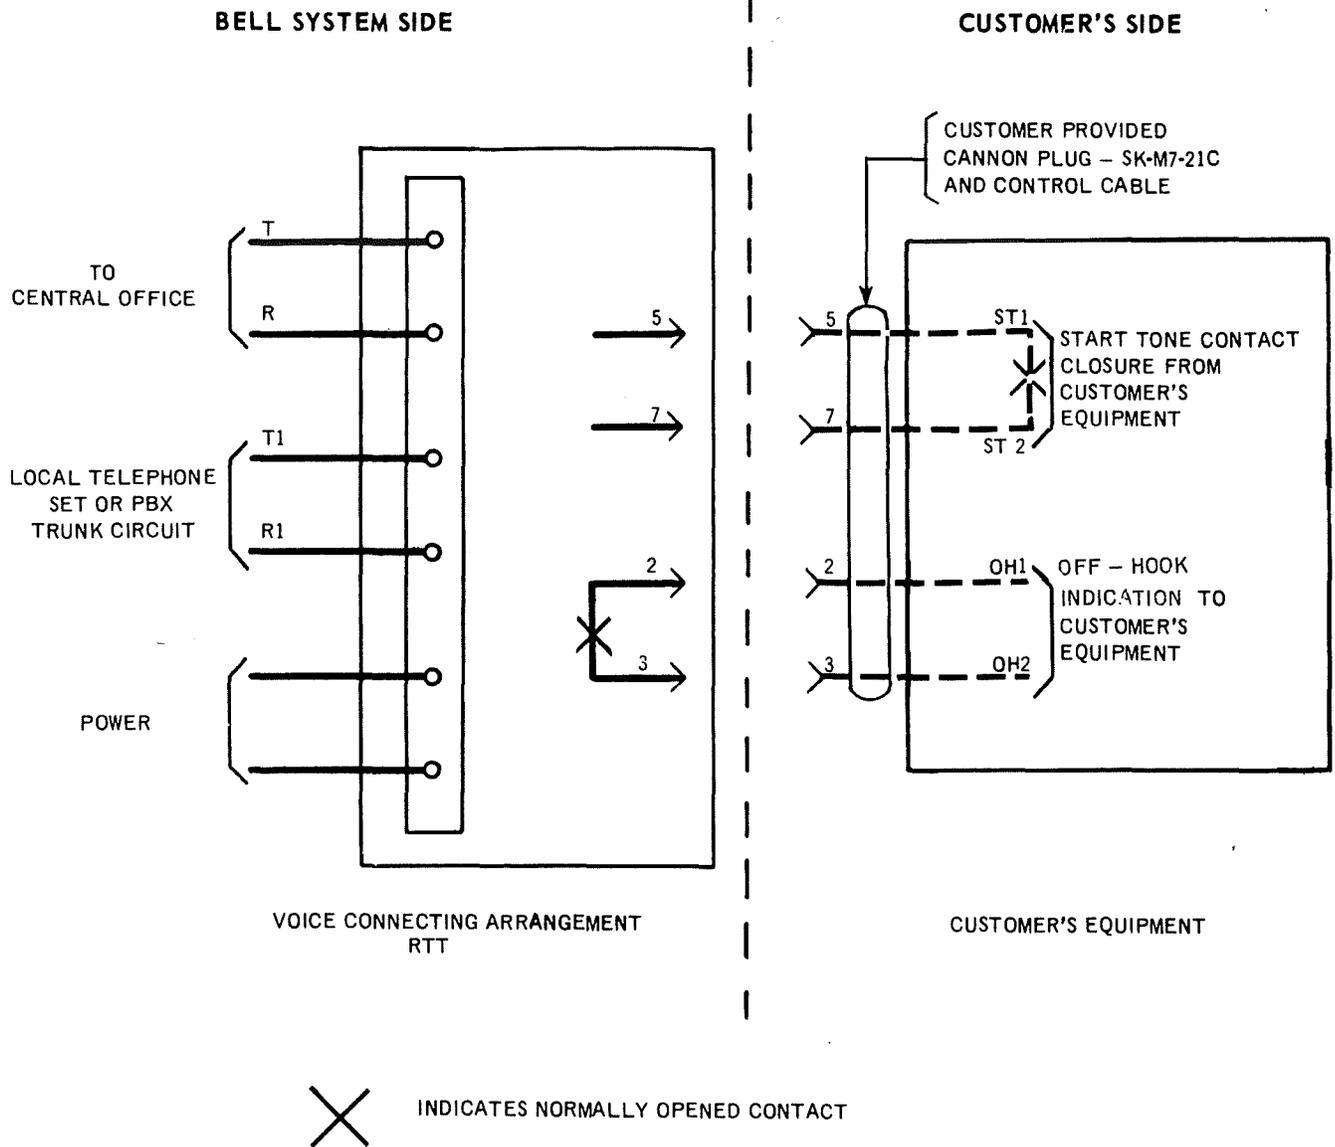

TYPICAL CONNECTIONS FOR VOICE CONNECTING ARRANGEMENT RTT

Fig. 2