


ENGR. J.F. FROCK *J.F.F.*
 DRAWN
 3-11-83 ISSUE 1

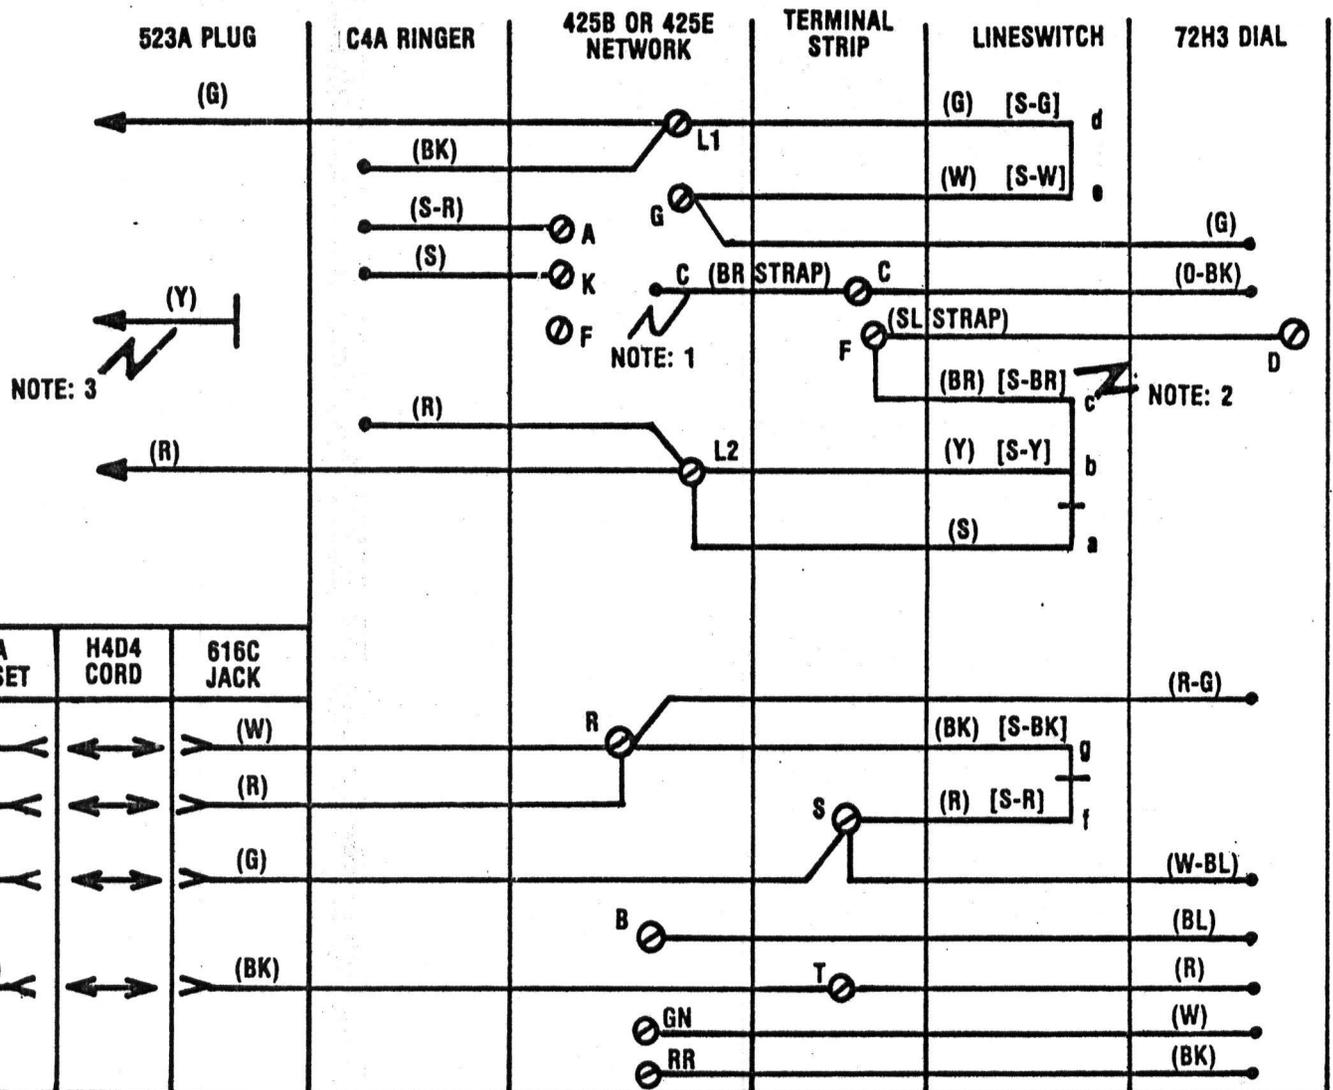

NOTE: 3

NOTE: 1

NOTE: 2

G15A HANDSET	H4D4 CORD	616C JACK
(W)	↔	(W)
(R)	↔	(R)
(G)	↔	(G)
(BK)	↔	(BK)

BSRS 361.357
 USED ON DRAWING
 DWG SIZE 1S
 SHEET L-779409
 WIRING DIAGRAM
 AMERICAN BELL

NOTE: (1) ON SETS WITH THE 425 TYPE NETWORK WITH A SCREW CONNECTION ON TERMINAL C, THE (O-BK) DIAL LEAD WILL BE CONNECTED DIRECTLY TO NETWORK TERMINAL C. THE (BR) STRAP LEAD WILL BE OMITTED.
 (2) ON SETS WITH CURRENT COLOR CODED LINESWITCH LEADS, THE (BR) LINESWITCH LEAD WILL BE CONNECTED TO DIAL TERMINAL D, RATHER THAN TERMINAL STRIP F. THE (SL STRAP) WILL BE CONNECTED.
 (3) INSULATE AND STORE YELLOW (Y) PLUG LEAD.