

DOUBLE PLUG-ENDED FLEXIBLE  
WEATHERPROOF CORD (WR5)

1. GENERAL

1.01 This Section is issued to provide descriptive information for the Double Plug-Ended Flexible Weatherproof Cord used to connect telephone stations installed on boats, trains, auto trailers or mobile homes to outdoor jacks of PBX or central office lines.

1.02 The cord is listed in the Miscellaneous Equipment Section of the General Exchange Tariff with USOC code of WR5 for the standard cord of 50 feet or less and with WR4 for every additional 10 feet, as required.

2. DESCRIPTION

2.01 The Double Plug-Ended Flexible Weatherproof cord consists of a TYREX SJ3 No. 18 cord or equivalent equipped with two KS-8419 plugs. The cord is intended to be used with either the flush mounted KS 8420 jack or the surface mounted KS-8421 jack. (See BSP 461-630-100 for further information on jacks and plugs).

2.02 The cord and plugs must be ordered and assembled as prescribed in BSP 461-630-400 to provide the required length. The Cordage KS-15143, 18 gauge, 3 conductor can be ordered as a satisfactory cordage for use in this assembly.



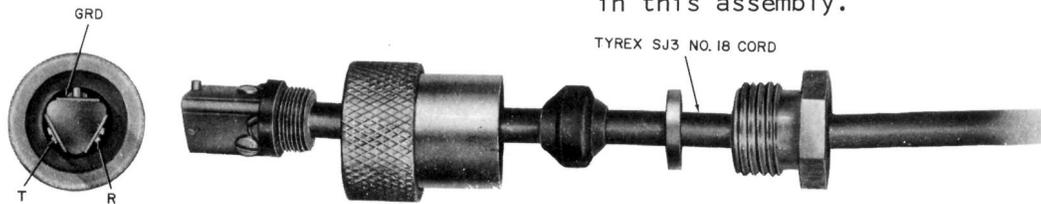


Fig. 1-KS-8419 Plug



- FLUSH MOUNTED JACK
- USES KS8419 PLUG

Fig. 2-KS-8420 Jack, Installed

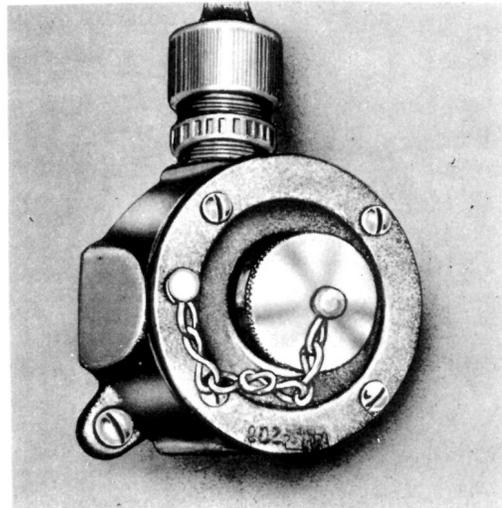

- SURFACE MOUNTED JACK
- USES KS8419 PLUG

Fig. 3- KS-8421 Jack