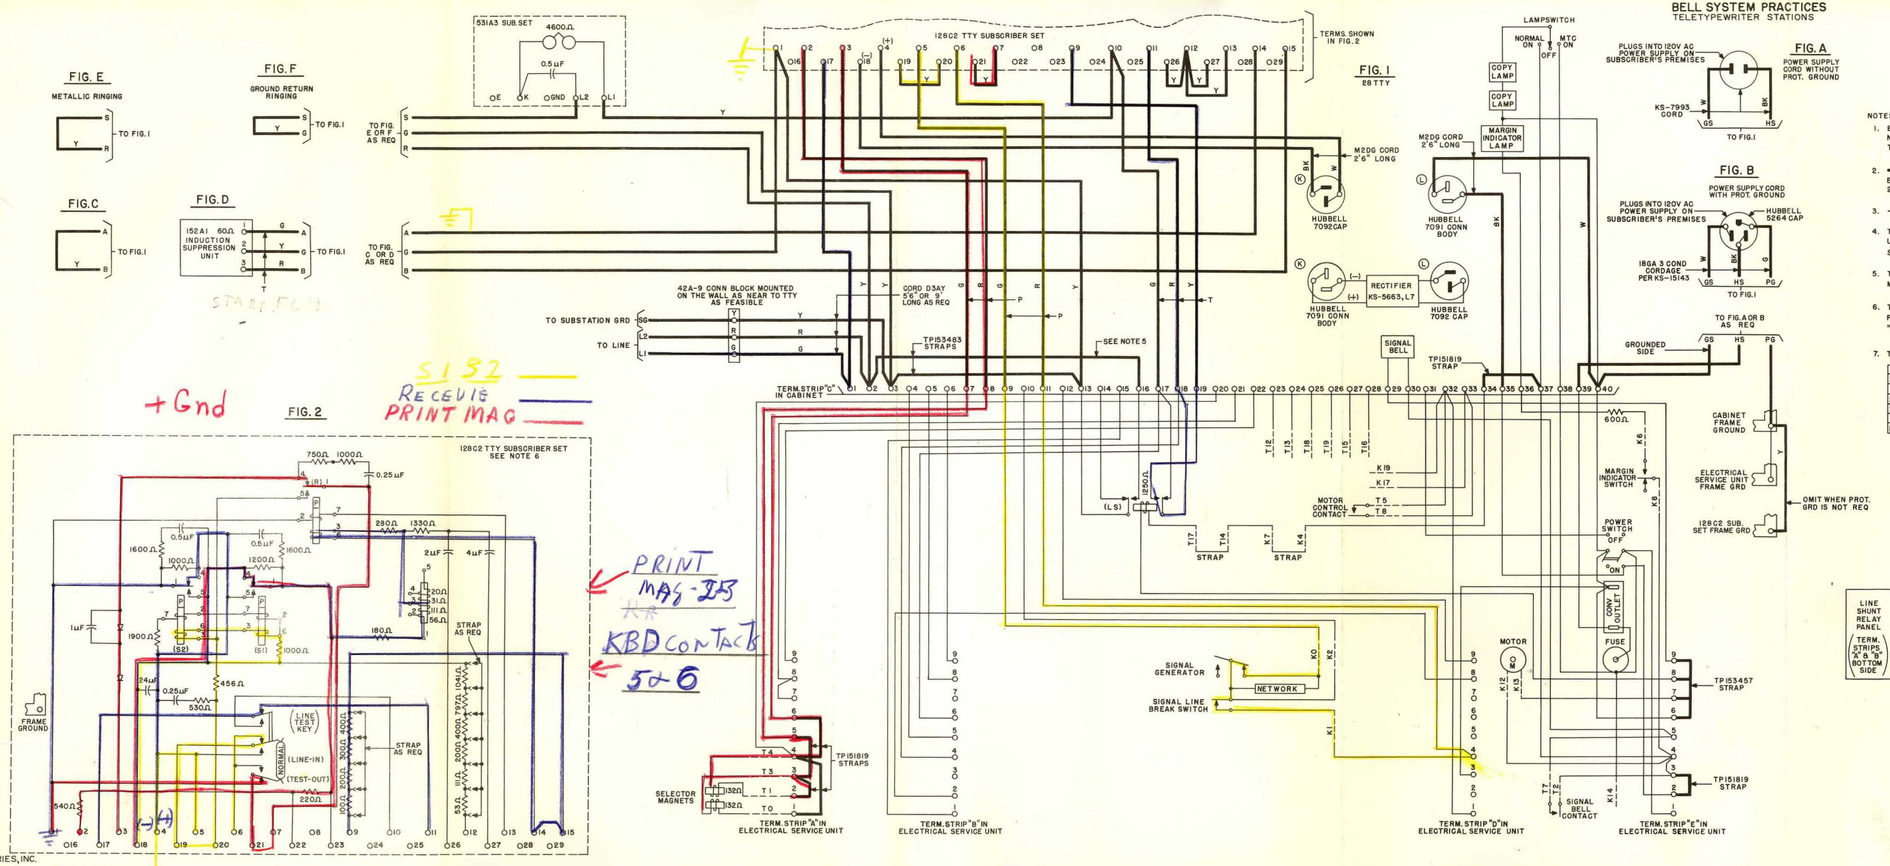

NOTES:

1. BROKEN LINES T2 INDICATE LEADS CARRIED THROUGH CORRESPONDINGLY NUMBERED CONTACTS OF PLUG AND SOCKET CONNECTORS. T INDICATES TYPING UNIT CONNECTOR; K, KEYBOARD.
2. ——— INDICATES CONNECTIONS TO BE ADDED OR CHECKED FOR THEIR EXISTENCE. UNLESS OTHERWISE SPECIFIED ALL SUCH LEADS SHALL BE 22 GAUGE, BROWN, TYPE GS STATION WIRE PER AT&T SPEC. 7089.
3. ——— INDICATES UNIT WIRING TO BE CONNECTED AS SHOWN.
4. THE 128C2 TTY SUBSCRIBER SET, THE 152A1 60Ω INDUCTION SUPPRESSION UNIT (WHEN REQUIRED), THE KS-5663, L7 RECTIFIER, AND THE 531A3 SUB. SET SHALL BE MOUNTED IN THE 28B TTY CABINET.
5. THE TP153483 STRAP CONNECTING TERM. C2 AND TERM. C16 IS REQUIRED FOR MULTI-STATION OPERATION ONLY.
6. THE 128C2 TTY SUBSCRIBER SET SHALL BE ADJUSTED AND STRAPPED FOR LINE CONDITIONS IN ACCORDANCE WITH B.S.P. INSTRUCTIONS IN THE "P" SERIES.
7. THE FOLLOWING EQUIPMENT IS REQUIRED:

28B TTY CABINET
28B ELECTRICAL SERVICE ASSEMBLY
28A TYPING UNIT
28C TTY BASE
28A MOTOR UNIT
128C2 TTY SUBSCRIBER SET
KS-5663, L7 RECTIFIER

FIG. 3

28B ELECTRICAL SERVICE UNIT EQUIPMENT ARRANGEMENT

(TOP VIEW)

LINE SHUNT RELAY PANEL (TERM. STRIPS "A" & "B" BOTTOM SIDE)	BLANK	BLANK	BLANK	BLANK	POWER PANEL (TERM. STRIPS "D" & "E" BOTTOM SIDE)

28 TYPE TELETYPEWRITER
IN 28B TTY CABINET
ATTENDED TWX SERVICE
128C2 TTY SUBSCRIBER SET
120 VOLT AC POWER SUPPLY

STATION IDENTIFICATION

BELL TELEPHONE LABORATORIES, INC.
PRINTED IN U.S.A.

COPYRIGHT, 1954, BY AMERICAN TELEPHONE AND TELEGRAPH CO.