

VOICE CONNECTING ARRANGEMENT TSPZ1 AND TSPXY

1. GENERAL

1.001 This addendum supplements Section 463-382-105, Issue 1.

1.002 This addendum is issued to correct Table C and Fig. 6 with respect to option X to agree with SD-1E295-01, Issue 2.

2. CHANGES TO SECTION

ISSUE 1 CHANGES

2.001 On page 9, replace Table C.

2.002 On page 14, replace Fig. 6.

**TABLE C
OPTION TABLE**

USOC CODE	FEATURE OR OPTION	OPTION	STRAP TERMINALS		
			CKT 1	CKT 2	CKT 3
TSPZ1 or TSPXY	SXS Type CO	V	TS B 18 to 28	TS B 16 to 26	TS B 14 to 24
	Panel, Crossbar or No. 1 ESS Type CO	W*	TS B 28 to 38	TS B 26 to 36	TS B 24 to 34
TSPXY	TOUCH-TONE® Dialing to CO from CPE with IU in Split Mode	X	NONE†		
	Rotary Dialing to CO from CPE with IU in Split Mode	Y	NONE†		
TSPZ1	Rotary or TOUCH-TONE Dialing to CO from PBX Station with IU in Cut-Through Mode	Z*	TS A 27 to 37 TS B 17 to 27 37 to 47	TS A 25 to 35 TS B 15 to 25 35 to 45	TS A 23 to 33 TS B 13 to 23 33 to 43

* Z and W options are factory-wired.

† Customer provides this wiring option at the interface block.

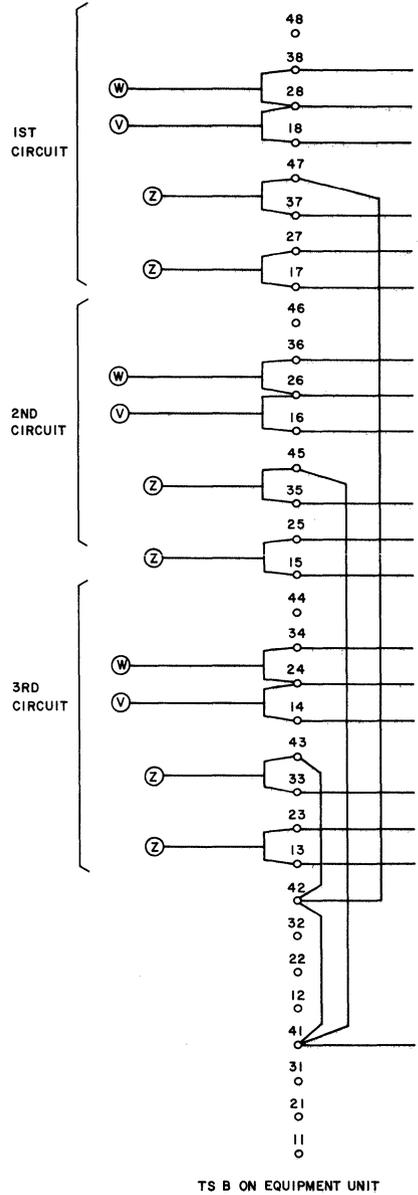
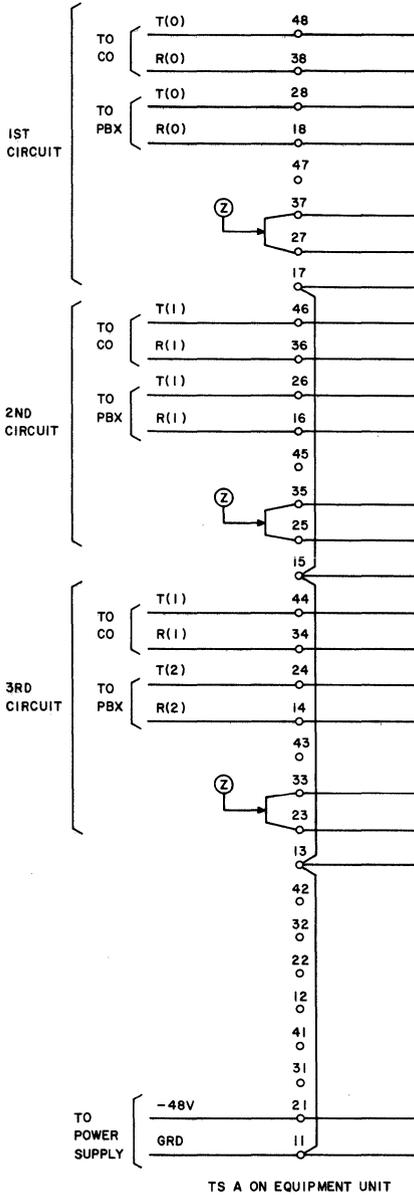


Fig. 6—Voice Connecting Arrangement TSPXY and TSPZ1—Connections