

REGISTRATION INTERFACE

BRIDGED THREE LINE TIP AND RING ARRANGEMENTS

RJ25C

1. GENERAL

1.01 This section contains information on the standard wiring arrangements to be provided under the Federal Communications Commission (FCC) Registration Program for registered telephone, ancillary, data, and protective circuitry of the type associated with telephone and ancillary customer-provided equipment (CPE).

Note: Customer-provided data equipment connected to the network via the jack in this section must have a fixed signal power level under -9 dBm. See Section 590-101-103 for connection of other data devices.

1.02 Whenever this section is reissued, the reason(s) for reissue will be shown in this paragraph.

1.03 This section covers 3-line bridged tip and ring arrangements. For information on other bridged tip and ring arrangements, refer to the following:

- Single line—Section 463-400-120
- Two line—Section 463-400-140
- Multiple (more than three)—Section 463-400-141.

1.04 A 74D connecting block (Fig. 1) or equivalent can be used to provide the 6-position modular jack required for this arrangement.

2. IDENTIFICATION

2.01 **USOC RJ25C:** Provides a bridged connection of the tips and rings of up to

three lines to the CPE (Fig. 2). Normally used with nonkey telephone sets or ancillary devices.

3. MAINTENANCE

3.01 Maintenance of the wiring arrangements covered in this section is limited to:

- Verification of the telephone company wiring and equipment
- Assurance that the required leads are supplied in the interface used for CPE connection.



No attempt should be made to test, modify, or repair customer-owned and maintained equipment.

3.02 When in the judgment of repair personnel the trouble is located in or caused by the CPE, the Repair Service Bureau should be notified so that proper Maintenance of Service Charge Billing can be initiated as required and as outlined in the following:

- Section 660-101-312—Maintenance of Service Charge on Services With Customer-Provided Equipment (CPE)
- Section 660-101-318—Tariff and Registration Violation Notice Procedures.

NOTICE

Not for use or disclosure outside the
Bell System except under written agreement

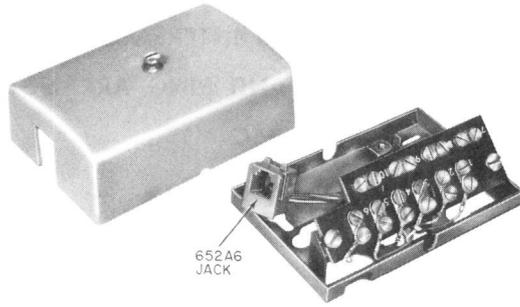


Fig. 1—74D Connecting Block

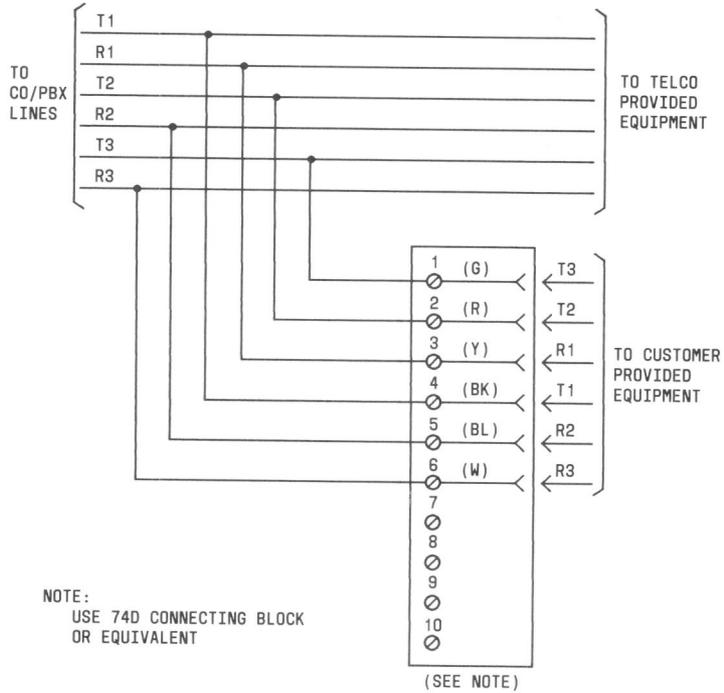


Fig. 2—Connections for USOC RJ25C