

REPLACING PAGE ADDENDUM
Filing Instructions:

1. REMOVE FROM THE SECTION THE PAGES NUMBERED THE SAME AS THOSE ATTACHED TO THIS PINK SHEET.
2. INSERT THE ATTACHED PAGES INTO THE SECTION IN THEIR PLACE.
3. PLACE THIS PINK SHEET AHEAD OF PAGE 1 OF THE SECTION.

**SWITCHING SYSTEM NO. 301A
LINE-UP AND OVERALL TESTS**

1. GENERAL

1.001 This addendum supplements Section 480-708-501, Issue 1. The attached pages must be inserted in the section in accordance with the filing instructions above.

1.002 This addendum is issued to change the voice transmission level units from dB to

Vu in Fig. 3, and to change the wording for the ZN option in 6.01.

2. REPLACEMENT PARTS

The following changes apply:

- (a) Part 3, Fig. 3—revised
- (b) Part 6, 6.01—revised .

Attached:

**Page 5/6 dated February 1971, revised
Page 35 dated February 1971, revised**

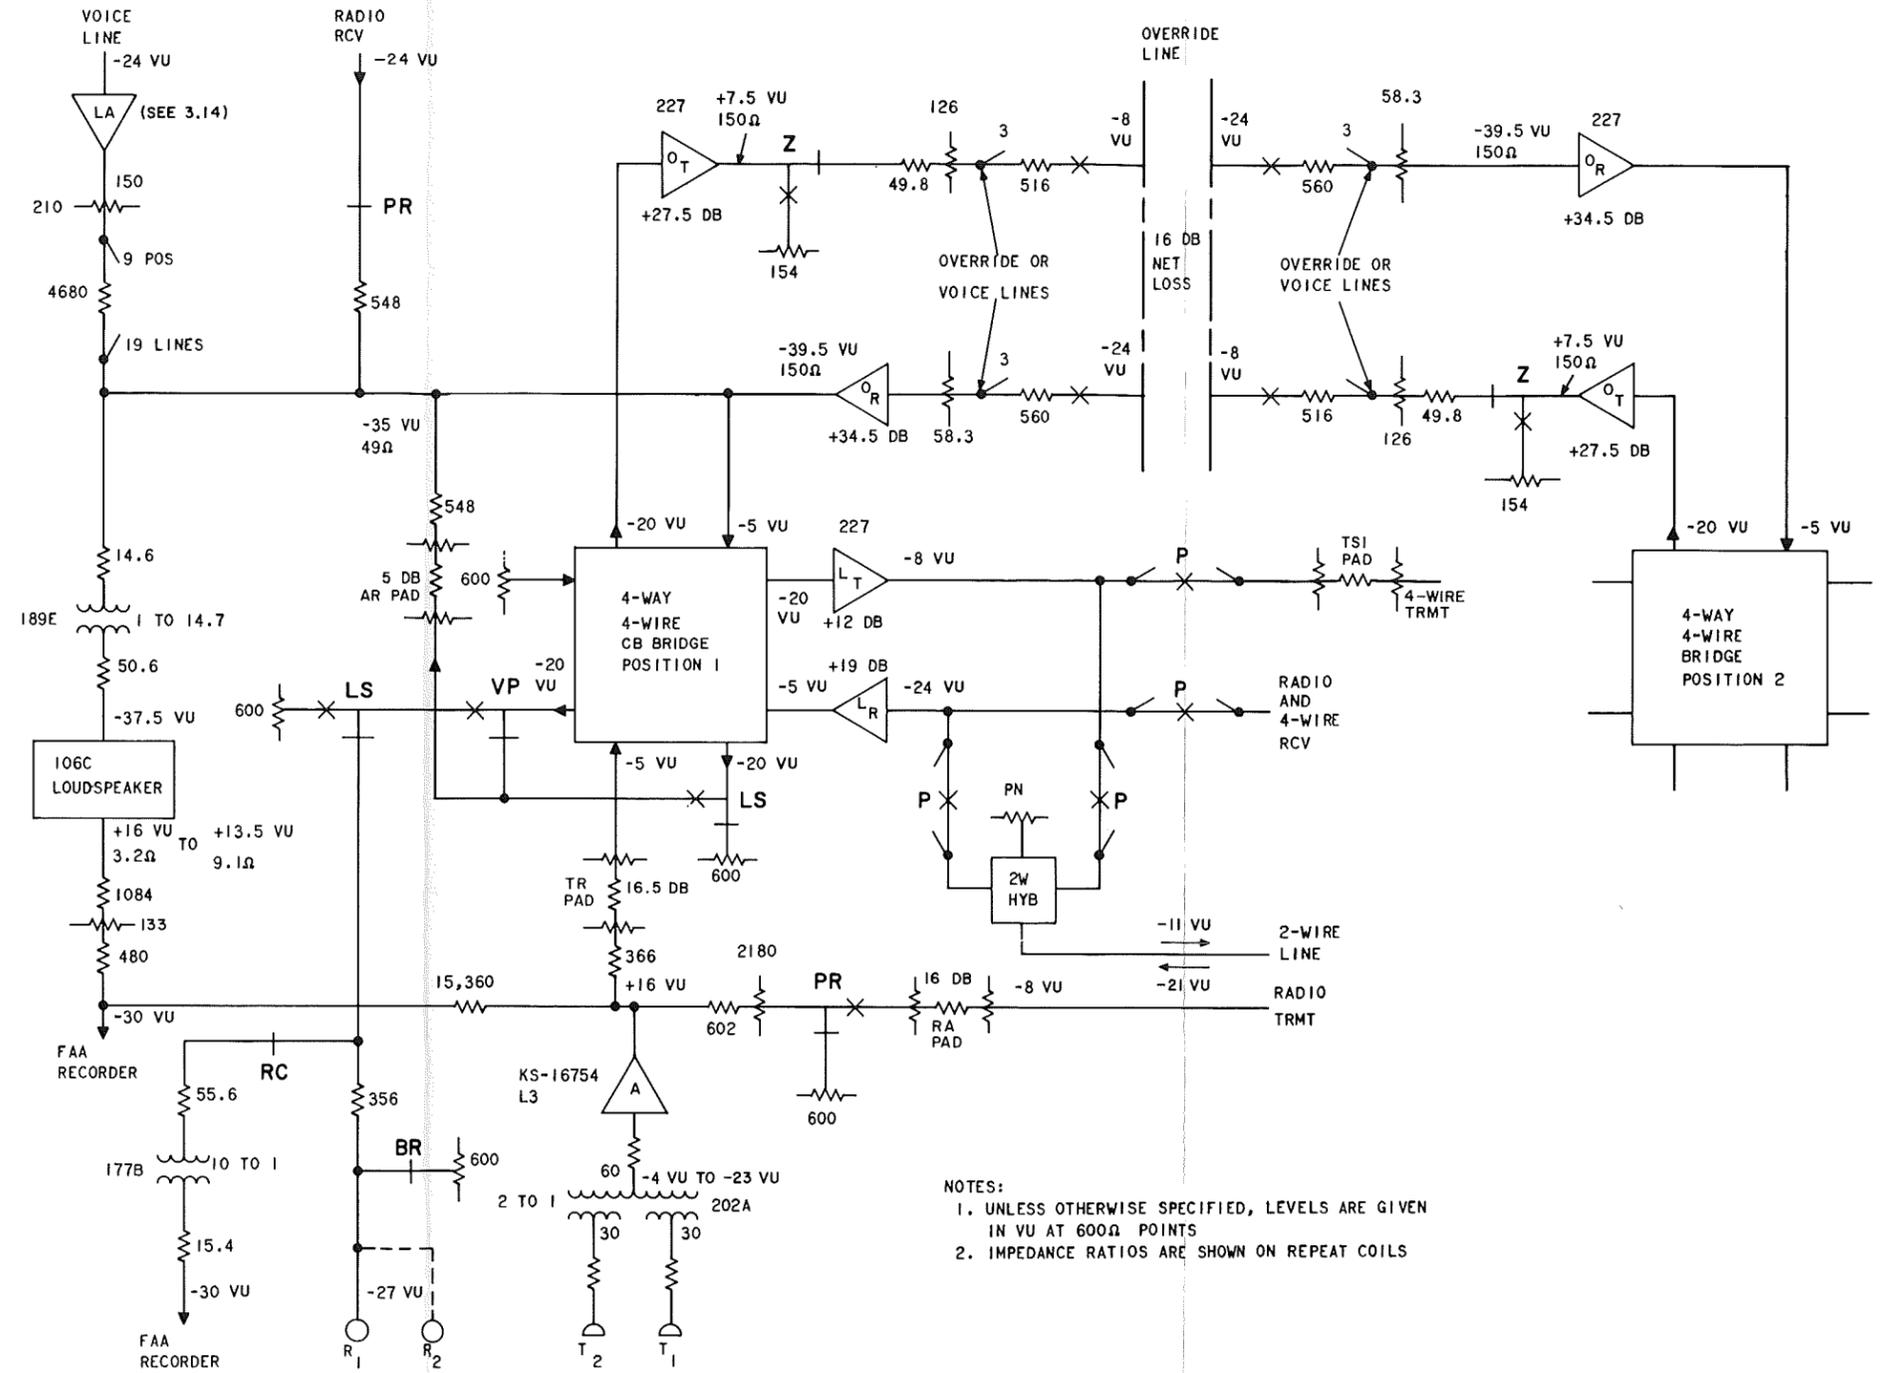


Fig. 3—Overall Transmission Sketch of 301A SS

STEP	ACTION	VERIFICATION
8	Momentarily operate MON button.	AT coordinator position— Monitoring mode released. MON lamp extinguished. (On associated J53048AK unit— (MONW and MONZ relays released. (On J53048K unit— (FS relay released.

6. APPENDIX

6.01 The following describes circuit features, or options, mentioned in this section.

FEATURE OR OPTION	DESCRIPTION
M	Station line circuit arranged for incoming voice signaling
W	SS-1, or SS-1A line circuit arranged for incoming voice signaling
Z	Voice signaling line circuit
ZF	Push-to-talk not required
ZN	Provides ring-out ability on a 2-wire line (also, provides for nonselective ring-in line)