

## PACKAGING AND HANDLING


### DISCONNECTED 1-TYPE TELEPHONE ANSWERING SETS

#### 1.00 GENERAL

This section describes certain procedures to be followed when returning 1-type telephone answering sets to Western Electric Company.

#### 2.00 REMOVAL AND PREPARATION FOR TRANSIT

- Use head-lock springs to secure both magnetic recording heads (Fig. 1).
- Secure carriage slide rod bracket to center drum support. Use cord or lacing twine and place the carriage in the extreme left-hand position (Fig. 2).
- Place corrugated paper fillers as shown in Fig. 2.
- Replace and fasten cover of answering set securely with setscrews in rear corners of base.
- Place answering set in the approved cardboard container (Fig. 3).



*Absolutely nothing else should be put in the carton with the answering set. Scrap or other material of any sort should be transported separately.*

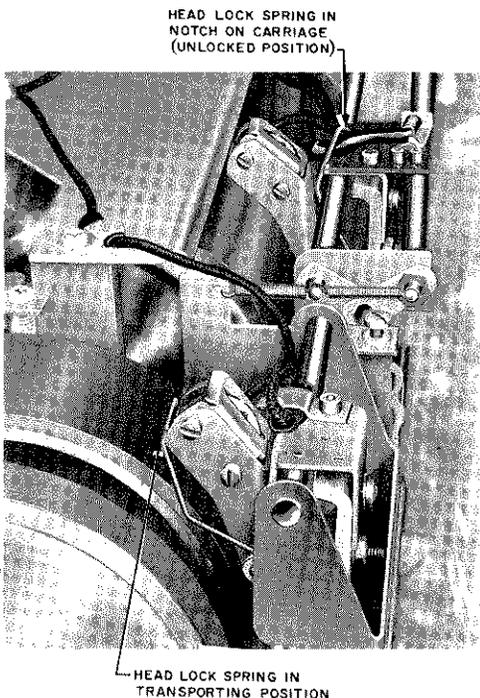


Fig. 1 — Magnetic Recording Heads

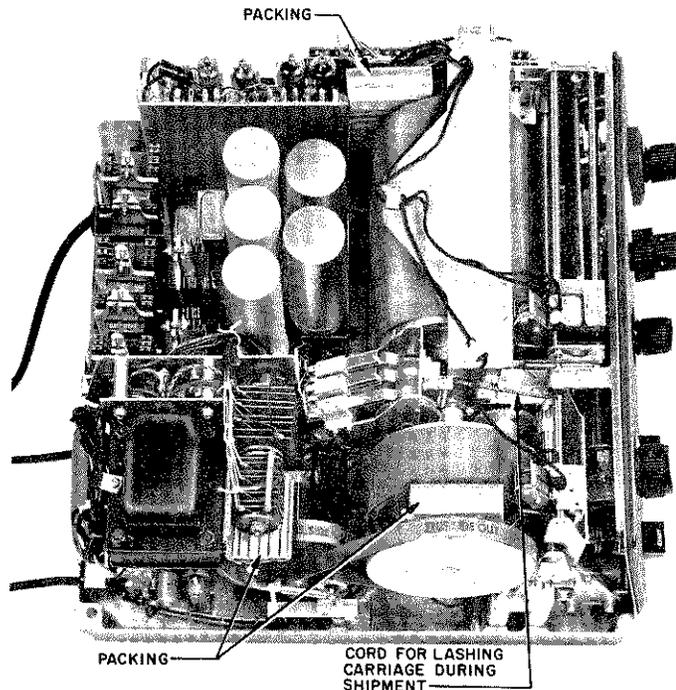


Fig. 2 — Telephone Answering Set

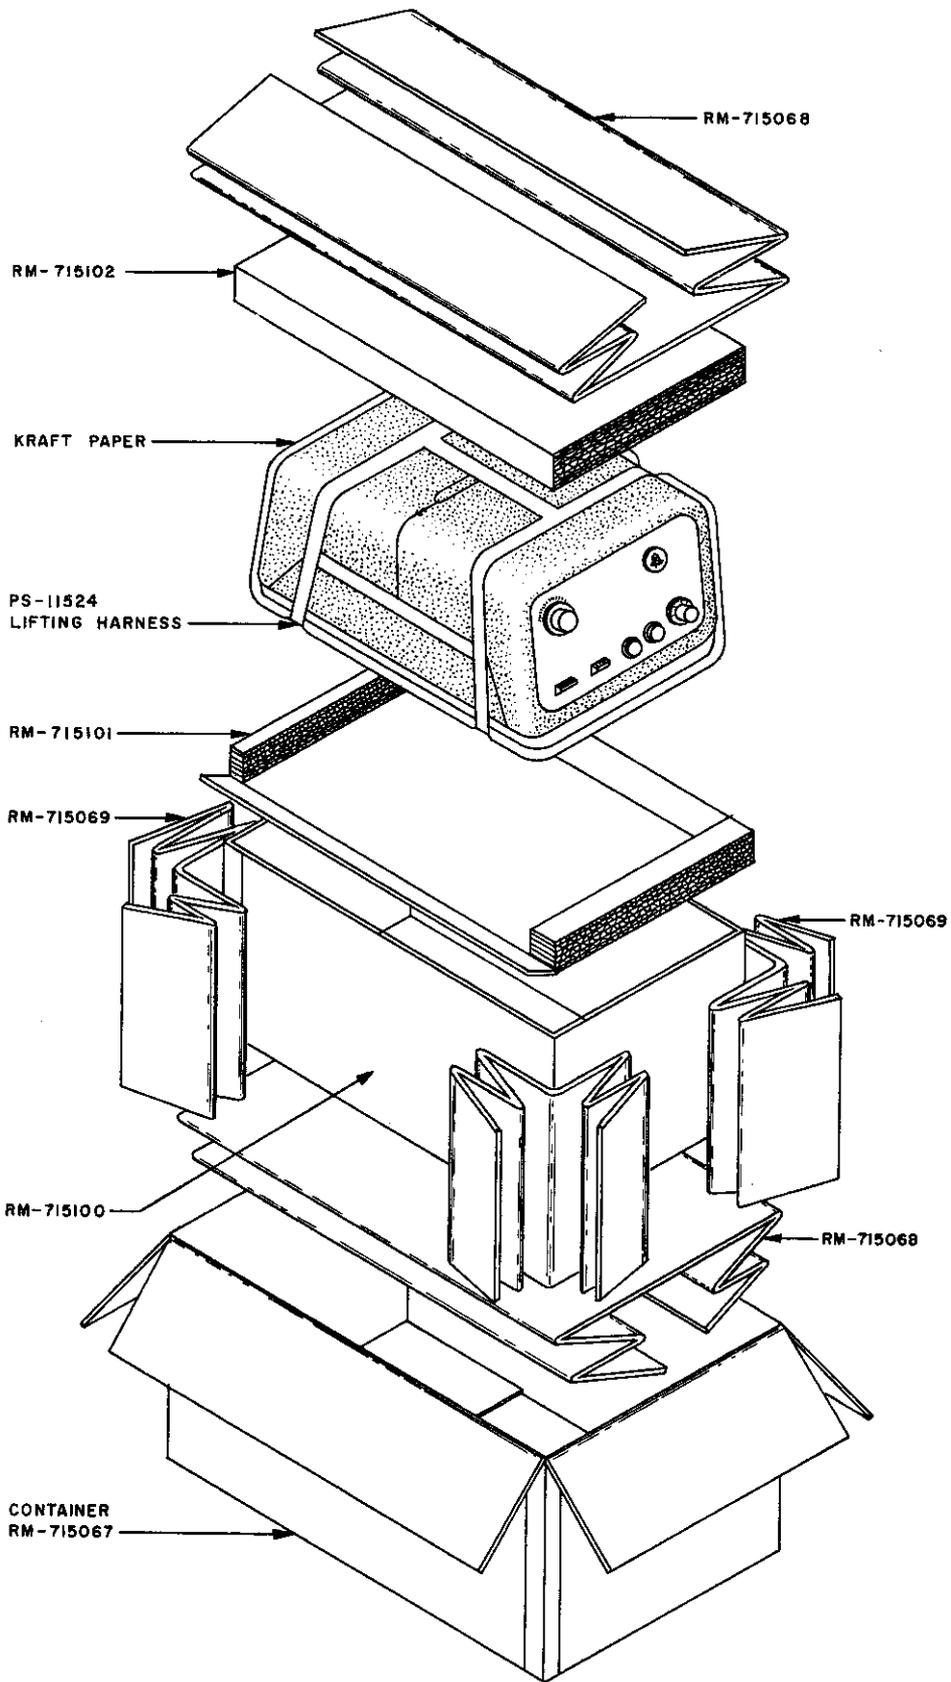


Fig. 3 - Packing Container