



8500 Massage Mechanism Replacement

Written By: Nick



 **TOOLS:**

- [Cordless Drill](#) (1)
- [Zip Ties](#) (1)
- [Phillips #2 Screwdriver](#) (1)
- [Flush Wire Cutters](#) (1)

Step 1 — Massage Mechanism




- The back cover is covered by this leather cover, which unzips easily.
- Zipper is located here and there are 2 of these on either side.

Step 2



- Remove all 6 screws


Step 3

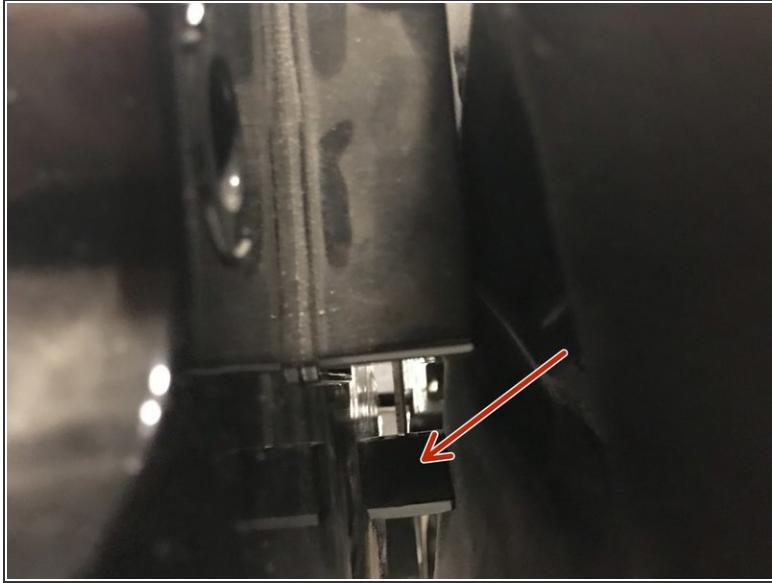

(i) At this point you should have the speakers dismounted and armrests unlatched.

- Press Down on Latch between armrest and chair body .
- What the result should look like.

Step 4

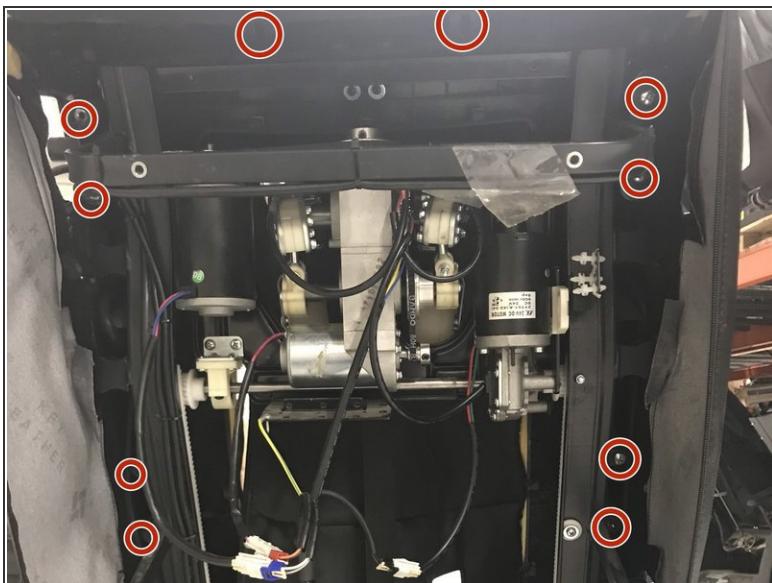


- Remove all 12 screws from the frame.

Step 5



- Note the speaker bracket will need be threaded through its leather slot and left hanging inside the back of the chair.
- Next you will need to remove the leather from the Posts . To do this simply pull the leather over each post.



Step 6

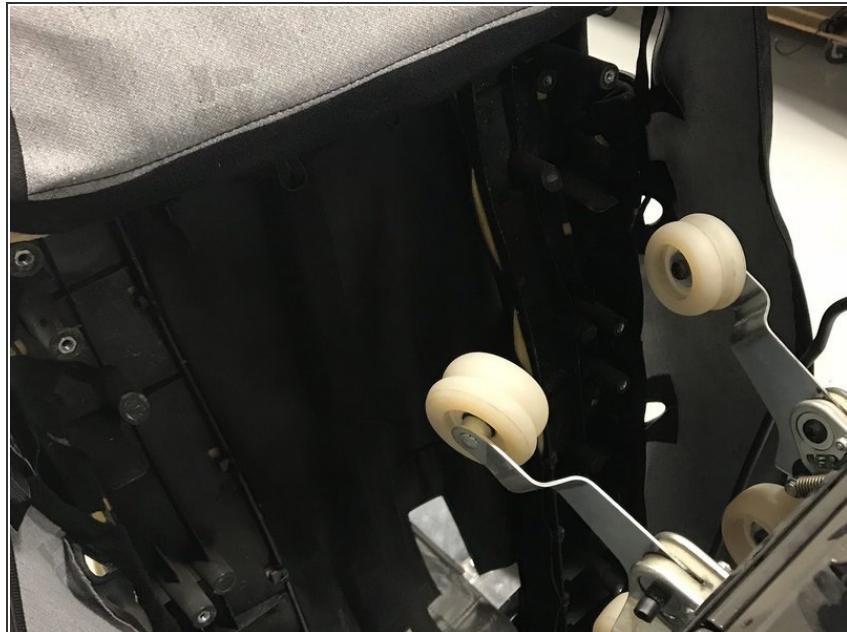

 The chair piece should separate from the frame with ease , should not have to force it . See previous step


 From here that chair piece should hold itself up while you remove that mechanism.

Step 7

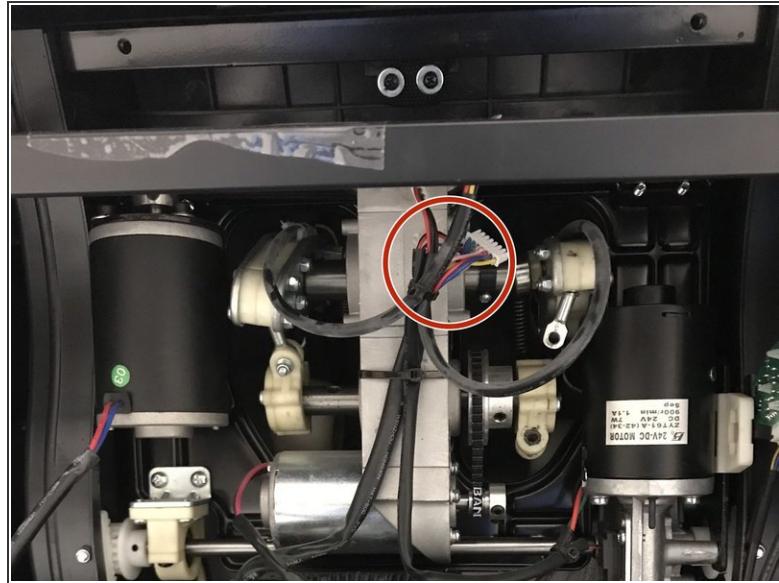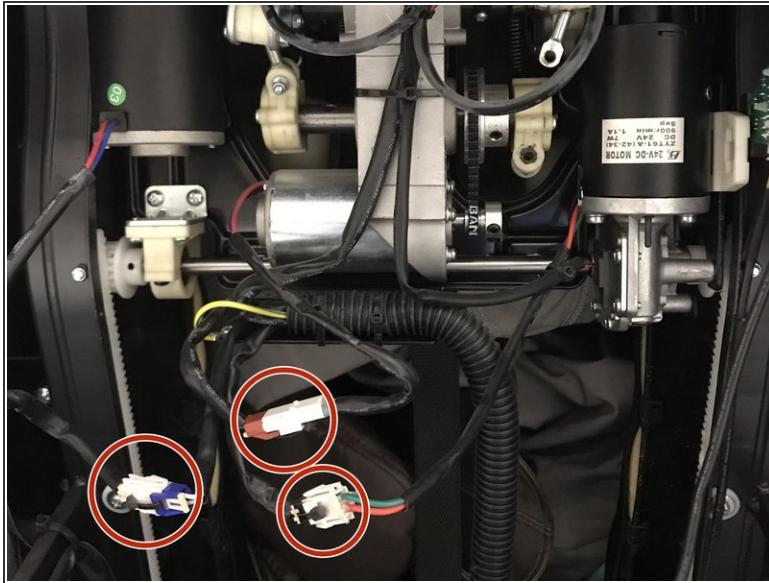

- Now we need to disconnect the wire harness from the mechanism . Do this by simply unplugging the marked cables


Step 8 — Wire harness

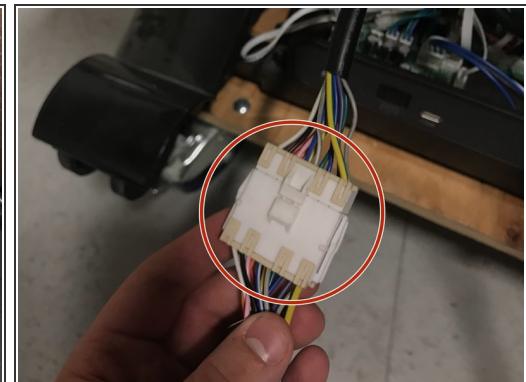

⚠ ONLY FOLLOW THIS STEP AND THE NEXT IF YOU ARE REPLACING THE ENTIRE WIRE HARNESS IF NOT THEN SKIP THIS AND STEP 9.

- When replacing the wire harness you need to disconnect the upper portion of the harness from the mechanism and then locate the quick disconnect .
- Quick disconnect

Step 9 — Wire Harness

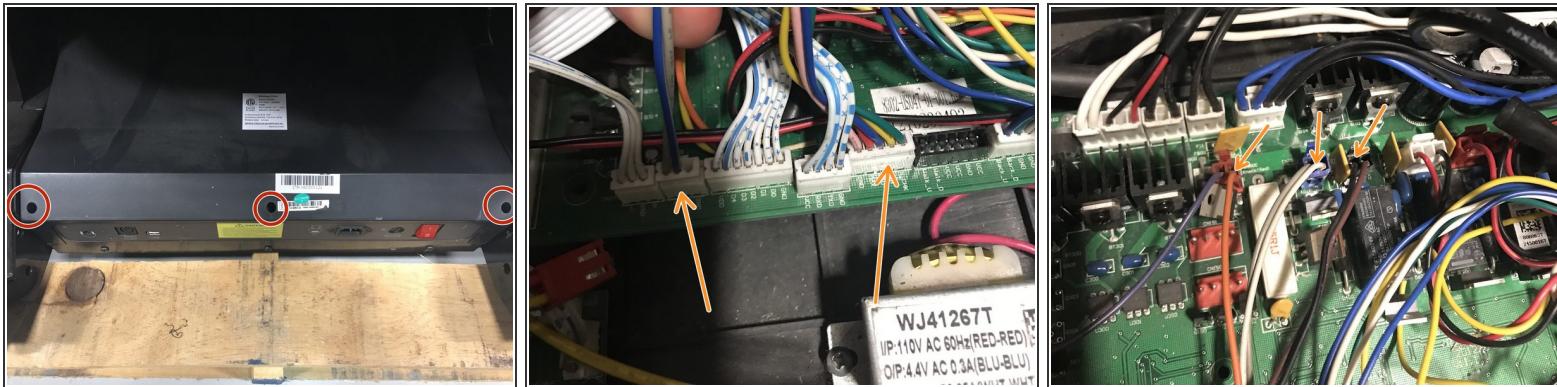

(i) This step will show you where the wires are for the lower portion of the harness.

- Remove the 3 screws
- These are the locations of the the wires for the lower harness

Step 10



- Remove all 4 screws on top bar

Step 11



ⓘ Next attach a flat head bit to a cordless drill and insert it into the top of the Up and Down motor. this will allow you to drive the mechanism out the top of the track.

Step 12



ⓘ ALL DONE!

To reassemble your device, follow these instructions in reverse order.