




# Access to RAM and CPU from why! W253EU

## (German)

Remove the cover to access the memory modules (RAM), processor, Wi-Fi / Bluetooth chipset and BIOS battery.

Written By: Felice Suglia

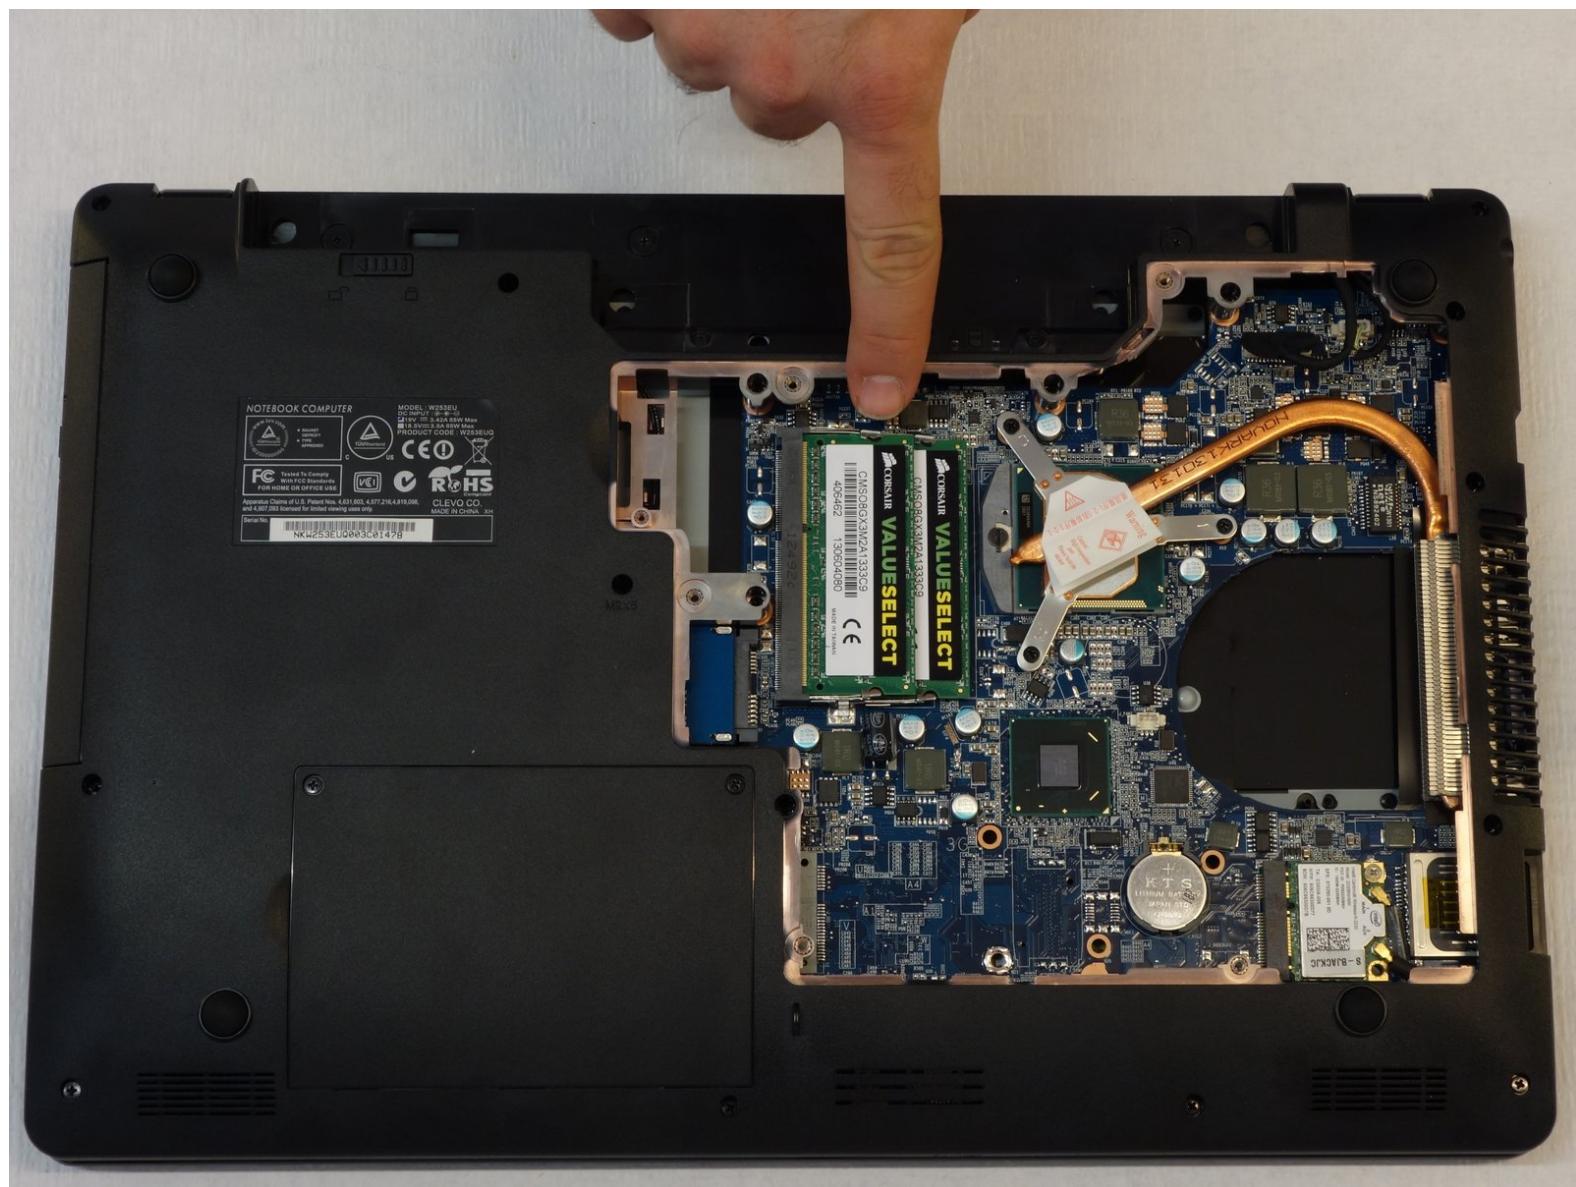


This document was generated on 2019-11-05 08:51:40 AM (MST).

 **TOOLS:**


- Phillips #1 Screwdriver (1)

## Step 1 — Battery from why! Remove W253EU

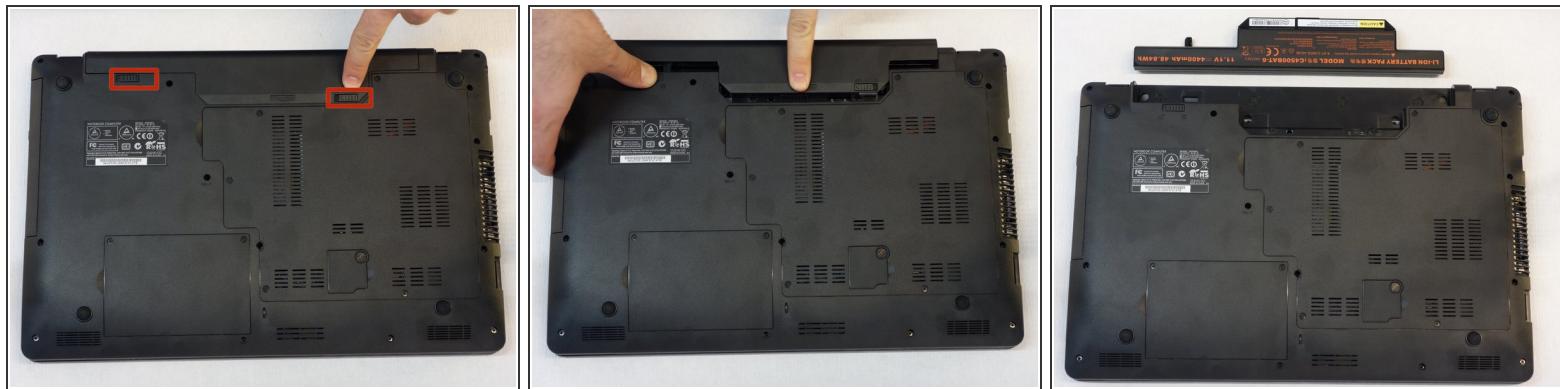


- Turn off the computer.
- Before each operation it is important to start with the removal of the accumulator.
- Take the slide unlocked into position, remove the battery.

## Step 2 — Access to RAM and CPU from why! W253EU (German)

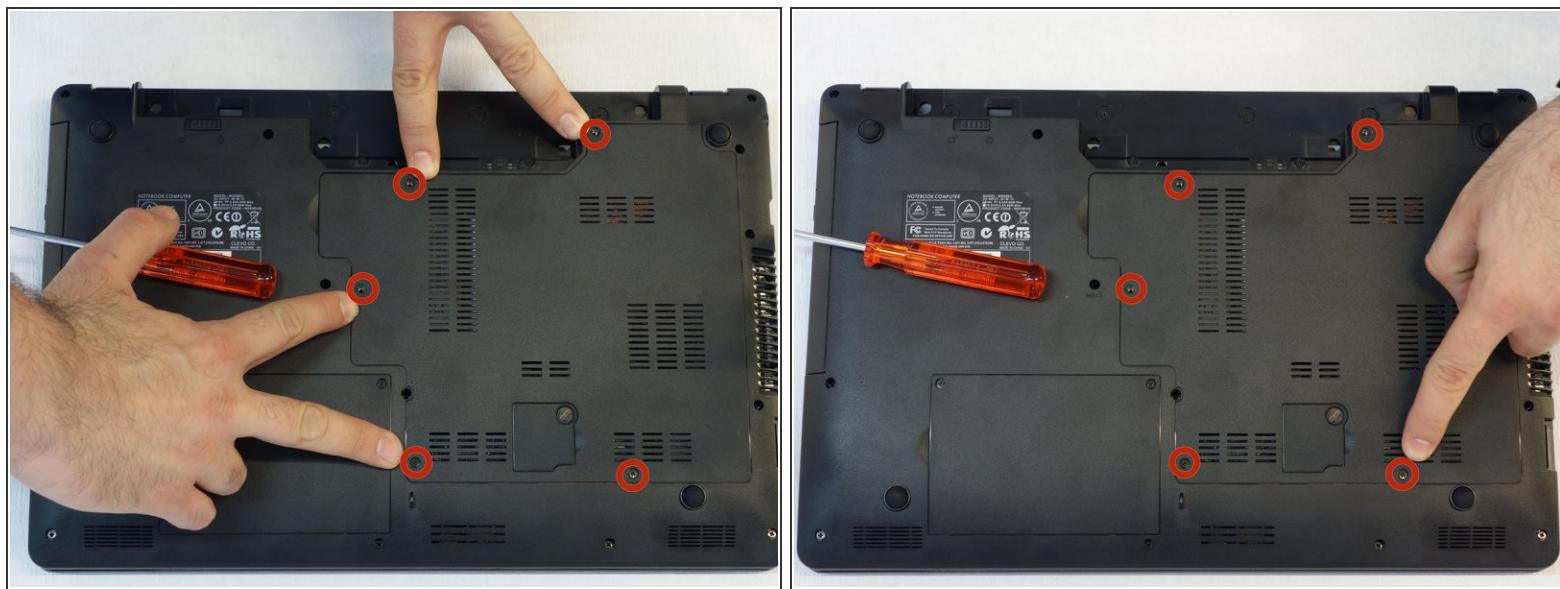


- Using the screwdriver Philips # 1, unscrew the 5 fixing screws of the cover.

## Step 3

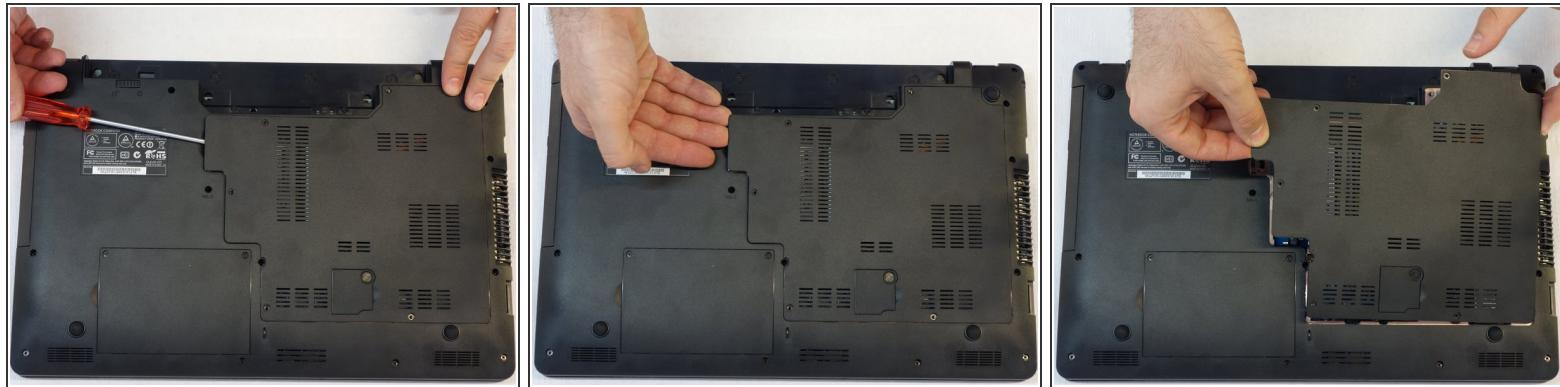

- Push the screwdriver a few millimeters under the cover so that it can be touched with your fingers.
- Now lift the cover carefully.
- Attention! Disconnect the ventilator cable so that the cover can be completely removed (see next step).

## Step 4

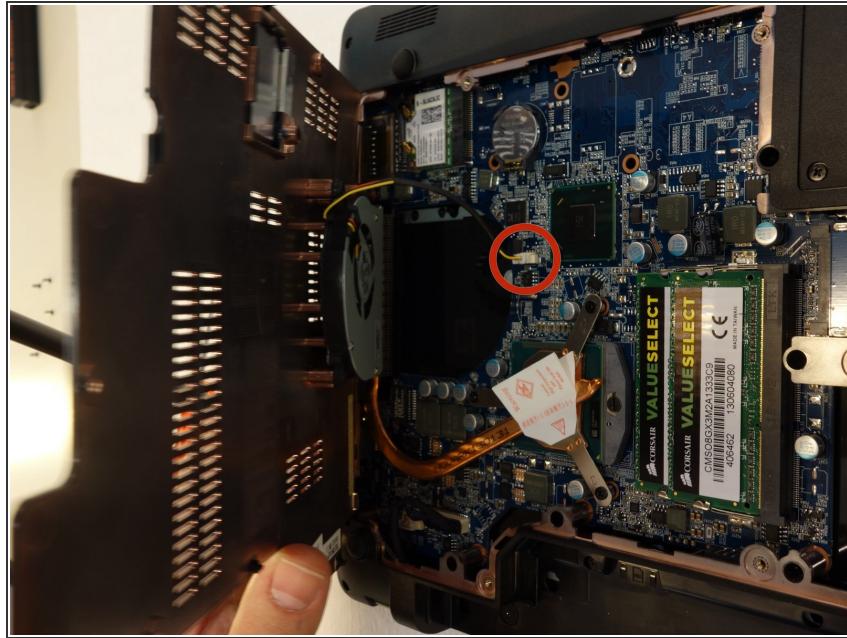

- Since the ventilator is mounted under the cover, its power supply cable must first be disconnected so that the cover can then be completely removed.

For reassembly, follow the instructions in reverse order.