




Acer TravelMate TMB115-M-C99B Motherboard Replacement

How to replace the Acer TravelMate TMB115-M-C99B motherboard.

Written By: Melissa Martinez

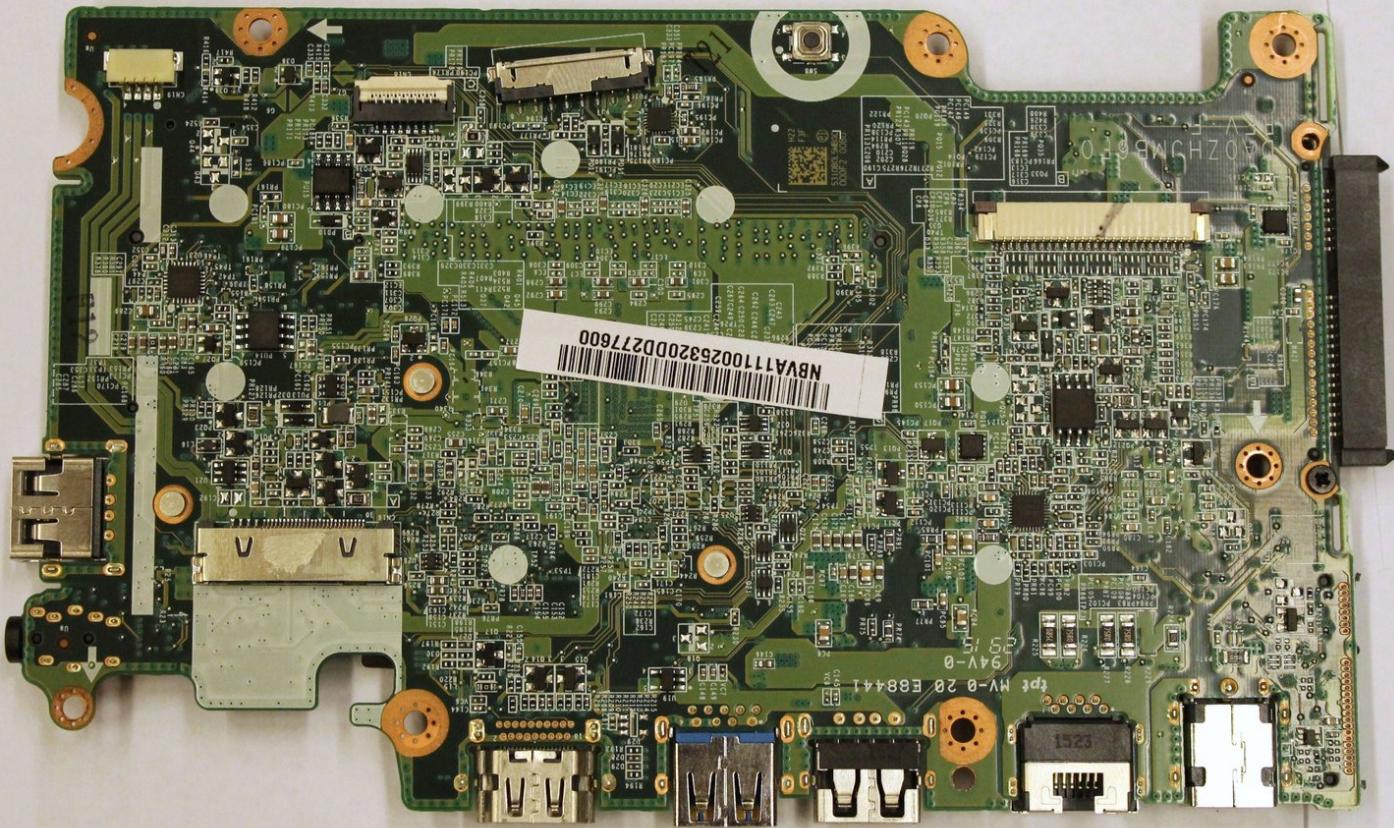

INTRODUCTION

If your laptop is experiencing internal communication issues, use this guide to remove and replace your motherboard.

TOOLS:

- [Phillips #0 Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)
- [Magnetic Project Mat](#) (1)

Step 1 — Battery

 Turn off your laptop before starting.

- Flip the laptop over so the model stickers face the ceiling.



Step 2



- Remove the thirteen 6mm Phillips screws using the #0 screwdriver.
- Remove the back of the laptop.

Step 3



- Remove the two 7mm Phillips screws from the battery using the #0 screwdriver.

Step 4




- Unplug the battery from the motherboard.

Step 5 — Hard Drive




- Carefully disconnect the hard drive from the motherboard.

Step 6 — Motherboard

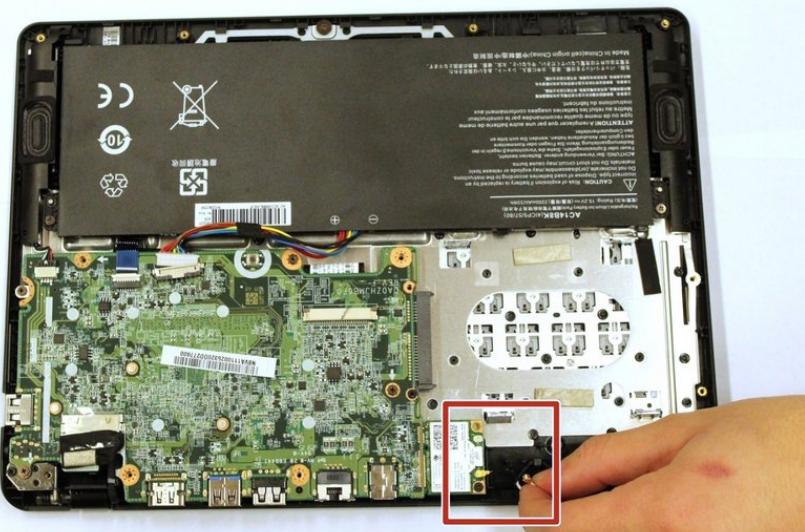


- Disconnect the two wires from the Wi-Fi interface.

Step 7

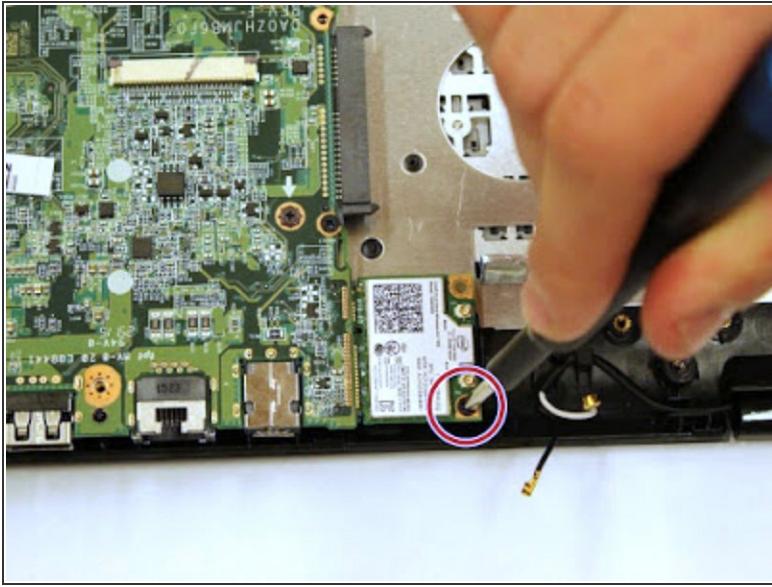


- Remove one 6mm Phillips screw from the Wi-Fi interface using the #0 screwdriver.

Step 8

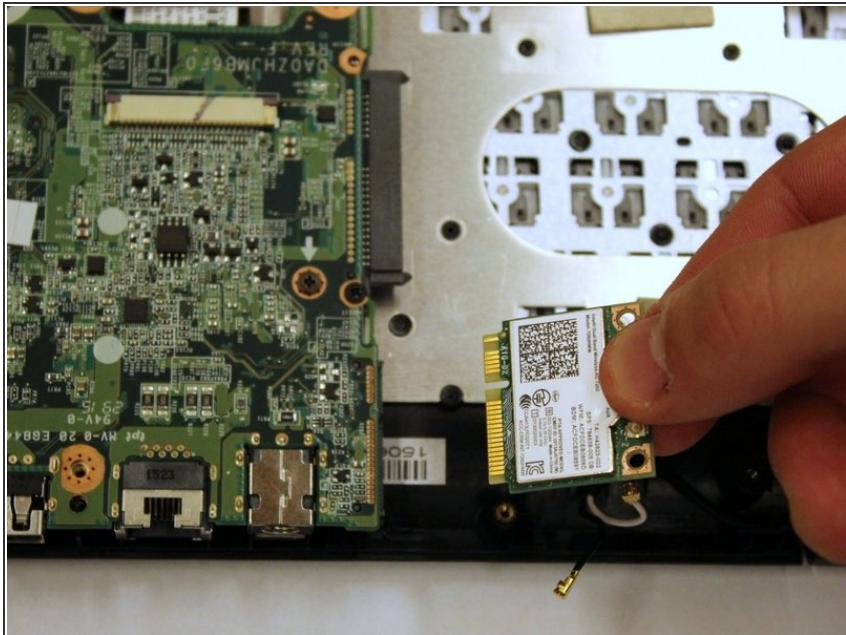


- Remove the Wi-Fi interface from the motherboard.

Step 9

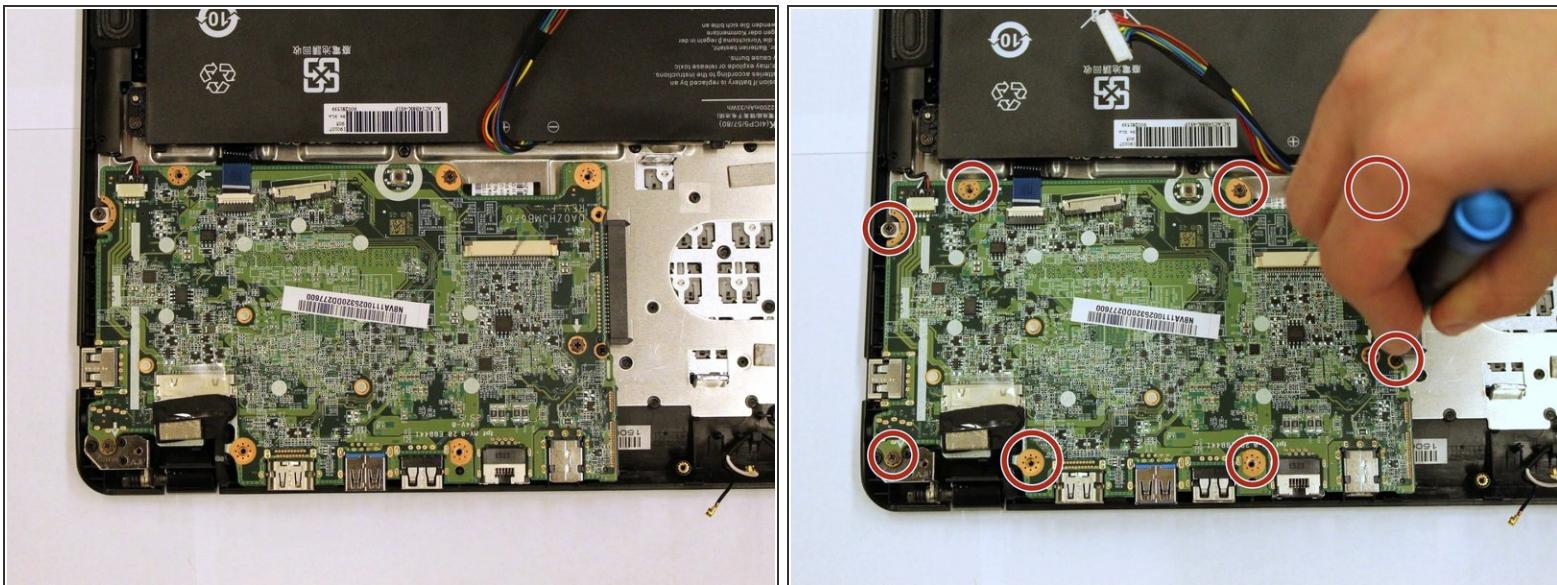

- Remove the eight 7mm Phillips screws from the motherboard using the #0 screwdriver.

Step 10

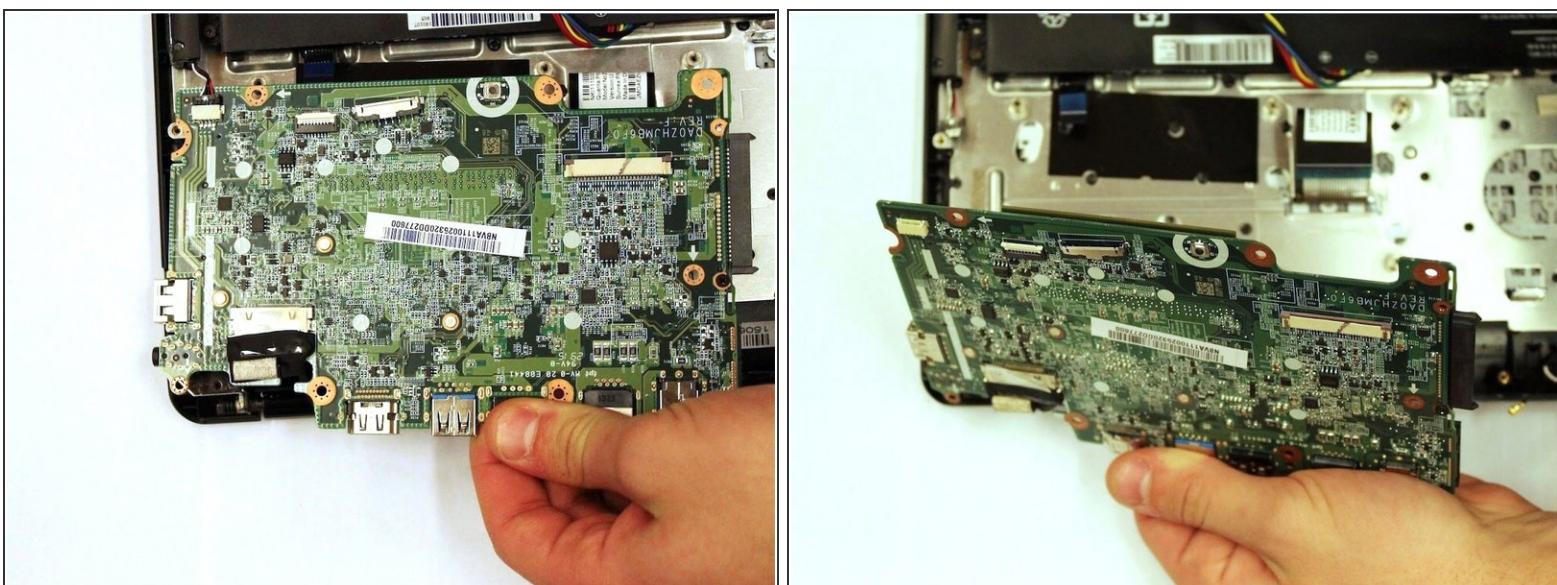

- Remove the motherboard.

To reassemble your device, follow these instructions in reverse order.