

SERVICE 2500D TELEPHONE SETS

1. GENERAL

1.01 Reissued to add nontechnical changes to Fig. 1, 2 and Tables A, B.

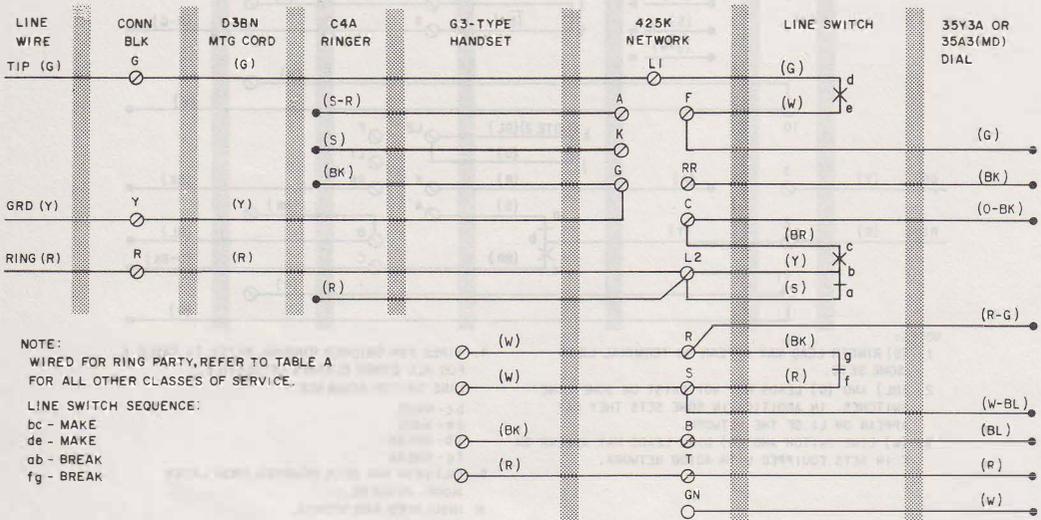


Fig. 1—2500D Telephone Set, Connections

TABLE A
LINE AND RINGER CONNECTIONS

LEAD	COLOR	INDIVID. OR BRIDGED	RING PARTY	TIP PARTY		
				NO IDENT GROUND	IDENTIFYING GROUND	
					1000Ω	2650Ω
Mtg Cord at Conn Block	(R) (G) (Y)	R G G	R G Y	R G Y	G R Y	G R Y
Ringer Leads	(R) (BK) (S) (S-R)	L2 G K A	L2 G K A	L1 G K A	K G B B	B B K G
Line Switch	(S) (W)[S-W] (BR)[S-BR]	L2 F C	L2 F C	L2 F C	A C F	A C F

Note: To permanently silence ringer, insulate and store.

1. For all classes of service except identifying ground — (BK) ringer lead.
2. For 1000 ohm ground — (S-R) ringer lead.
3. For 2650 ohm ground — (BK) ringer lead.

() Current color code.

[] MD color code.

TABLE B
POLARITY GUARD CONNECTIONS
(P-90D052 GUARD ASSEMBLY)

LEAD	COLOR	REMOVE FROM	CONNECT TO	
		NET.	NET.	POLARITY GUARD
Dial	BK	RR		T
Line Switch	*	C		S
Polarity Guard	G W		RR C	

* Depending on class of service per Table A.

Note: For use when specified by local instructions for end-to-end signaling installations.