


SERVICE
558F TELEPHONE SETS

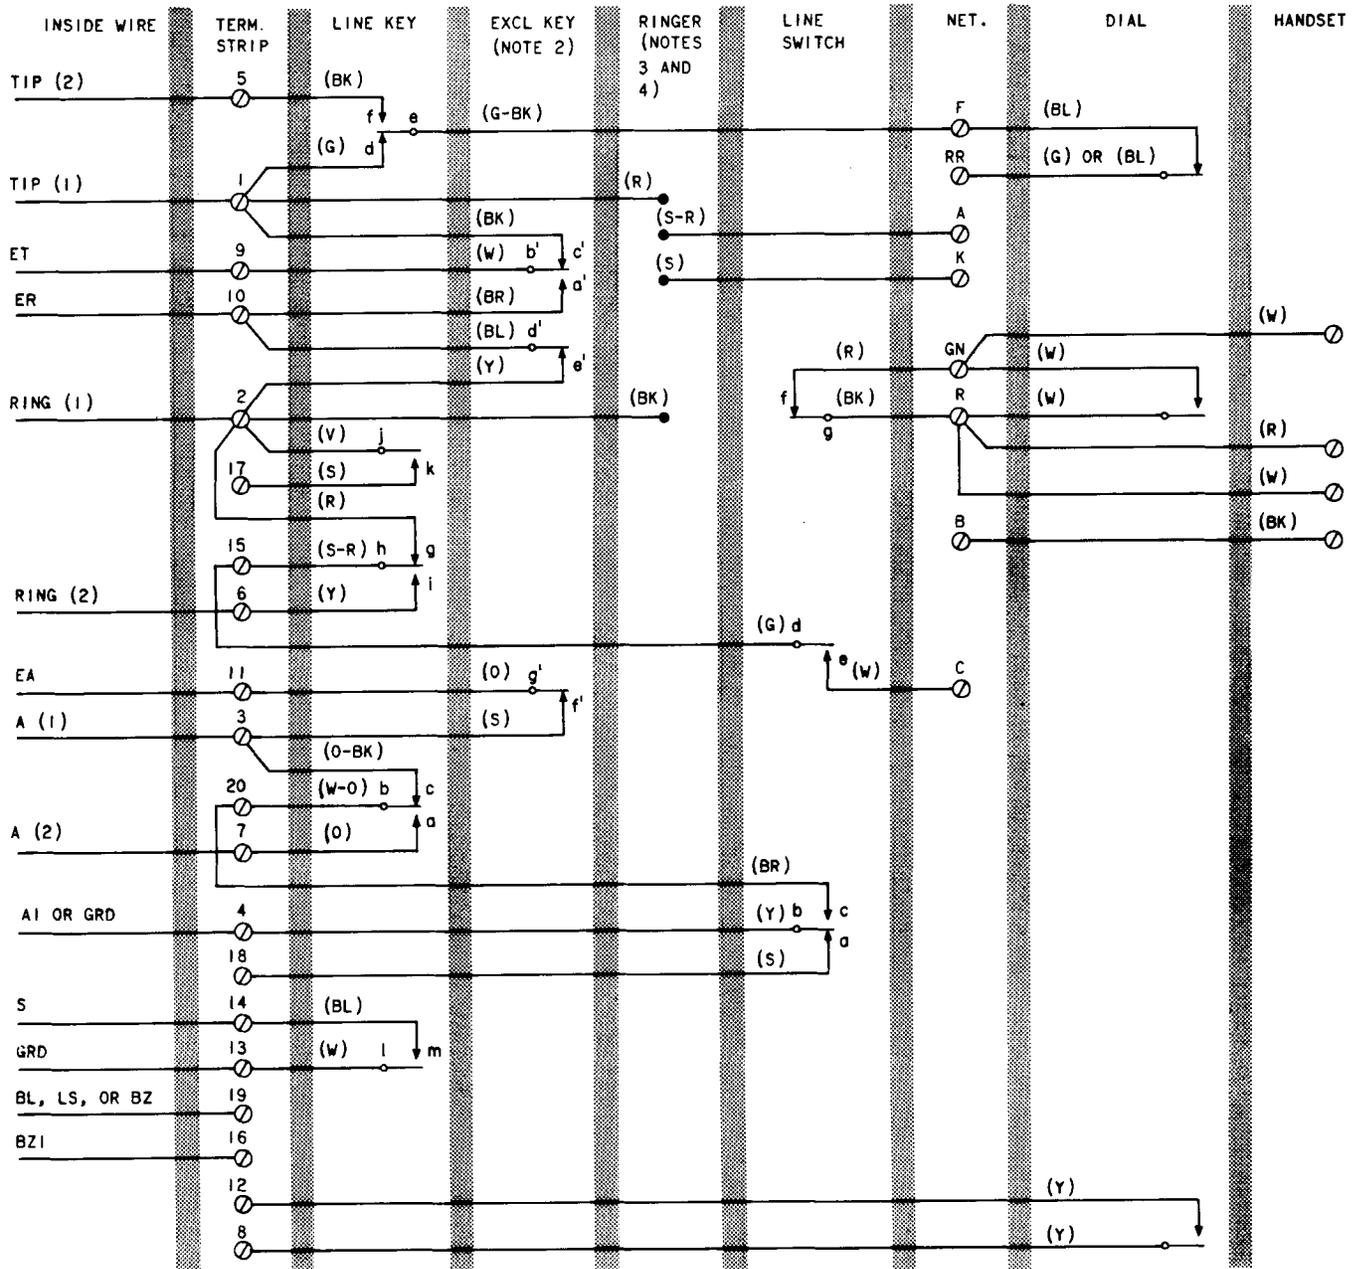

- NOTES:
1. SET FACTORY-WIRED FOR BRIDGED SERVICE.
 2. TO PROVIDE EXCLUSION FOR LINE 2, CONNECT (BK), (Y), AND (S) EXCLUSION KEY LEADS TO TERMINALS 5, 6, AND 7 RESPECTIVELY.
 3. FOR RINGING ON LINE 2, TRANSFER (R) AND (BK) RINGER LEADS TO TERMINALS 5 AND 6 RESPECTIVELY.
 4. TO PERMANENTLY SILENCE RINGER, REMOVE (R) RINGER LEAD FROM TERM. 1, INSULATE AND STORE.

Fig. 1—558F Telephone Set Connections Wired for 2-Line Pickup With Exclusion on Line 1, Signaling, and Speakerphone (Factory Wired)