



Alcatel POP C9 OT7047 Touch Screen Glass Digitizer Replacement

Alcatel POP C9 OT7047 Touch Screen Glass Digitizer Replacement

Written By: ZFix



INTRODUCTION

_____ Video tutorial: _____

[video: <https://www.youtube.com/watch?v=DHmEST3S1BE>]



TOOLS:

- Phillips #0 Screwdriver (1)
- adhesive tape 3 mm (1)



PARTS:

- Alcatel POP C9 touch screen (1)

Step 1 — Battery Cover Removal




- The Battery / Back cover is secured to the main frame by plastic clips.
- Use a plastic tool to remove it.

Step 2 — Battery Disconnecting 1




- Use a Phillips screwdriver and remove the two screws secured the battery connector shield.
- With tweezers careful remove the battery connector shield.

Step 3 — Battery Disconnecting 2

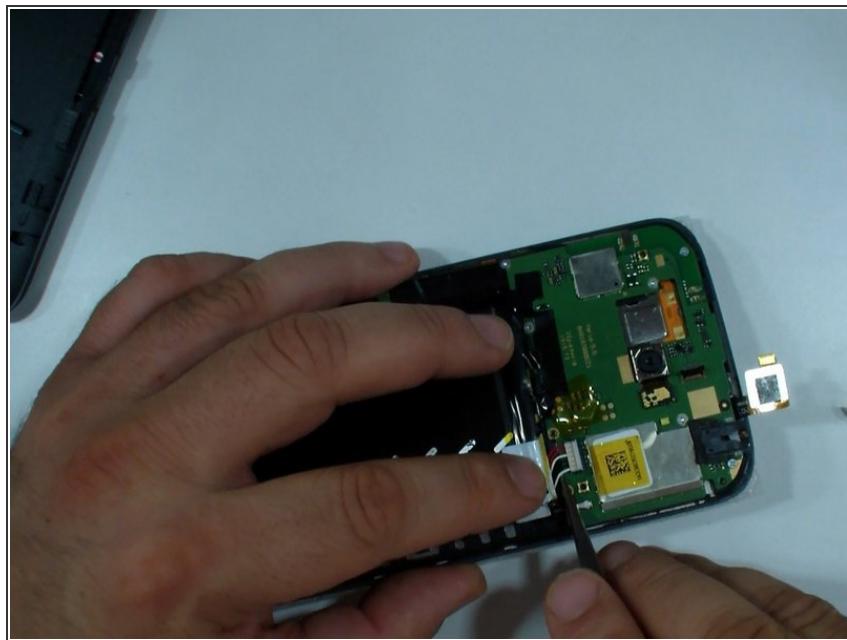


- Disconnect the battery cable.

Step 4 — Main Board removal 1

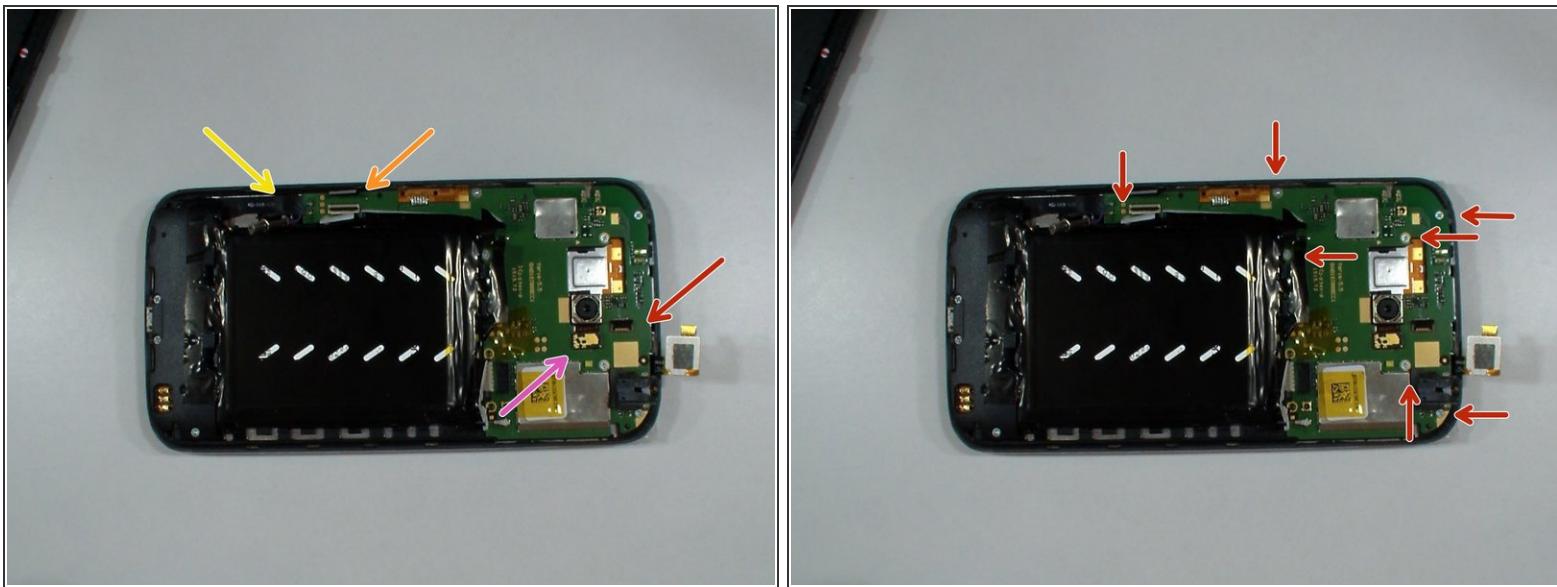

- Disconnect:
 - Touchscreen flex cable
 - Main Camera flex cable
 - LCD flex cable
 - Vibra-motor
- New line. Remove 7x Phillips screws.

Step 5

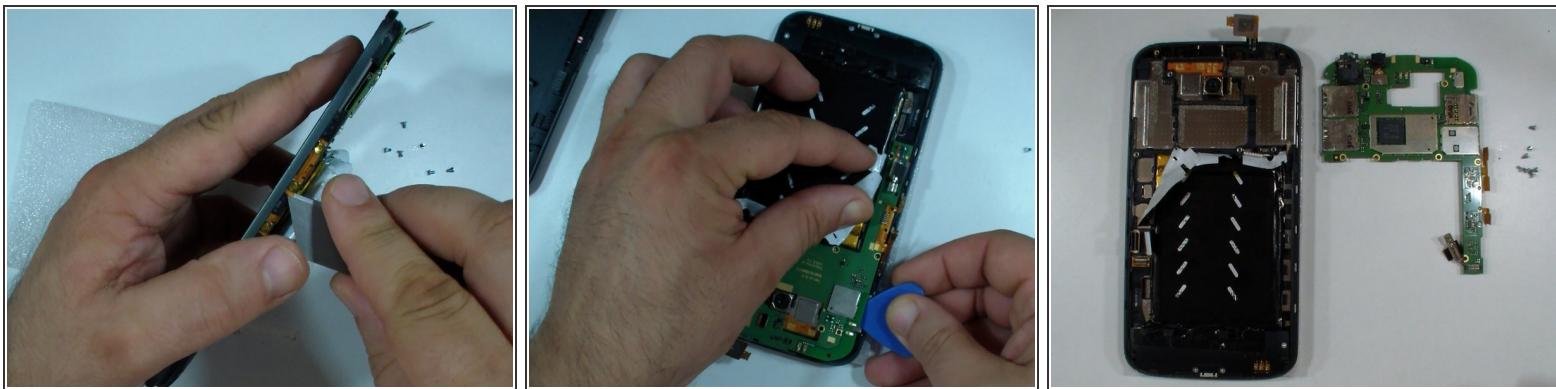

- Careful unstuck the Volume buttons flex cable and the Power button flex cable.
- Use a plastic tool and remove the Logic board.

Step 6 — Touch screen glass removal



- Use a hair dryer to warm the glass to soften the adhesive.
- Use a knife or tool with a sharp edge and start the separating the glass from the frame.
- Continue with a plastic tool.

Step 7



- Insert wisdom here.

Step 8



- Clean the frame and install a new adhesive tape.
- Install the touch screen.

To reassemble your device, follow these instructions in reverse order.