

## SERVICE

### 2558D AND 2558DM TELEPHONE SETS

#### 1. GENERAL

##### 1.01 Reissued to:

- Add D16J mounting cord, Fig. 2
- Show 2558D telephone set MD, Fig. 1.

TABLE A  
POLARITY GUARD CONNECTIONS (D-180190  
OR D-180547 GUARD ASSEMBLY) (Notes  
1, 2, and 3)

LEAD	COLOR	REMOVE FROM	CONNECT TO	
		NET.	NET.	POLARITY GUARD
Line Switch	W	C		S
Dial	BK	RR		T
Polarity Guard	W G		C RR	

Notes 1: For use when specified by local instructions for end-to-end signaling installations.

- 2: Telephone sets with baseplates having rectangular punched holes in the side flanges use the D-180547 or D-180190 guard assembly.
- 3: Telephone sets whose baseplates have open-topped cutouts in the side flanges require use of the D-180547 guard assembly.

#### NOTICE

Not for use or disclosure outside the  
Bell System except under written agreement



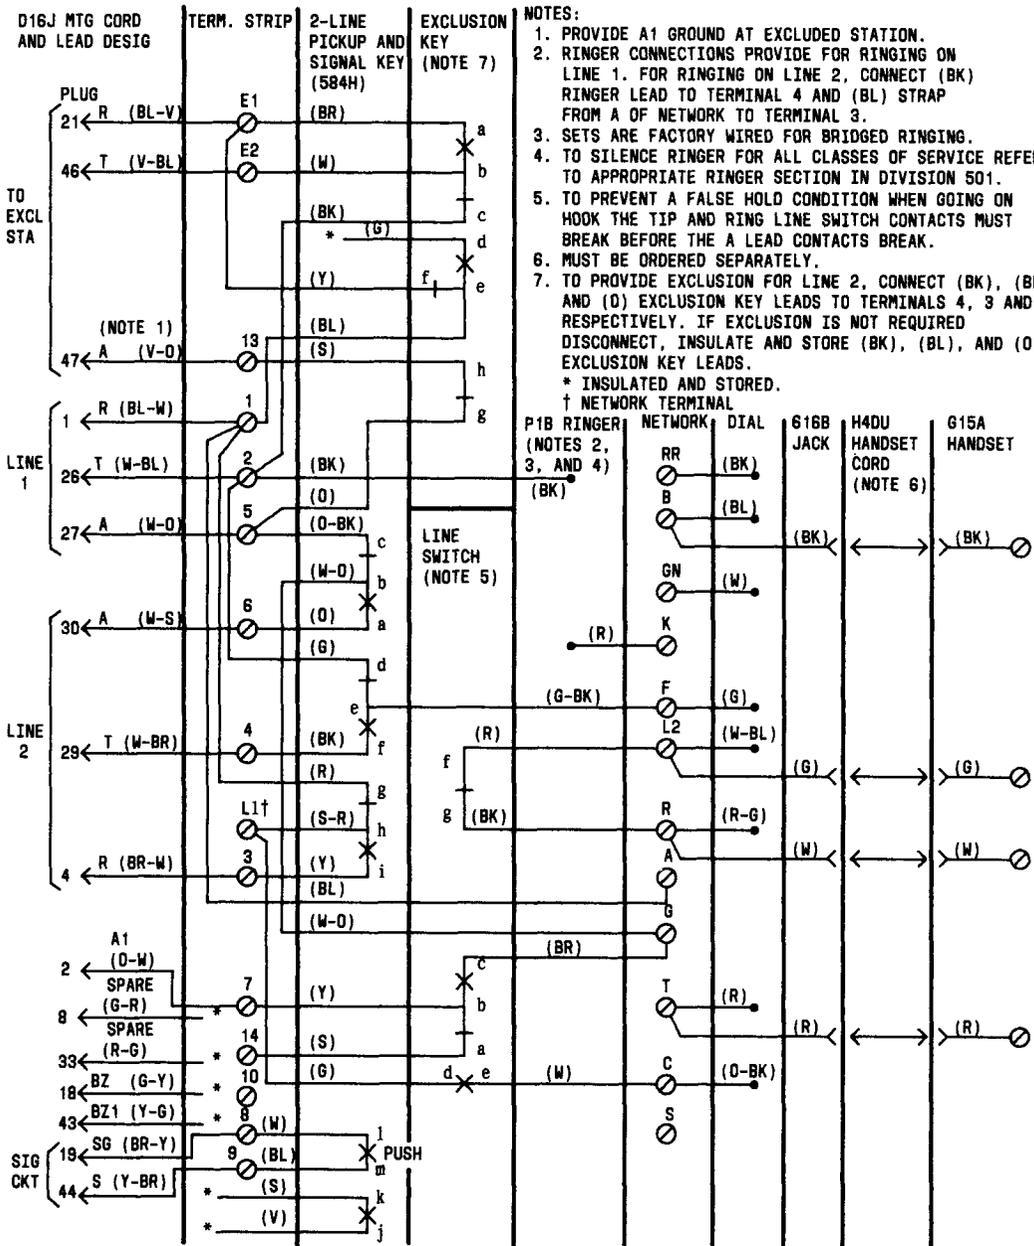


Fig. 2—2558DM Telephone Set, Connections (Factory Wired)