

SERVICE
566FB, 566MB, 566MD TELEPHONE SETS
AND
6040D, 6041D, 6040K, 6041K KEYS

1. GENERAL

1.01 This section provides connection information for the 566FB (MD), 566MB (MD), and 566MD telephone sets and 6040D (MD), 6041D (MD), 6040K, and 6041K keys used with the 755A PBX. This information was formerly found in Section 502-529-400 which will be canceled.

1.02 Refer to the appropriate reference section in Division 502 for identification and ordering information for these sets. Installation and maintenance information for these sets is found in Division 502, section entitled 540, 560, 1560, and 2560 Series—Common Installation and Maintenance Information.

1.03 Identification and installation information for the separately mounted keys is found in Division 512.

TABLE A

RINGER LIMITATIONS

STATION	MAXIMUM RINGERS
Conference	2
Nonconference	4

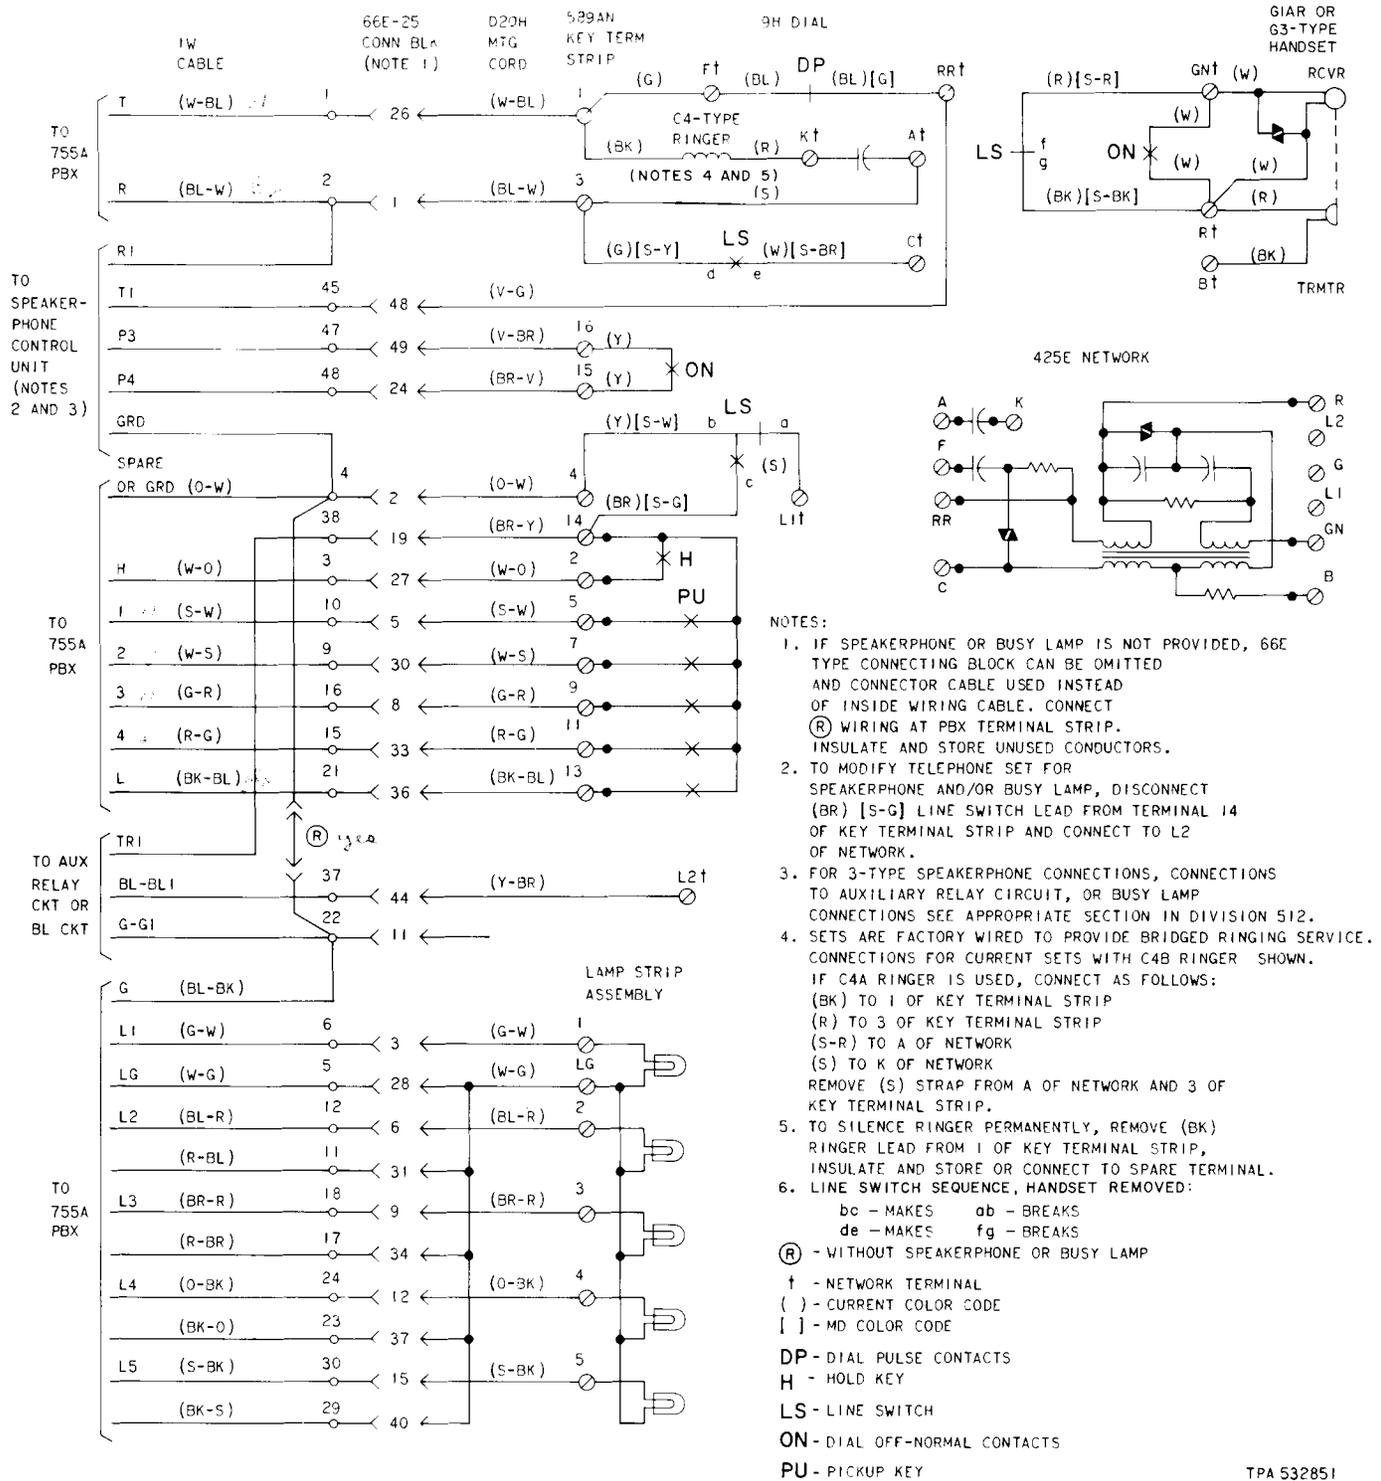


Fig. 1—566MD Telephone Set Connections to 755A PBX Using 66E Type Connecting Block, With Speakerphone and/or Busy Lamp

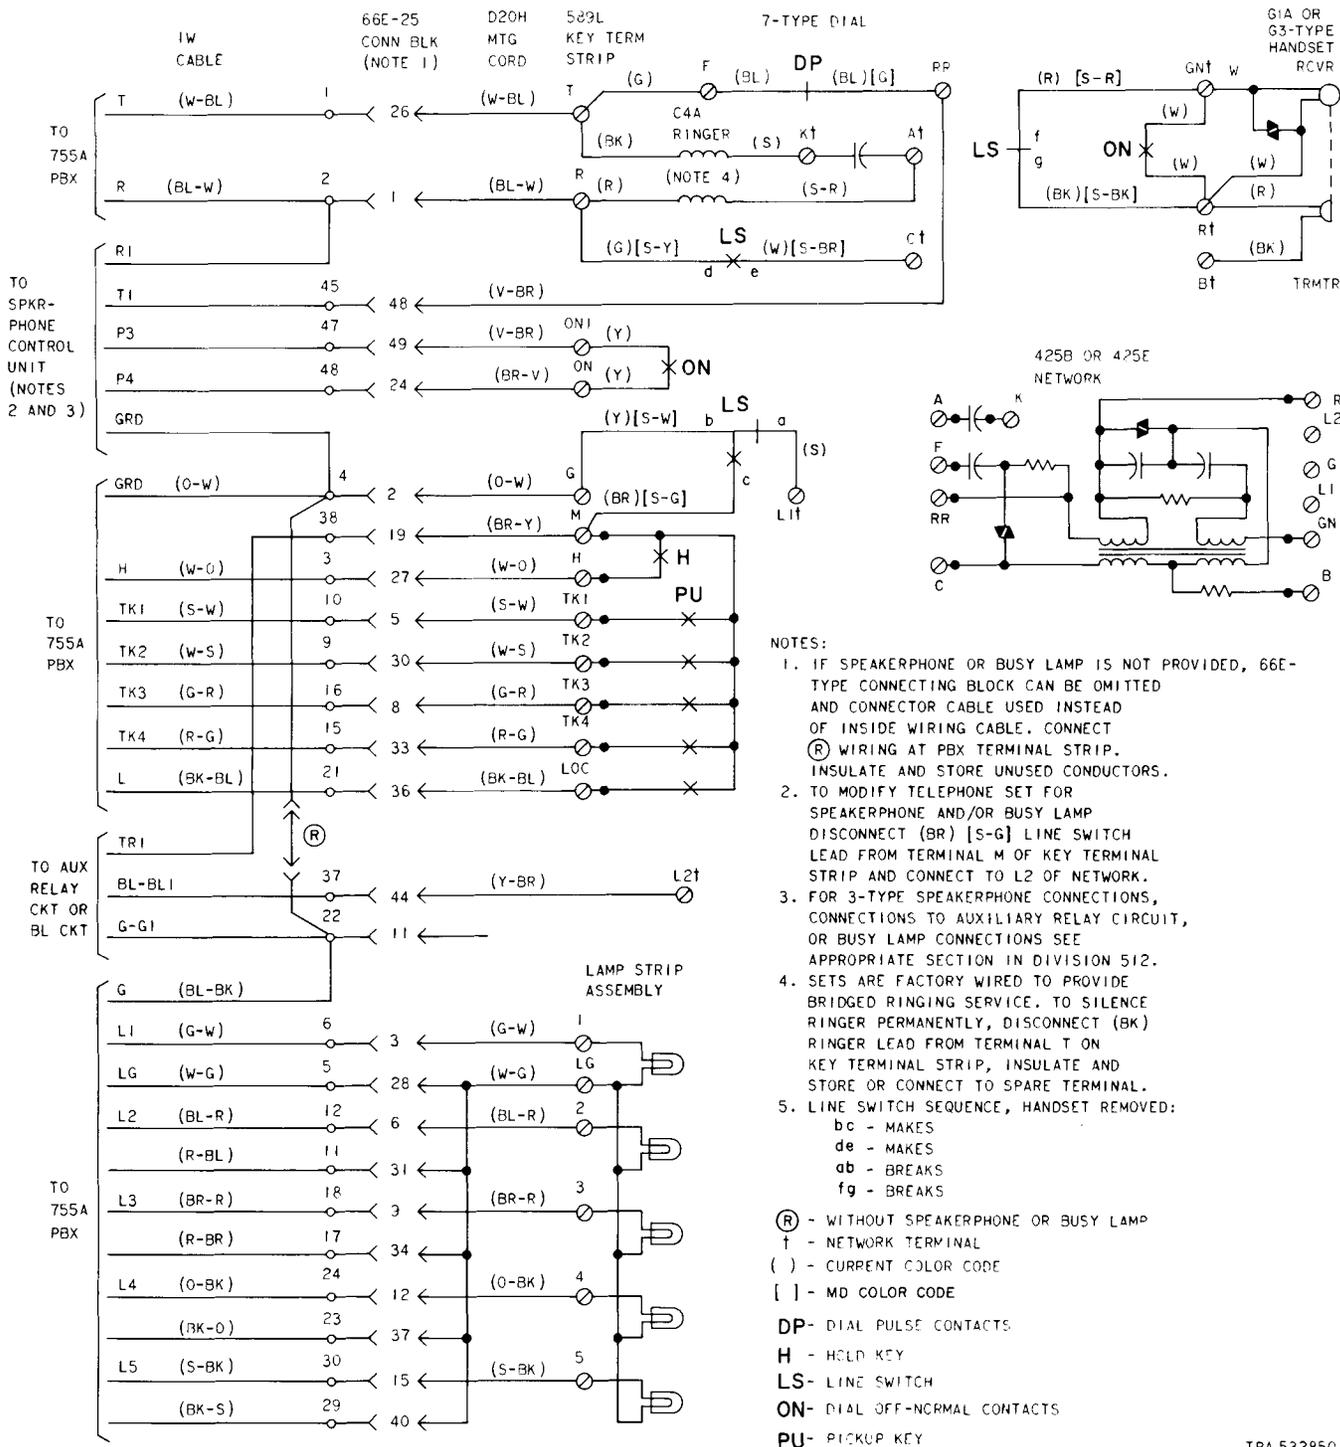


Fig. 2—566MB (MD) Telephone Set Connections to 755A PBX Using 66E Type Connecting Block, With Speakerphone and/or Busy Lamp

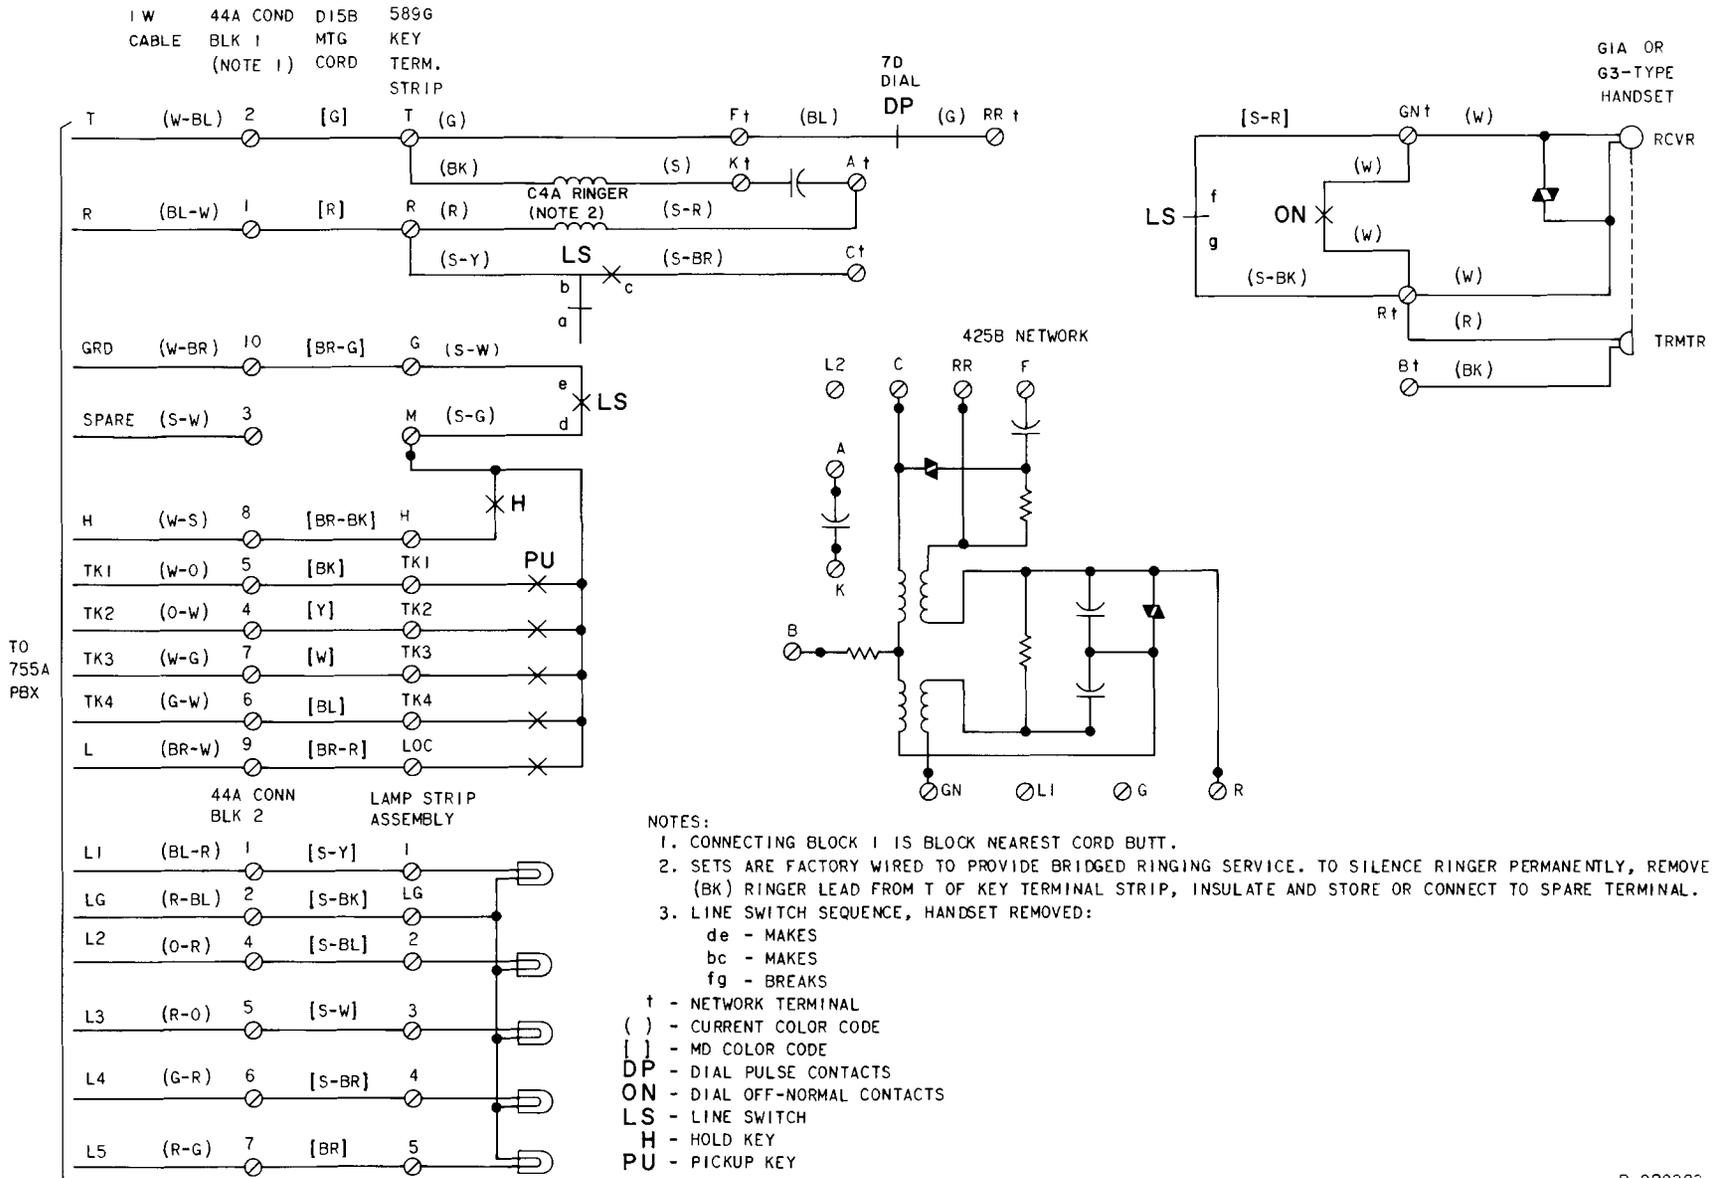


Fig. 3—566FB (MD) Telephone Set Connections to 755A Key

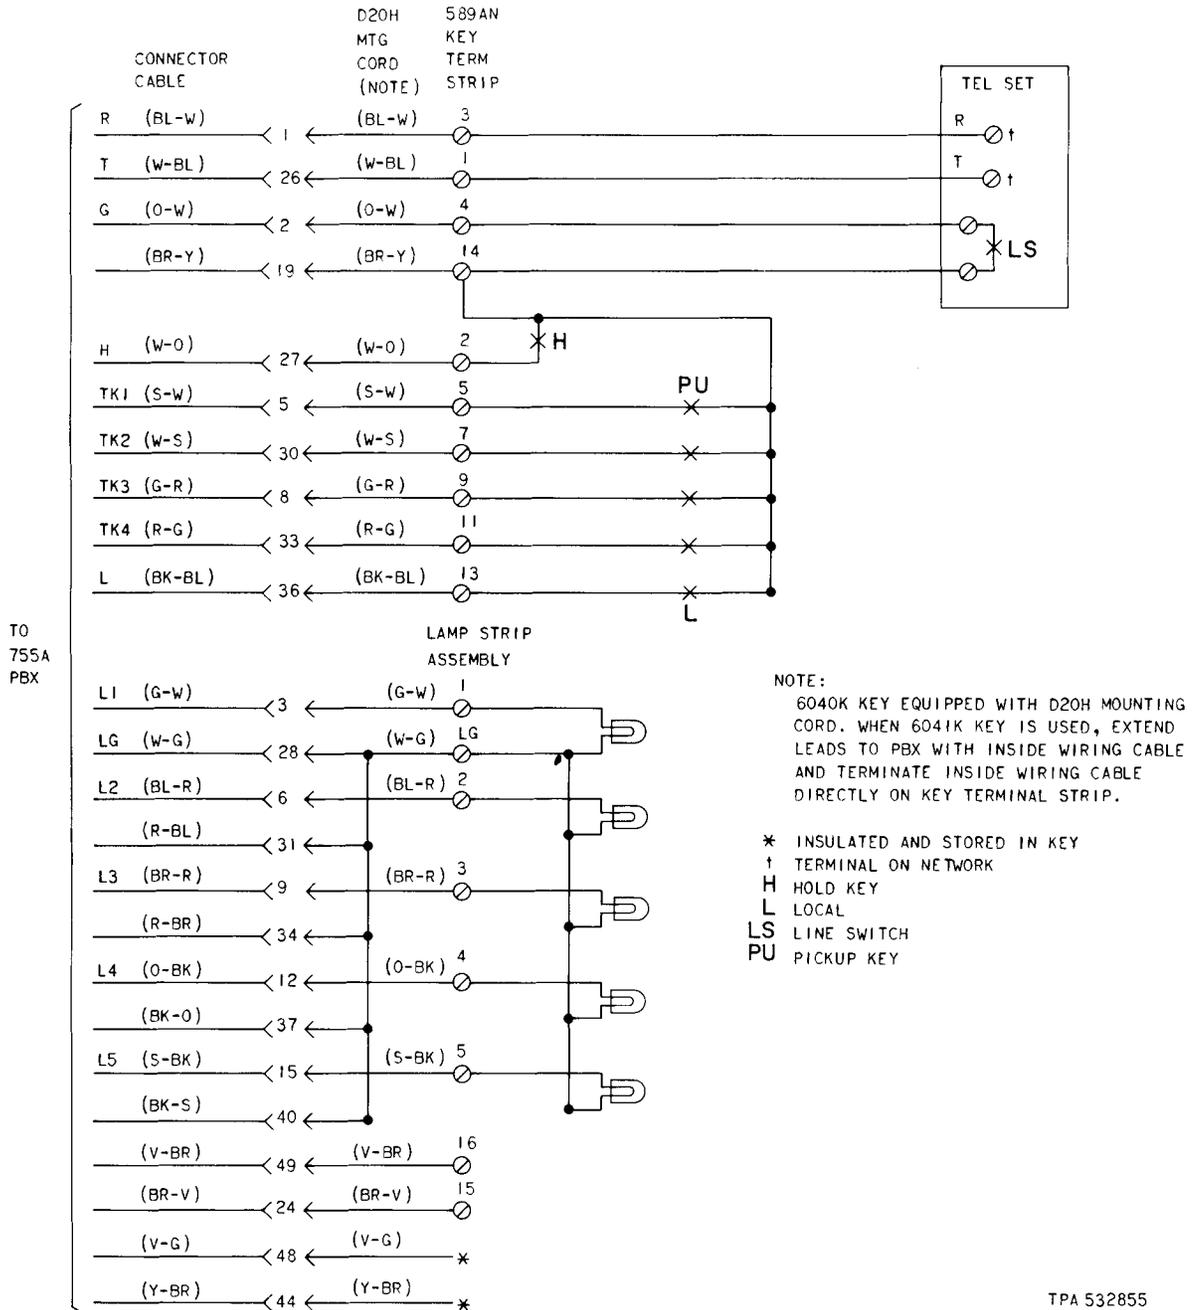


Fig. 4—6040K and 6041K Key Connections to 755A PBX

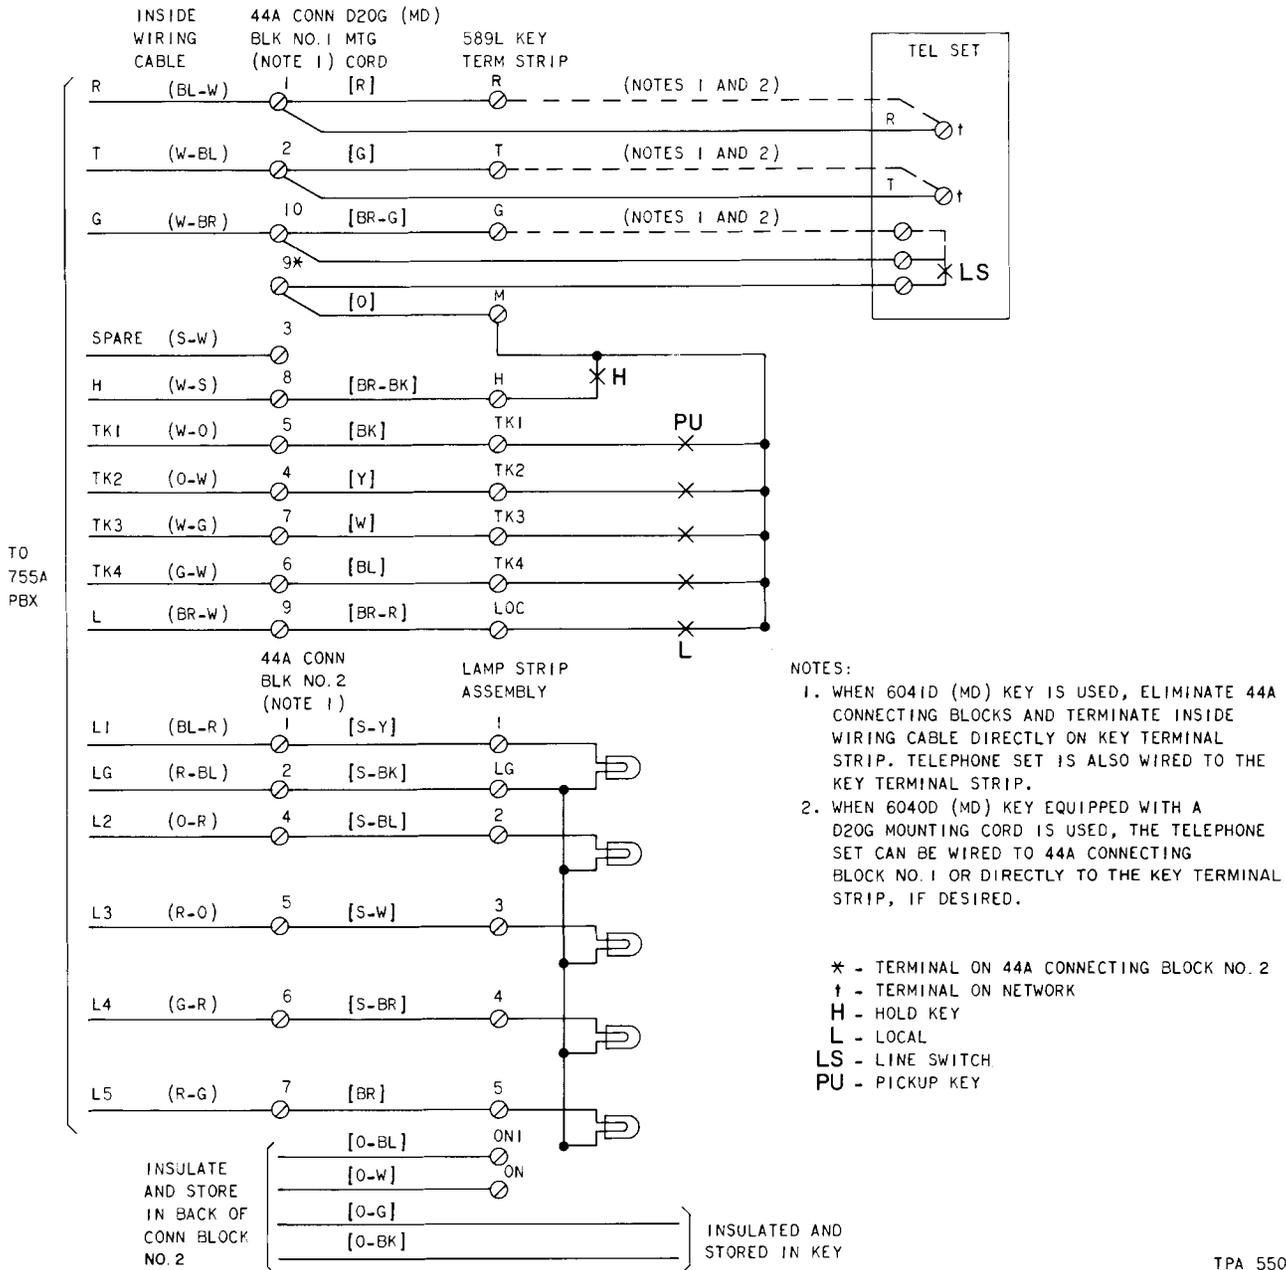


Fig. 5—6040D (MD) and 6041D (MD) Key Connections to 755A PBX

TPA 550516