


SERVICE  
500P TELEPHONE SETS

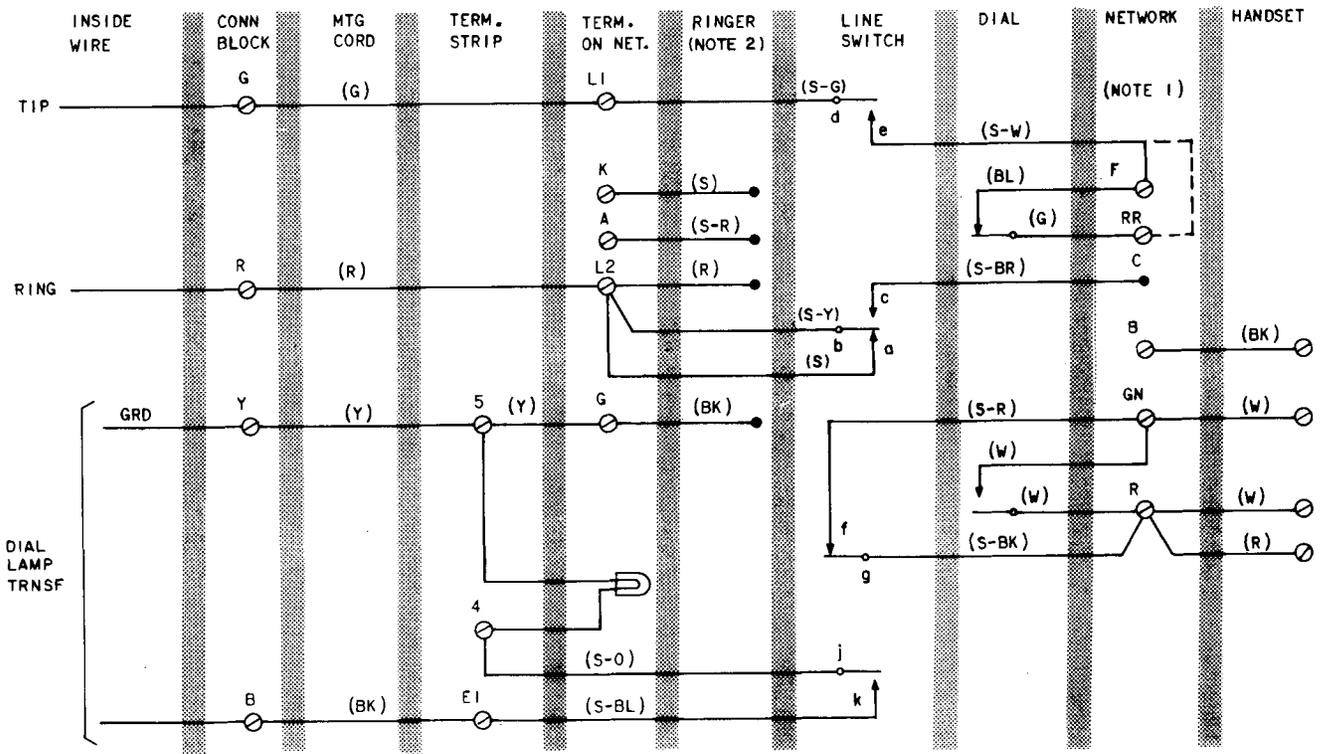

- NOTES:
1. FOR MANUAL SERVICE, MOVE (S-W) LEAD FROM F TO RR.
  2. TO SILENCE RINGER FOR ALL CLASSES OF SERVICE EXCEPT TIP PARTY IDENT. GROUND, CONNECT (BK) RINGER LEAD TO K TERMINAL ON NETWORK.
  3. RING PARTY CONNECTIONS SHOWN. FOR OTHER CLASSES OF SERVICE REFER TO TABLE A.

Fig. 1—500P (MD) Telephone Set, Connections

**TABLE A**  
**LINE AND RINGER CONNECTIONS**

WIRE OR LEAD		INDIVIDUAL OR BRIDGED	TIP PARTY NO IDENT GROUND	TIP PARTY IDENT GRD	
				1000Ω	2650Ω
Ringer Leads	R	L2	L2	K	B
	BK	L1	G	G	B
	S	K	K	B	K
	S-R	A	A	B	G
Line Switch	S	L2	L2	A	A
Mtg. Cord in Set	R	L2	L2	L2	L2
	G	L1	L1	L1	L1
	Y	5	5	5	5
	BK	E1	E1	E1	E1
Mtg. Cord at Conn. Block	R	R	G	G	G
	G	G	R	R	R
	Y	Y	Y	Y	Y
	BK	B	B	B	B