



Written By: Sam Goldheart



INTRODUCTION

Earlier this month, we tore down a [pair](#) of completely glued-together [smartphones](#). This week, we're ready for something designed to be repaired, not just replaced.

Early this year, Asus announced the Chromebook C202—an education-focused Chromebook designed to be inexpensive, rugged, and highly serviceable. That last bit caught our eye, and when Asus offered up a test unit for our examination, we gladly accepted, eager to investigate the claim.


This device is far from the bleeding edge, so we're not expecting advancements in pixel density, computing power, or chassis weight. Instead, we're hoping to find innovations in repairability. Let's crack this open and harvest the fruits of design-for-repairability labor.

Stay at the top of the class by following us on [Instagram](#), [Twitter](#), and [Facebook](#).

TOOLS:


- [Phillips #1 Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
 - [Phillips #00 Screwdriver](#) (1)
-

Step 1 — Asus Chromebook C202 Teardown

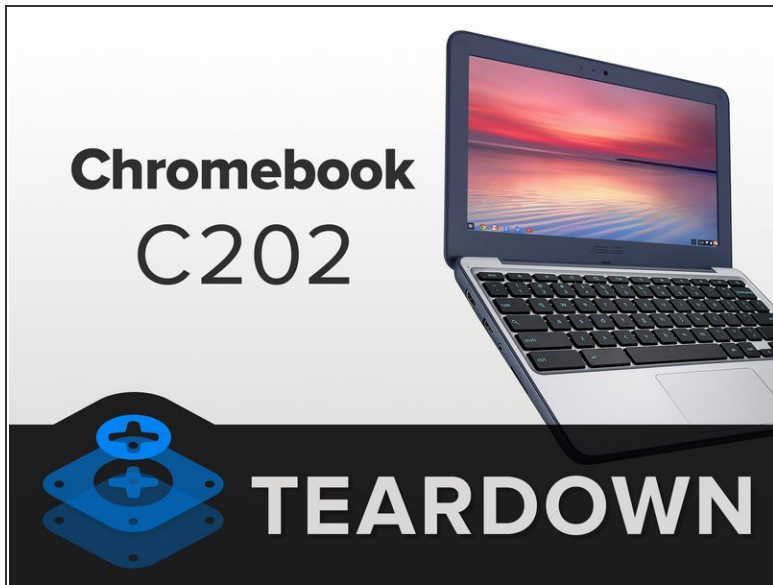

- Class, please welcome our newest student! Chromebook C202 comes from Asus, and will be joining us for today's lesson.
- Dual-core, 1.6 GHz Intel Celeron N3060 processor with burst speeds up to 2.48 GHz and integrated Intel HD Graphics 400
- 2 GB and 4 GB RAM configurations
- 16 GB on-board storage
- HDMI, SD card, and USB 3.0 connectivity
- Chrome OS
- 10-hour battery life
- ~~Hard candy shell~~ ruggedized wraparound rubber bumper

Step 2

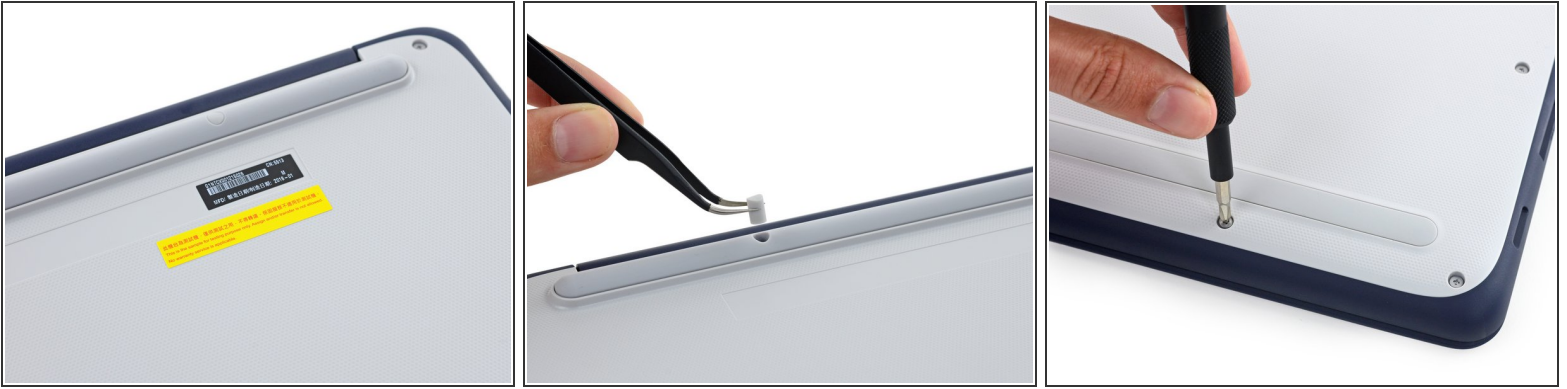

- The folks at Asus clearly have confidence in their new Chromebook. They sent us this sample unit for standardized testing, knowing we would immediately tear it apart.
- ⓘ For once, a warning label that *doesn't* threaten to void your warranty the moment you open something.
 - And there was much rejoicing.
- We grab our tools and get to work. We have to remove a rubber cover or two, but otherwise it's just standard Phillips screws securing the chassis.

Step 3




- With screws dispatched, we move on to the tool of choice. The [Plastic Opening Tool](#).
- Plastic clips around the edge of the spill-proof upper case secure it into the bathtub of a lower case—and after a bit of prying, we free them all. Let's open things up to see what's in store.
- Keyboard and trackpad ribbon cables connect the upper case to the motherboard, with plenty of slack to flip the upper case over and safely disconnect the ZIF connectors from the motherboard.
- The trackpad, a common failure point in laptops, practically flies out, ready for transfer to another class.

Step 4




- Having popped the top off, we get a look at the entire interior. Look at all this modular hardware!
 - The large interconnect cable even has friendly labeled ends: the side labeled *IO* connects to the *Input/Output* board, while the side labeled *MB* connects to [Manitoba, Canada](#). Or maybe the motherboard...
 - The I/O board also hosts the power jack, a common point of failure. It looks like fixing a broken power jack will be as easy as replacing this little board. A+
- ⚠ Upon removing a hefty bracket, we're a bit surprised to find it's actually a heat sink. Shunting heat straight into the battery seems an odd design choice; [batteries don't like too much heat](#).
- 📌 That said, it's the same [passive cooling strategy employed by the massively popular Surface Pro 4](#).

Step 5

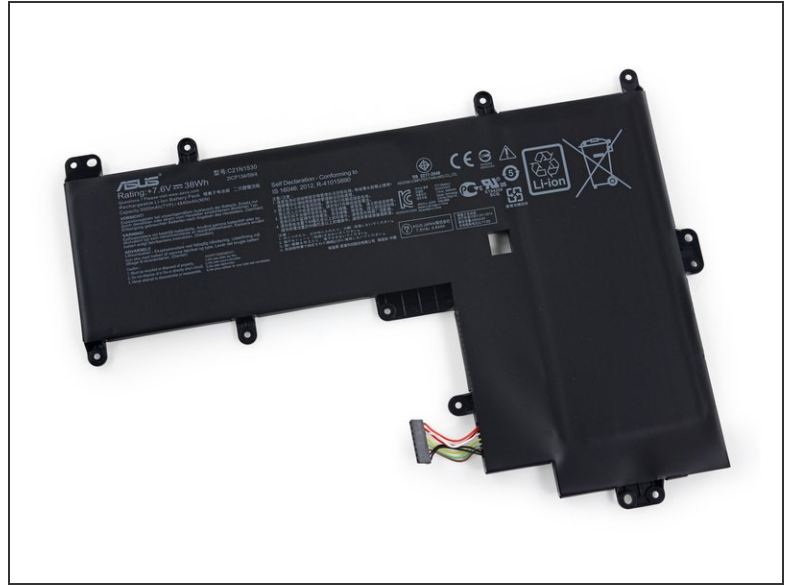


- Minor inconveniences suffered, we're able to remove the battery. Still nothing but Phillips #1 screws to slow us down. Nothing proprietary, and no adhesives.
- This is a 38 Wh lithium ion battery, on-par with the [11" MacBook Air](#)'s 38.75 Wh battery.
 - ⓘ Advertised battery life is also on-par, at 10 hours. We can't help but expect the C202 to do a little better, with its significantly less power-hungry components.
- Either way, aspiring [blasters](#) of math and [Oregon](#) pioneers should have plenty of time to hone their craft.

Step 6

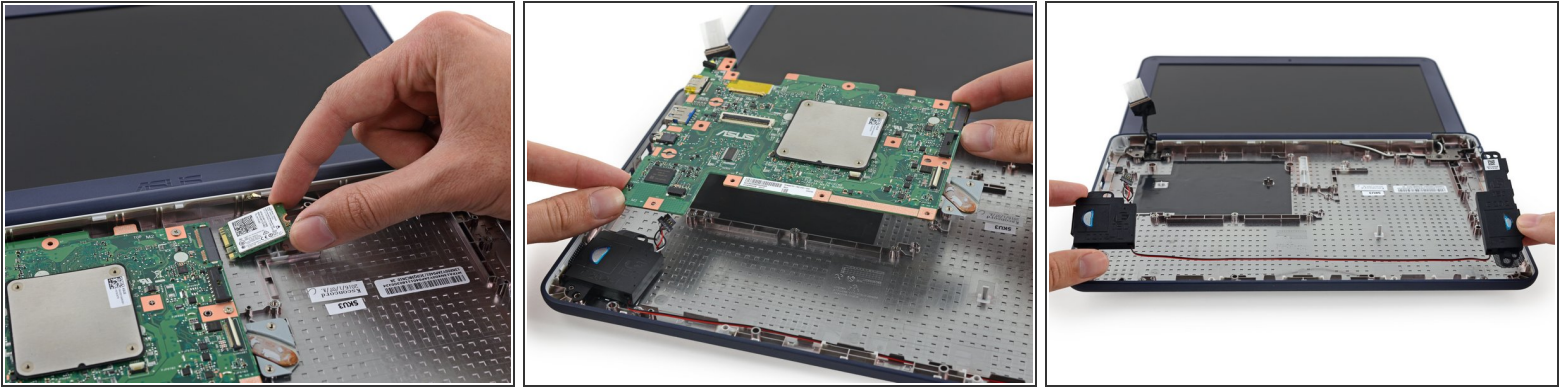

- While the C202 is very modular, its disassembly is also quite linear. We had to remove the I/O board cable, heat sink, and battery, in that order, to get to the motherboard.
 - ❗ Not that we're complaining too much, as the lack of adhesive makes removing and replacing these prerequisite parts a cinch.
- A last sweep before we leave the lower case reveals the speakers—a connected pair, free once the motherboard is removed.

Step 7

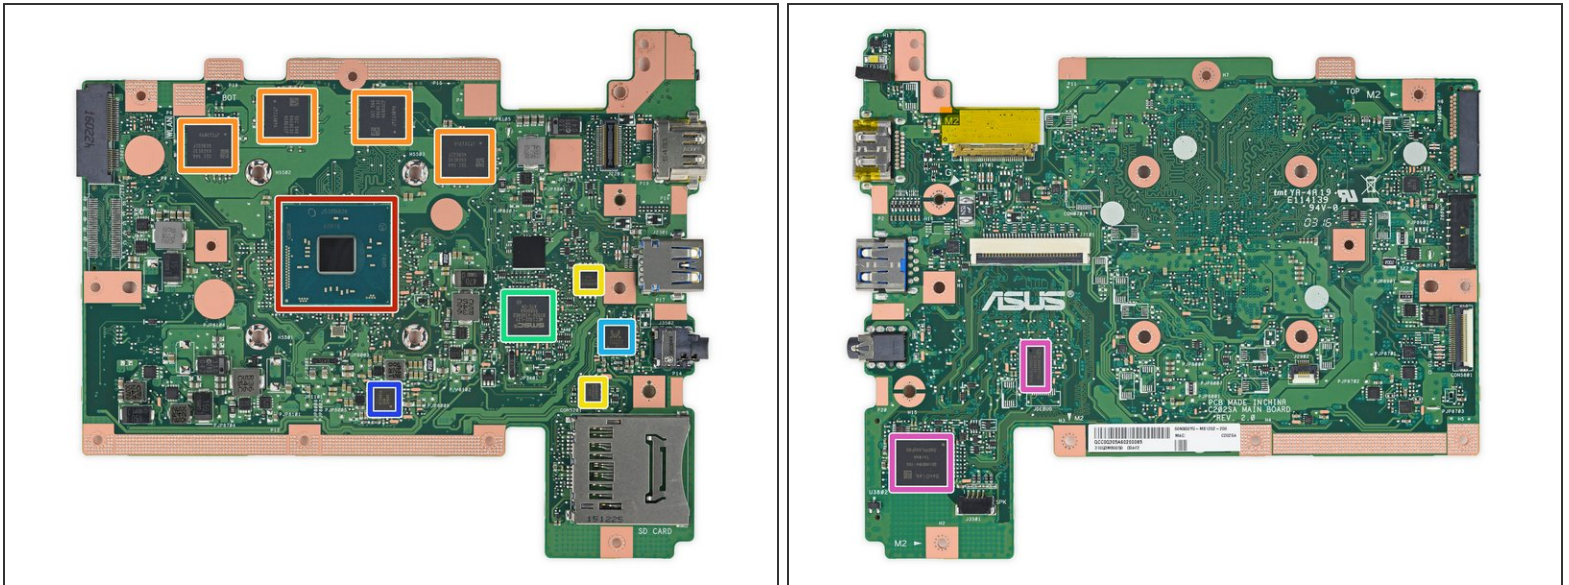

- Don't tell the other kids, but Asus brought chips. Silicon chips, that is:
 - Intel Celeron [N3060](#) 14 nm Braswell processor, with Intel HD Graphics 400
 - Samsung SEC 546 K4E8E32—likely [LP-DDR3](#) (four 8-Gb chips for a total of 4 GB RAM)
 - Winbond [W25Q64FWSIG](#) and [W25X40CLNIG](#) serial flash memory
 - SMSC/Microchip [MEC1322-LZY](#) ARM Cortex M4-based keyboard and embedded controller
 - Realtek ALC5650 (likely audio codec)
 - RT5067A GQW 2H60X
 - And on the reverse side: SanDisk [SDIN9DW4](#) 16 GB eMMC NAND flash, and Infineon SLB9655TT1.2 Trusted Platform Module

Step 8



- Last stop on the hit parade—the display. *Don't lose your head, C202, or we'll have to send you to the principal's office.*
- Here we encounter some more of that linear construction—we had to remove the motherboard and I/O board to get the display out.
- Opening up the display itself is a trivial matter. A couple more Phillips #1 screws behind stuck-on covers and a quick pry reveals the LCD, camera, microphone, antennas and hinges, ready to be plucked out and replaced.

Step 9



- Pencils down, please pass your exams forward. Asus Chromebook C202 Repairability Score: **9 out of 10** (10 is easiest to repair).
 - Intuitive, uncomplicated design makes disassembly straightforward and reversible.
 - Modular components means many repairs can be carried out by quickly swapping a failed part.
 - Only Phillips #1 and #00 screws are used.
 - No adhesives are used, and all plastic clips are durable enough to easily survive reassembly.
 - Linear disassembly means you might have to remove several components to get to what needs replacing. That said, failure prone parts (battery and ports) are prioritized.
 - RAM and flash storage are soldered to the motherboard and cannot be replaced or upgraded. However, this may not be much of an issue for the C202's target market.
- ① Even easy repairs can be difficult without instructions—but thankfully, Asus has published its official [disassembly guide](#) on iFixit.