



# Asus Memo Pad ME172V - Touch Screen Replacement

Asus Memo Pad ME172V - Touch Screen Replacement

Written By: ZFix



# INTRODUCTION

How to replace broken or not working touchscreen.

**WARNING!** Work carefully and start only if you are confident you can do it!

**Please SUBSCRIBE to my channel** ↴

[video: <http://youtu.be/vdQdcnEF50k>]


## **TOOLS:**

- [iFixit Opening Tools](#) (1)
- [Heat Gun](#) (1)

## **PARTS:**


- [Adhesive tape 3M core 5mm](#) (1)
- [touch](#) (1)

## Step 1 — Touch Screen replacement

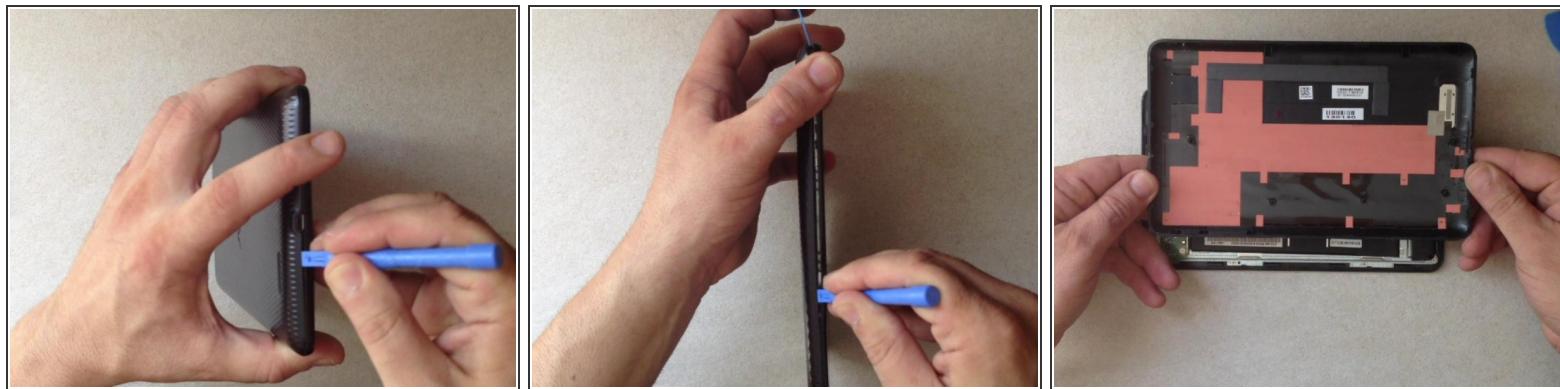

- Switch-off the tablet.
- By using a plastic tool open the back / battery cover.

## Step 2

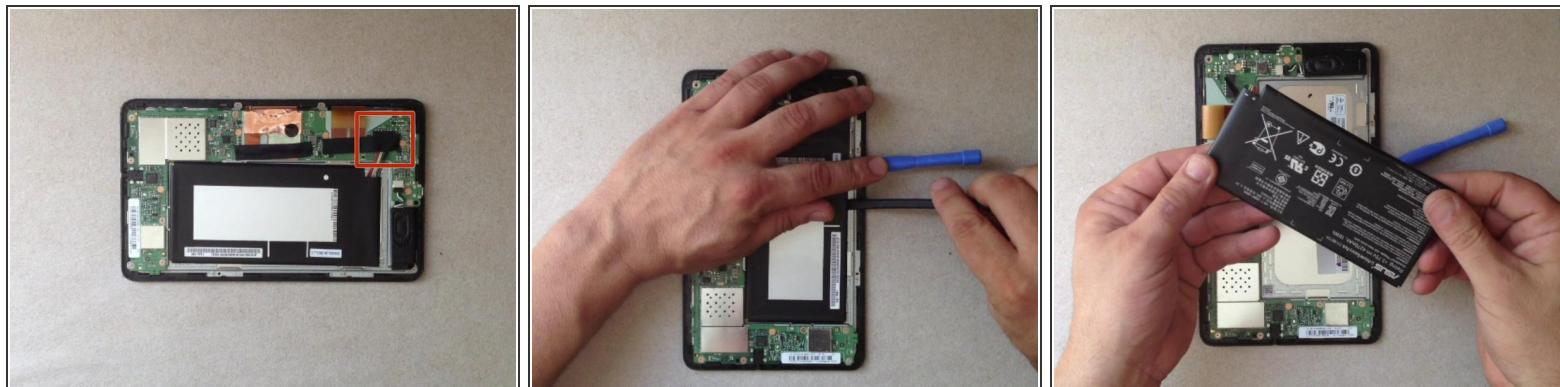


- Disconnect and remove the battery.

## Step 3




- Disconnect the LCD display flex cable.
- Disconnect the touchscreen flex cable.
- Disconnect and remove the loudspeaker.
- Unscrew 10x screws.
- Now you can remove the mother board

## Step 4

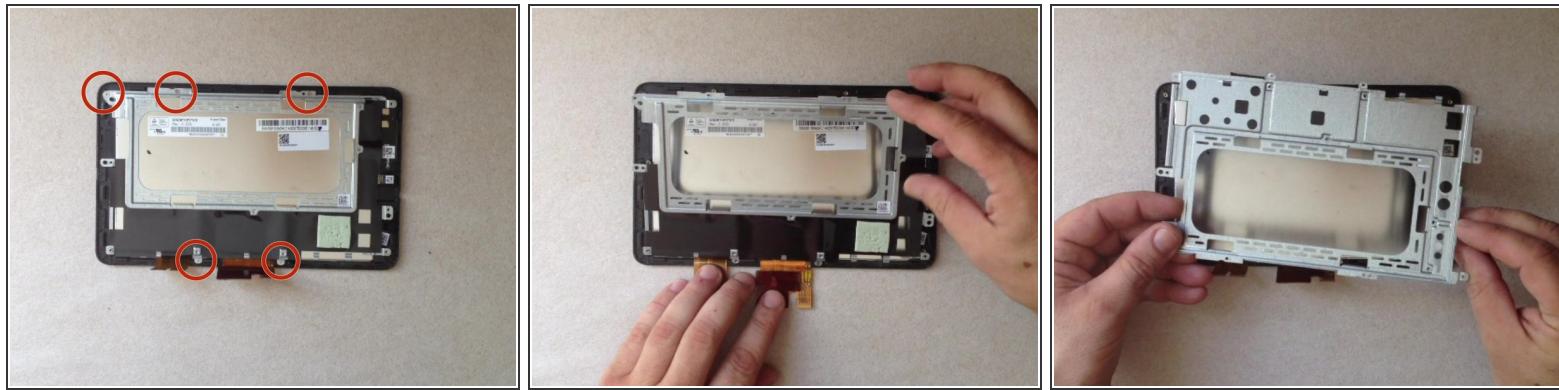

- Remove the metal LCD display shield.

## Step 5 — Separate the LCD panel from the digitizer

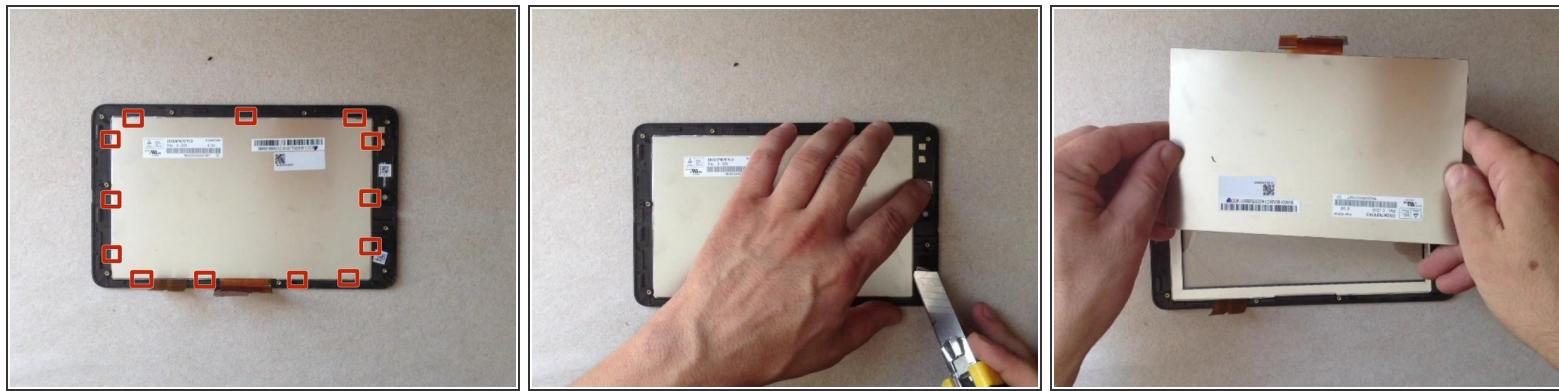


- There are many clips holding the LCD panel to the metal frame.
- Use a spudger to loosen the clips holding the LCD display.

## Step 6



- Heat the touch screen.
- Use a cutter only to start detachment the touchscreen. Then continue with a plastic tool.

## Step 7

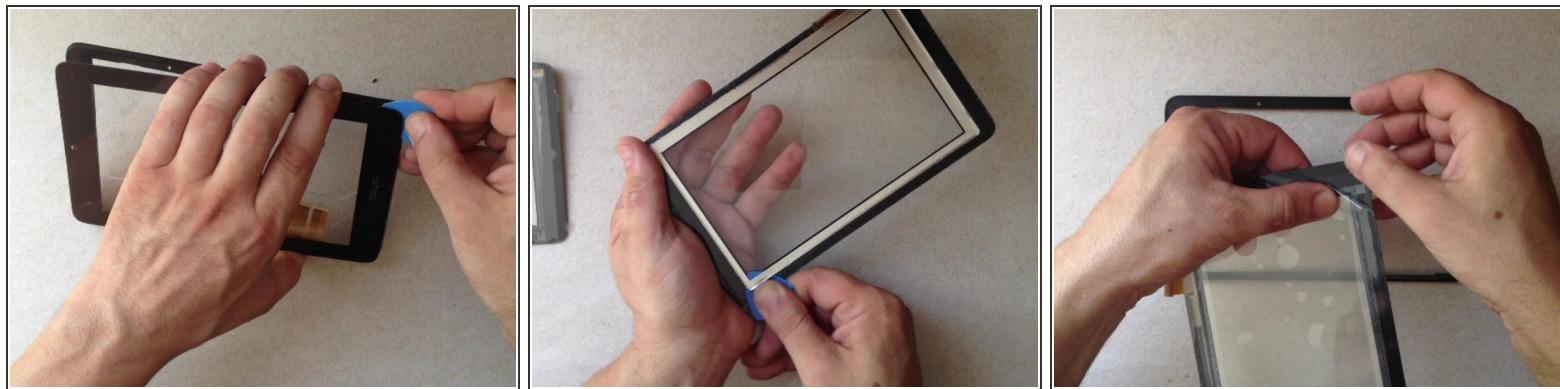

- After separation the touchscreen from the front bezel, remove the LCD display frame.
- This spare part have a double sided adhesive tape. Otherwise you should place.
- .
- **Did you do it successfully?**
- .

 [Please SUBSCRIBE to my channel](#) ツ

To reassemble your device, follow these instructions in reverse order.