




Asus Q325U CPU Fan Replacement

How to remove and replace the CPU Fan in the Asus Q325U.

Written By: Matthew Slawson

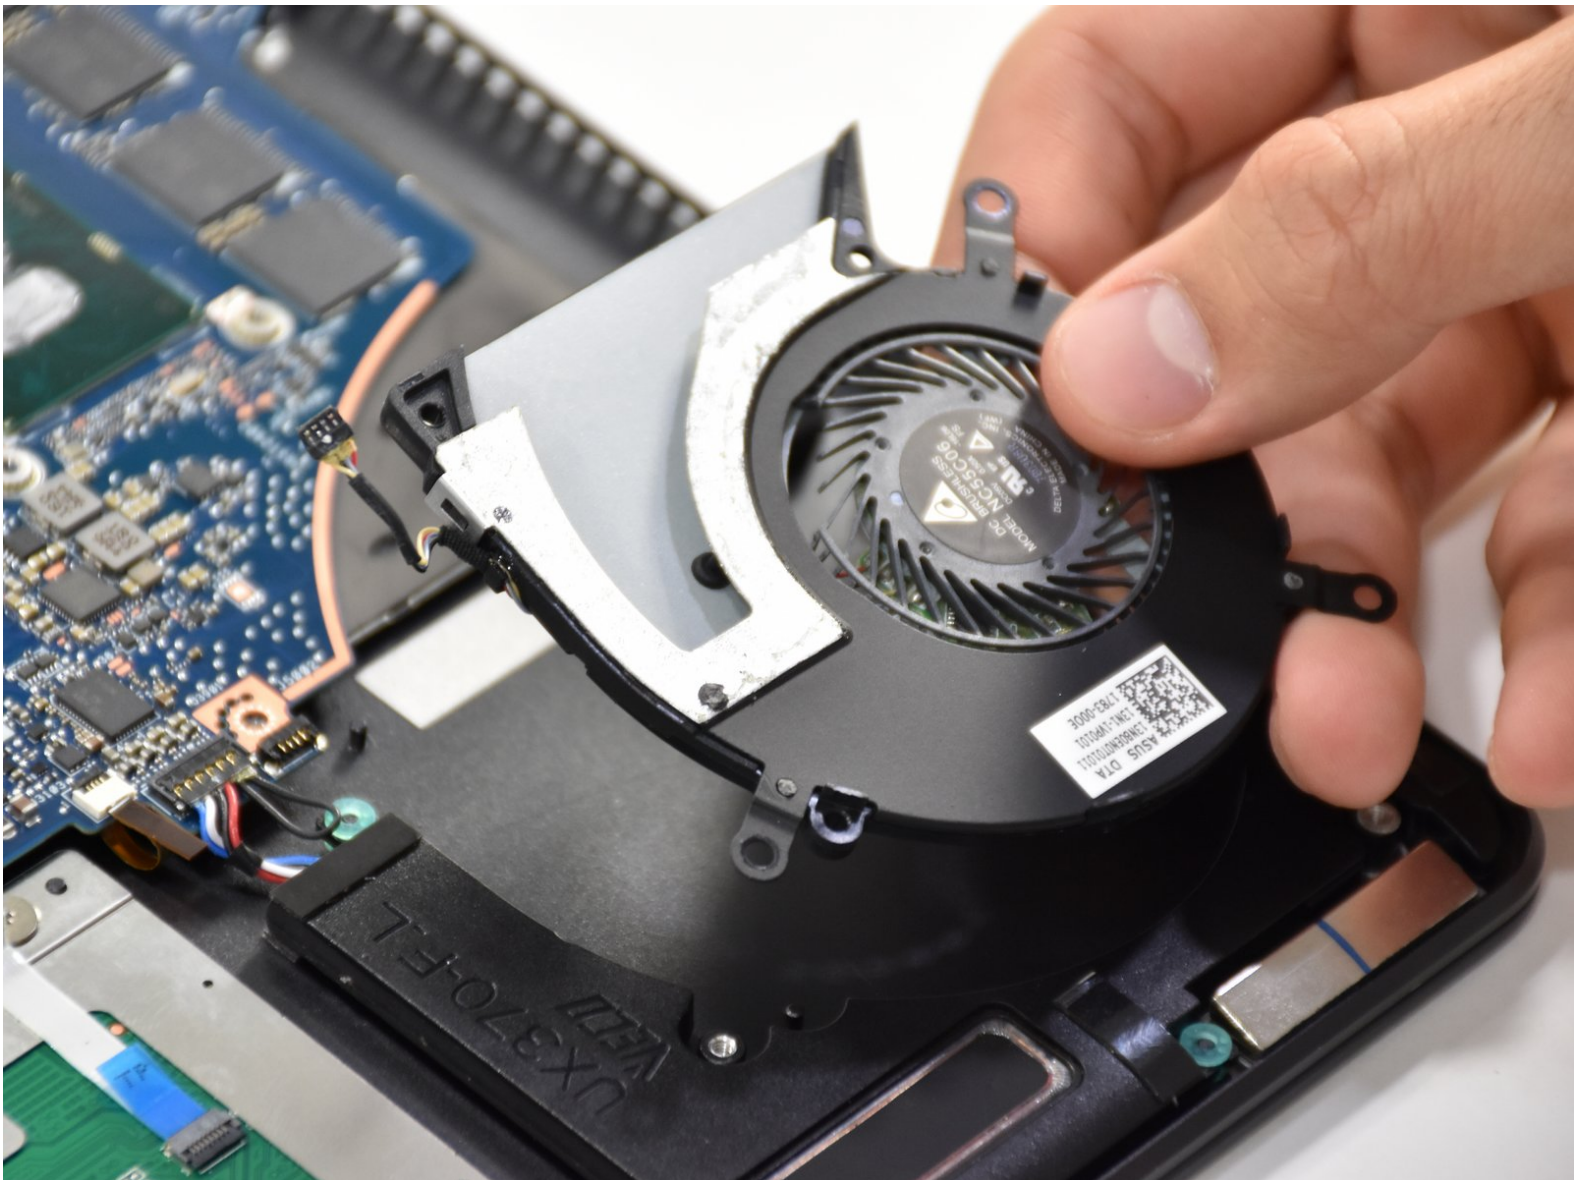

INTRODUCTION

This guide will demonstrate how to replace the CPU fan in your Asus Q325U.

TOOLS:

- [T5 Torx Screwdriver](#) (1)
 - [Suction Handle](#) (1)
 - [Phillips #00 Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
 - [ESD Safe Tweezers Blunt Nose](#) (1)
-

Step 1 — Back Panel




- Remove the ten 5mm screws using a T5 Torx screwdriver.

Step 2





- Lift the back panel upward using the suction tool.

Step 3 — Copper Plate

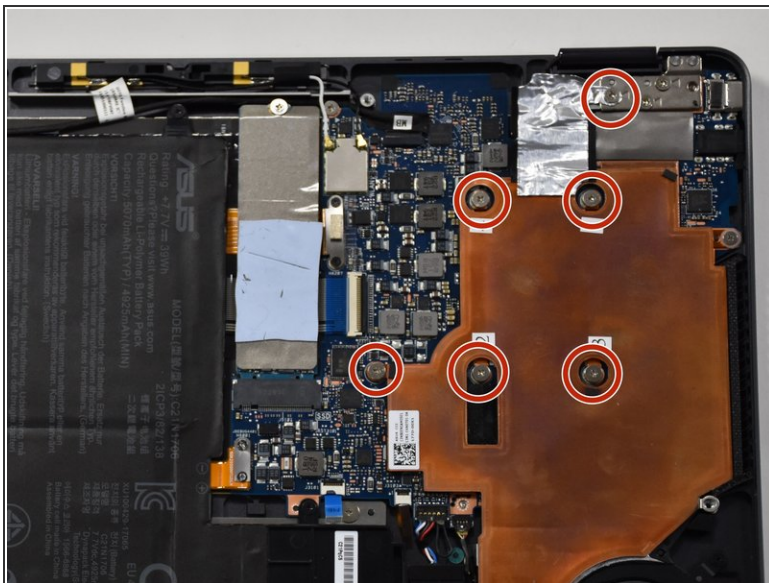



- Remove the six 3mm screws using a Phillips #00.

Step 4

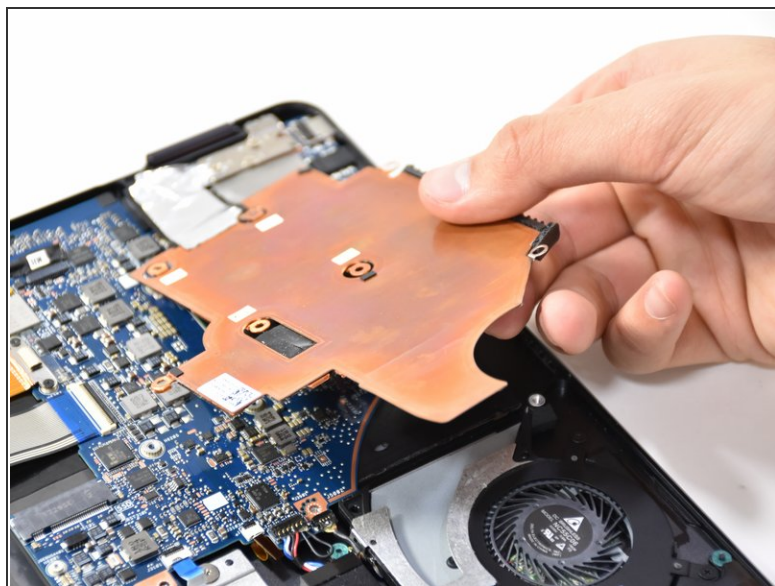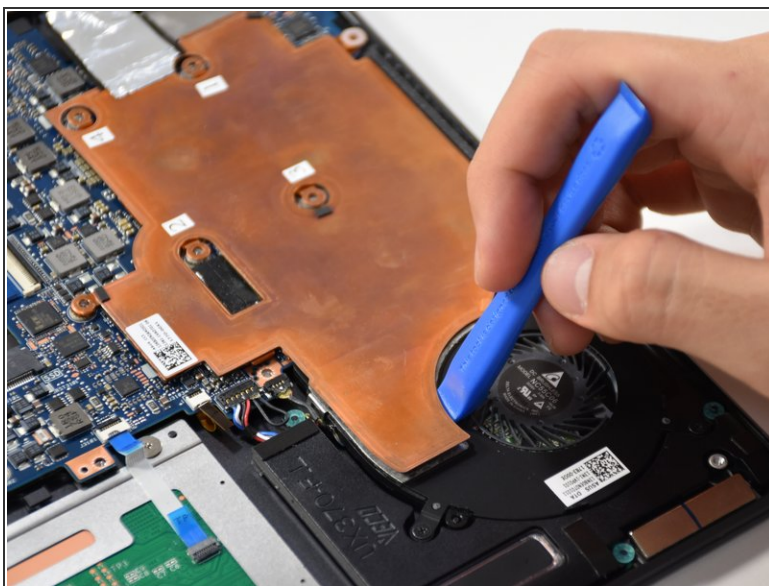

- Use the plastic opening tool to lift up the edge. Pull upward on the edge.

Step 5

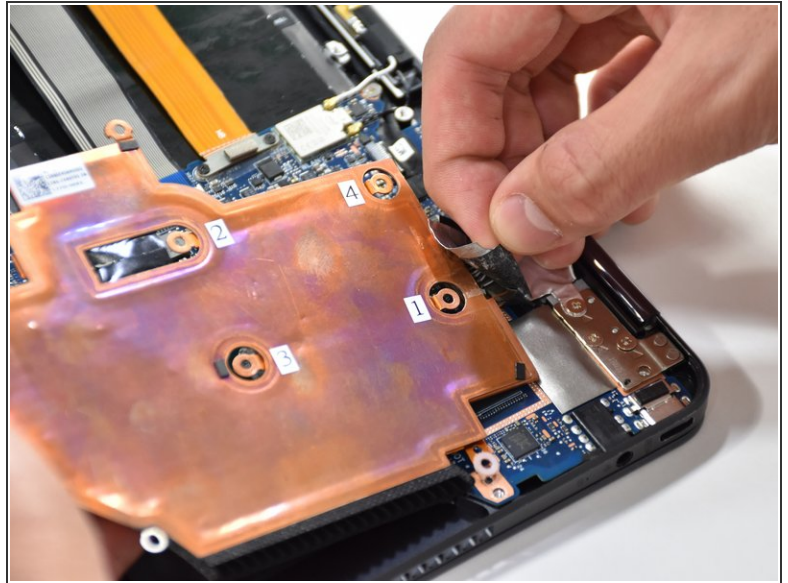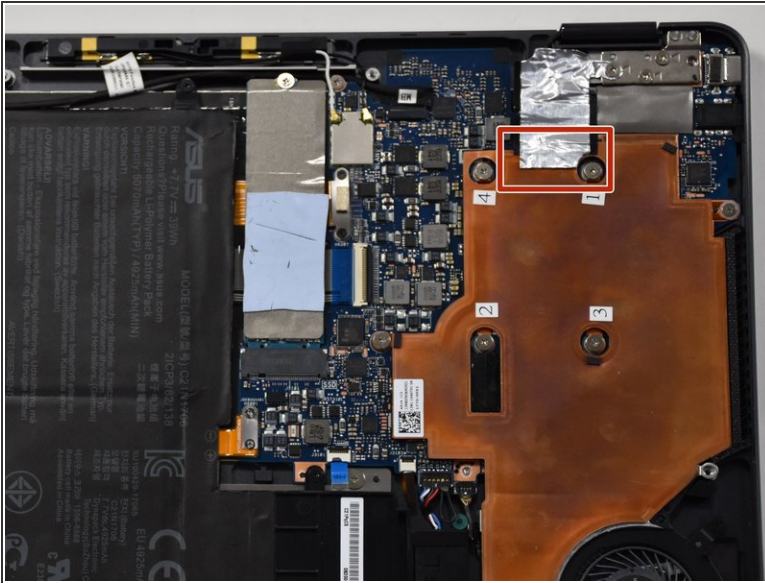


- On the other side of the plate, remove the tape.

Step 6 — CPU Fan




- Remove the three 3.7 mm screws using a Phillips #00 screwdriver.

Step 7

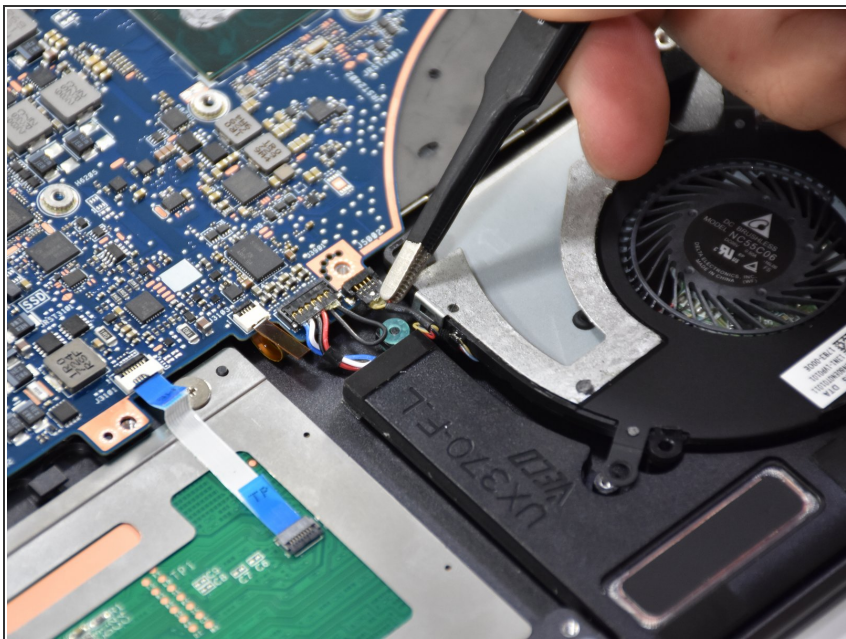

- Detach the black wire and plug shown using a tweezer.

Step 8

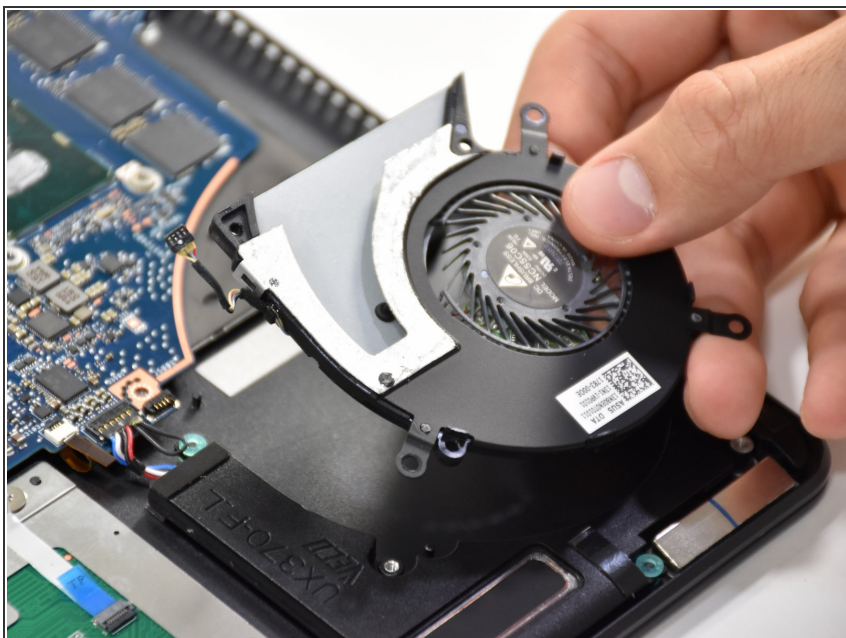

- Grab CPU fan by its edge and gently pull upwards to remove.

To reassemble your device, follow these instructions in reverse order.