




# Asus ROG Strix GL702VS Fan Replacement

How to remove the fans on the Asus ROG Strix GL702VS Gaming Computer.

Written By: Conor H Allen

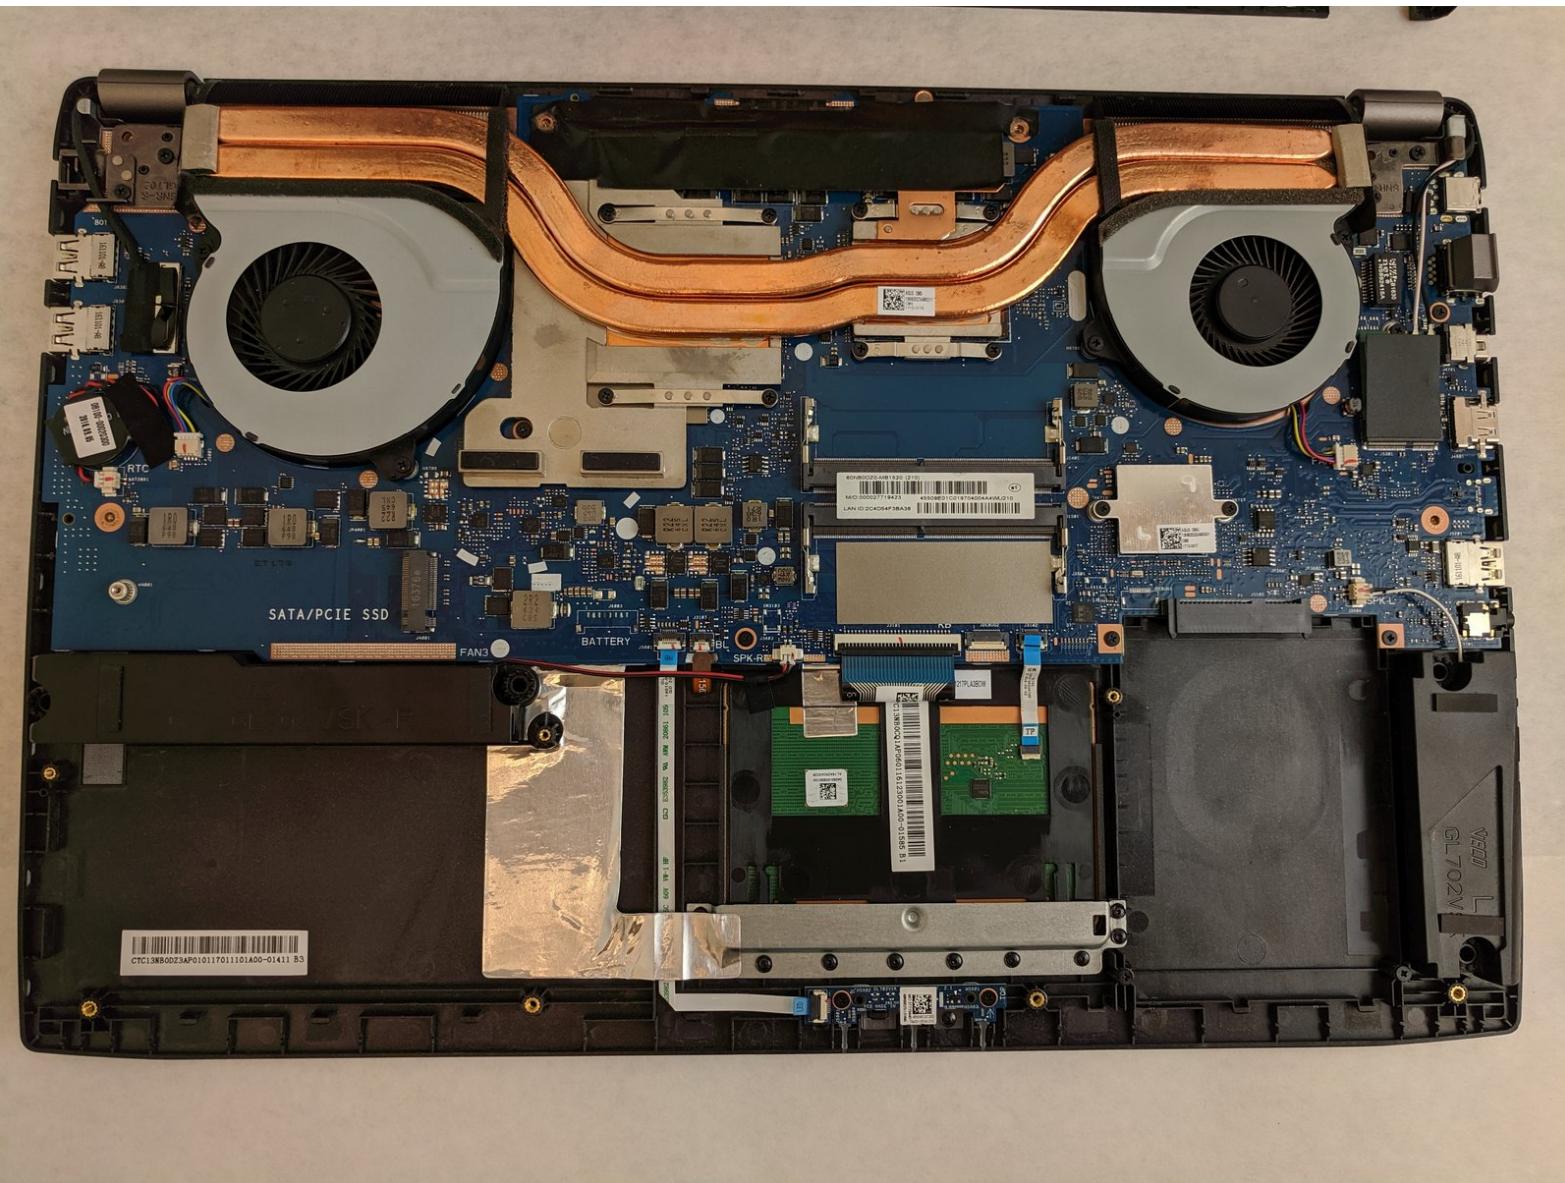

## INTRODUCTION

This is a step by step guide for the removal of the Asus ROG Strix GL702VS cooling fans for replacement or repair. If you are experiencing overheating problems or loud fan noises and grinding, follow these steps to remove the fans for replacement, repair, or cleaning.

### TOOLS:


- [Jimmy](#) (1)
- [JIS #0 Screwdriver](#) (1)
- [Tweezers](#) (1)

## Step 1 — Back Cover



- Flip the computer so the bottom of the laptop is facing up.

## Step 2

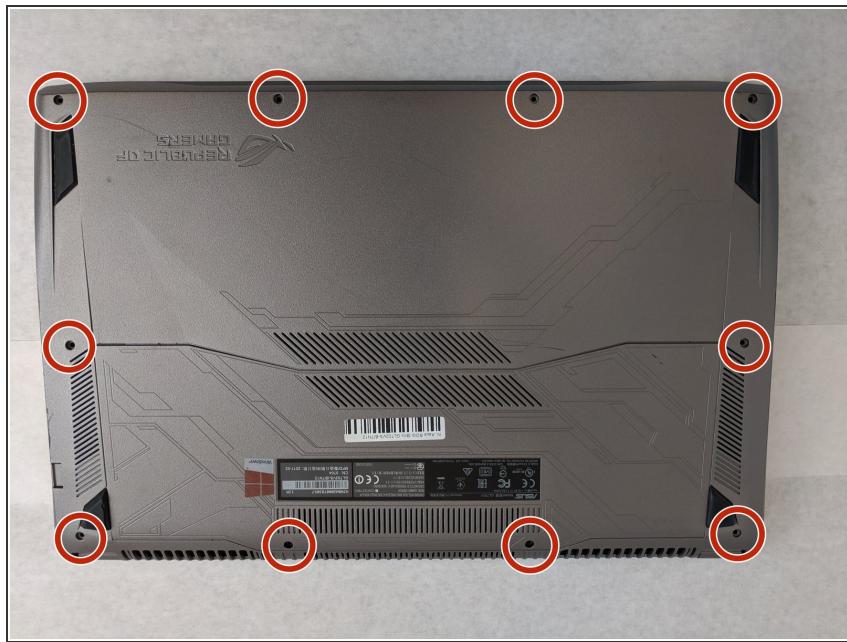

- Remove the ten JIS #0 screws around the edge of the laptop.

## Step 3



- Use a Jimmy to carefully free each side of the bottom casing.


## Step 4



- Lift up the back casing from the computer.


*(i)* You may hear clicking or snapping sounds. This is just the plastic clips coming loose.

## Step 5 — Cooling Fans

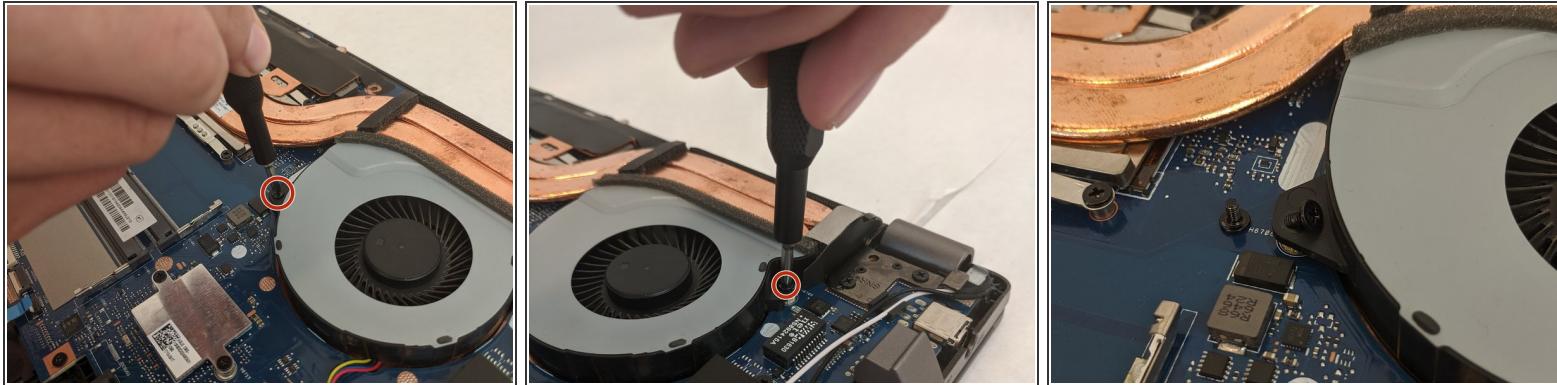



- Remove the four 4.8mm JIS #0 screws (two on each fan).

## Step 6

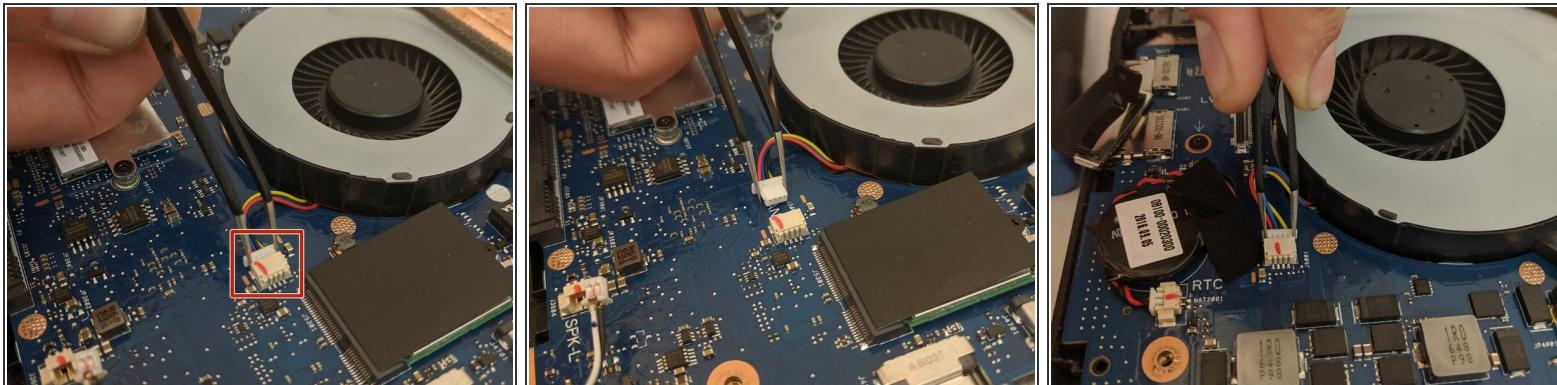

- Remove the fan's connector on the motherboard using a pair of tweezers.
- Be gentle, as the small clips and wires can be easily damaged.

## Step 7

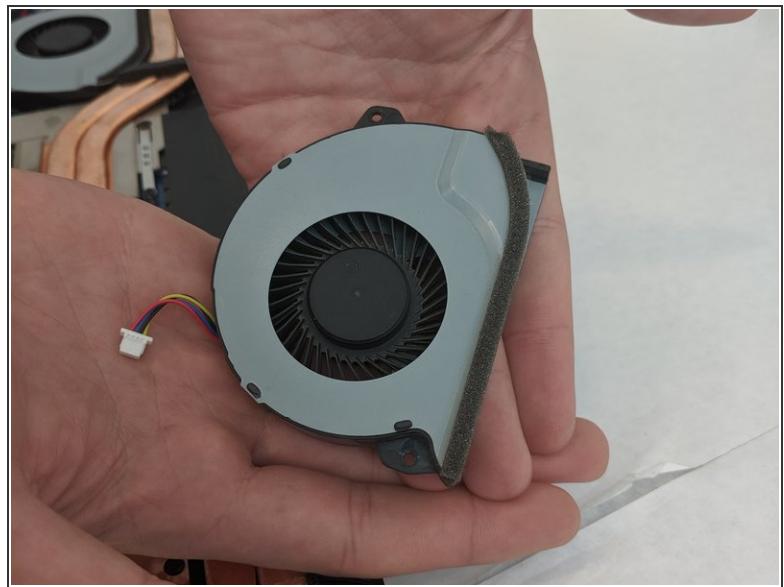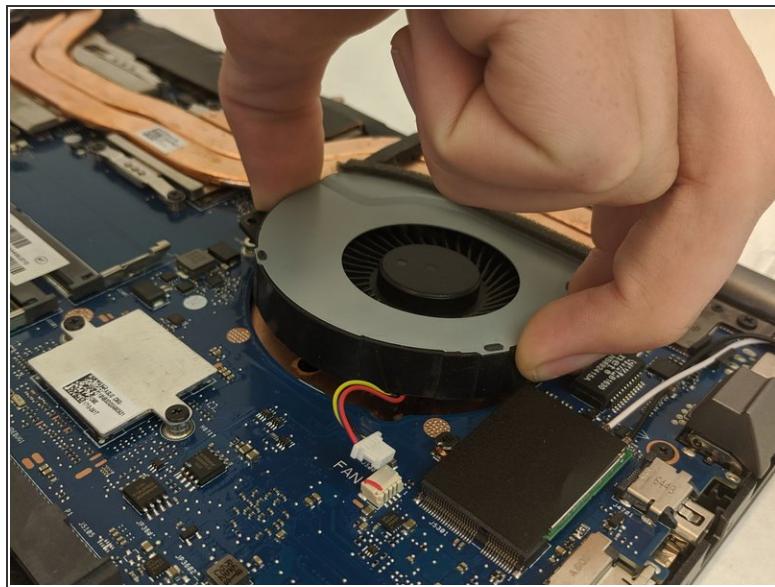

- Gently lift each fan up and out of position.

To reassemble your device, follow these instructions in reverse order.