



# Asus Transformer Book T100TAM-C1 USB Input Replacement

This guide will show you how to replace the USB Input on an Asus Transformer Book T100TAM-C1.

Written By: Brody Moore



## INTRODUCTION

This guide will show you how to replace a faulty USB input by taking apart the keyboard.

### TOOLS:

- [iFixit Opening Tools](#) (1)
- [Magnetic Project Mat](#) (1)
- [Soldering Iron](#) (1)
- [iFixit Opening Picks set of 6](#) (1)
- [Phillips #0 Screwdriver](#) (1)

## Step 1 — USB Input




- Remove the tablet portion of the device from the keyboard by pushing on the silver button located at the base of the tablet and lifting up on the tablet.

## Step 2



- Use the plastic opening tool to remove both of the top corner pads.

## Step 3

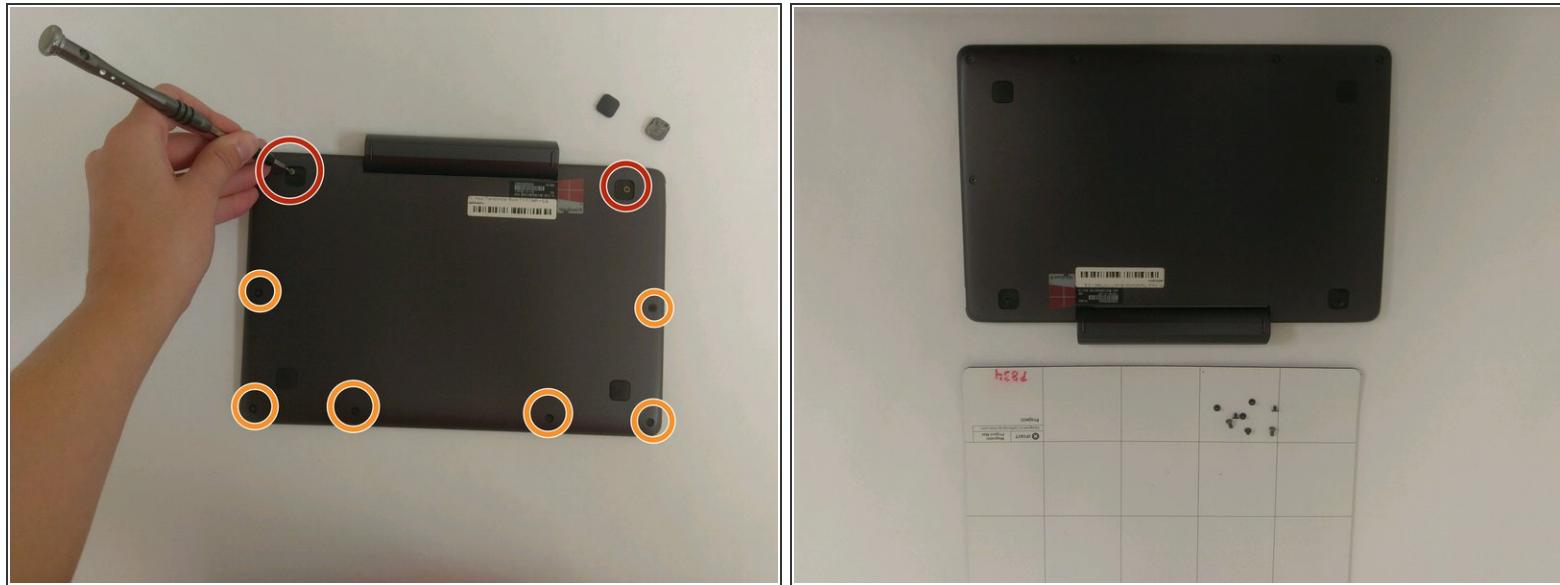


- Remove two 5mm Phillips #0 screws on the top corners.
- Remove four 2.5mm Phillips #0 screws on the top corners.

## Step 4




- Use the pick and pry apart the keyboard.

## Step 5

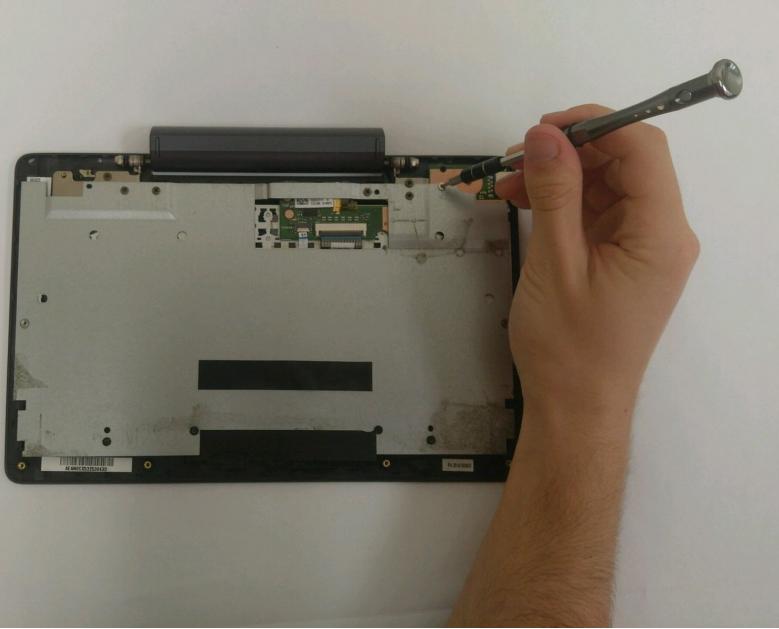


- Use the size 0 Phillips screwdriver and remove the nine screws from the back panel. The four you need to remove across the top are 3mm and the four across the bottom are 2.5mm.
- The screw in the top right, shown where the screwdriver is, is a 5mm screw.

## Step 6

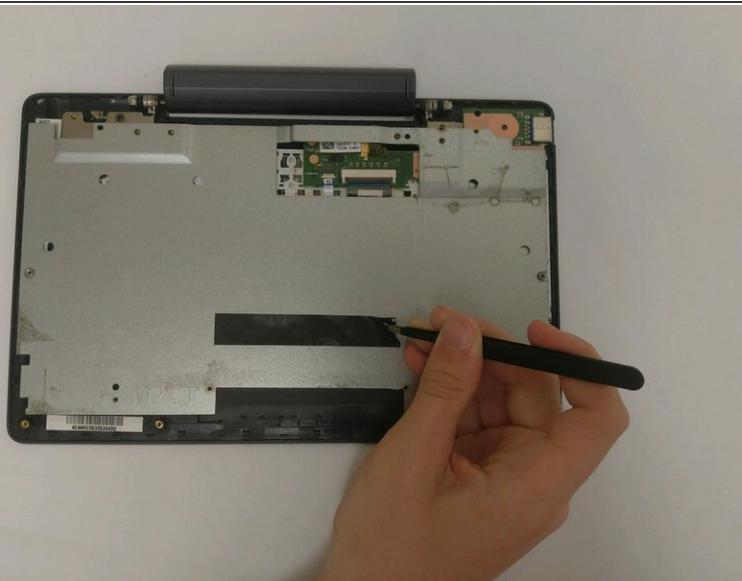

- Use tweezers and remove the black tape from the back panel.

## Step 7

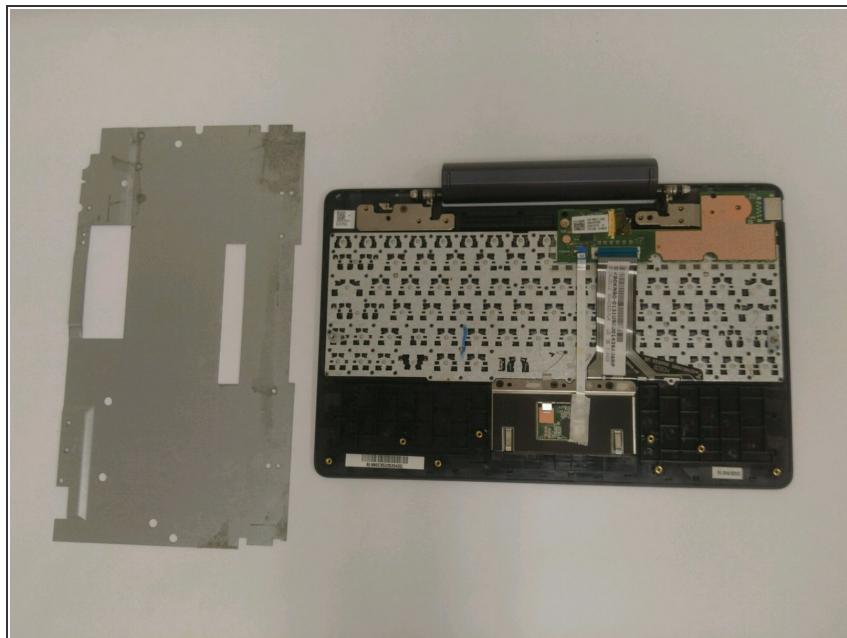


- Remove the metal back panel from the keyboard.

## Step 8



- Flip the connectors back to release the wires
- Take the white tab and gently pull it to the right in order to release the connecting piece.

## Step 9

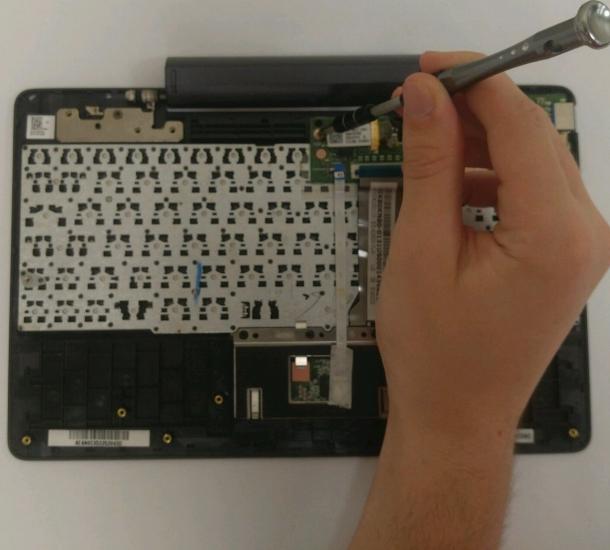

- Remove the screw from the green plate.
- Once all of the screws are out, remove the plate.

## Step 10



- Place soldering tool on each of the four connecting pieces in the corner until each becomes unattached.
- Remove old USB input and replace with the new one.

To reassemble your device, follow these instructions in reverse order.