




Asus VivoBook Q302LA-BHI3T09 Display Replacement

This guide shows how to replace the 2-in-1 touchscreen display of the Asus VivoBook Q302LA-BHI3T09.

Written By: Deric Wright

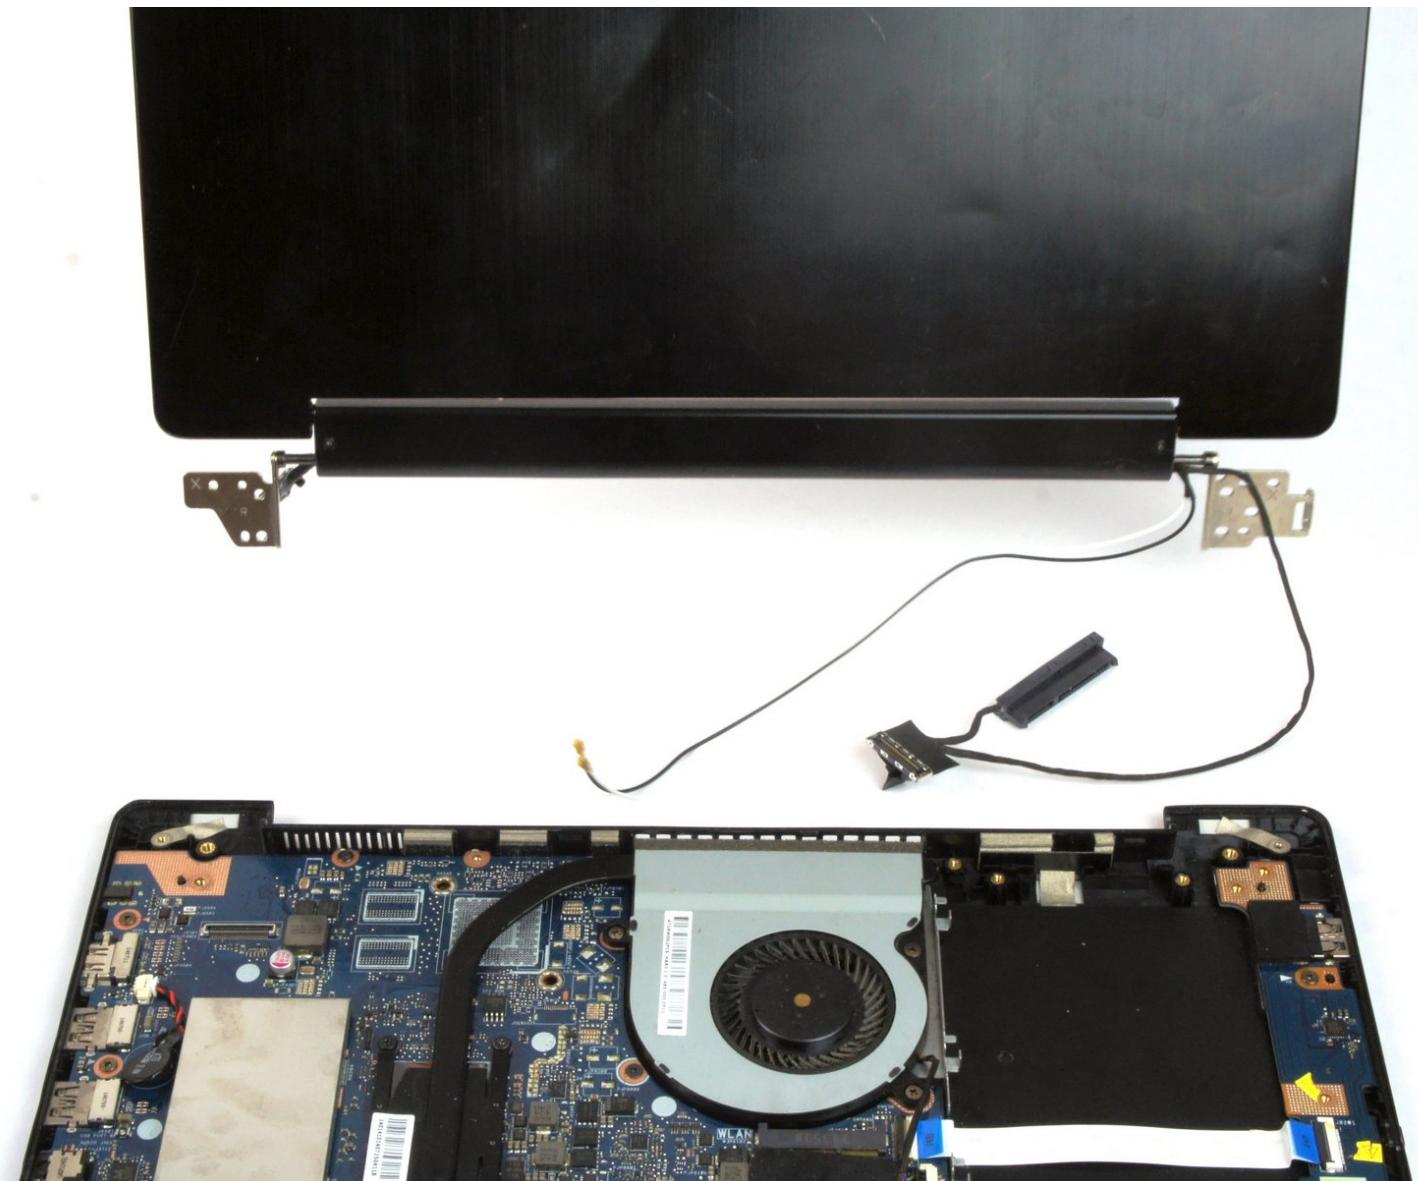

This document was generated on 2019-09-18 09:53:56 PM (MST).

INTRODUCTION

The 2-in-1 touchscreen display can become unresponsive or cracked due to it being used often. If the display gets damaged or becomes unresponsive, and you determine it is not a power issue, the guide shows how to replace the entire display.

TOOLS:

- [iFixit Opening Tools](#) (1)
- [JIS #0 Screwdriver](#) (1)

Step 1 — Display



- ⓘ Before doing a repair or replacement make sure the laptop is fully shut off.
- Using the JIS #0 Screwdriver, unscrew the ten 10 mm screws that hold the back casing in place

Step 2



- Insert the flat edge of the opening tool in between the back casing to remove the back casing.

⚠ Try to use the opening tool at multiple points. Lifting the back casing abruptly could damage the laptop.

Step 3



- Using the JIS #0 Screwdriver, remove the five 3.0 mm screws that hold down the hard drive casing.

This document was generated on 2019-09-18 09:53:56 PM (MST).


Step 4



- Lift the hard drive up and remove the power supply cable connected to it.


 Make sure to pull on the plastic head and not the actual wires to prevent tearing them.

Step 5

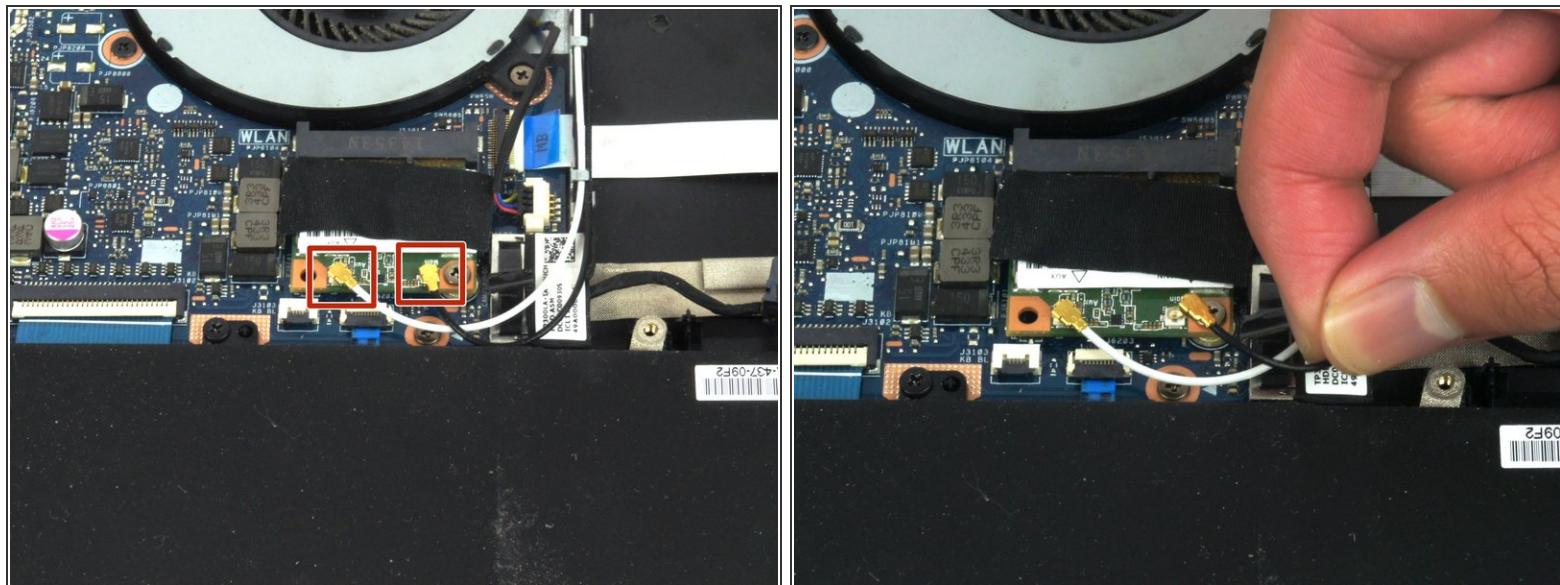


- Disconnect the white and black wires attached to the Wi-Fi chip.

Step 6

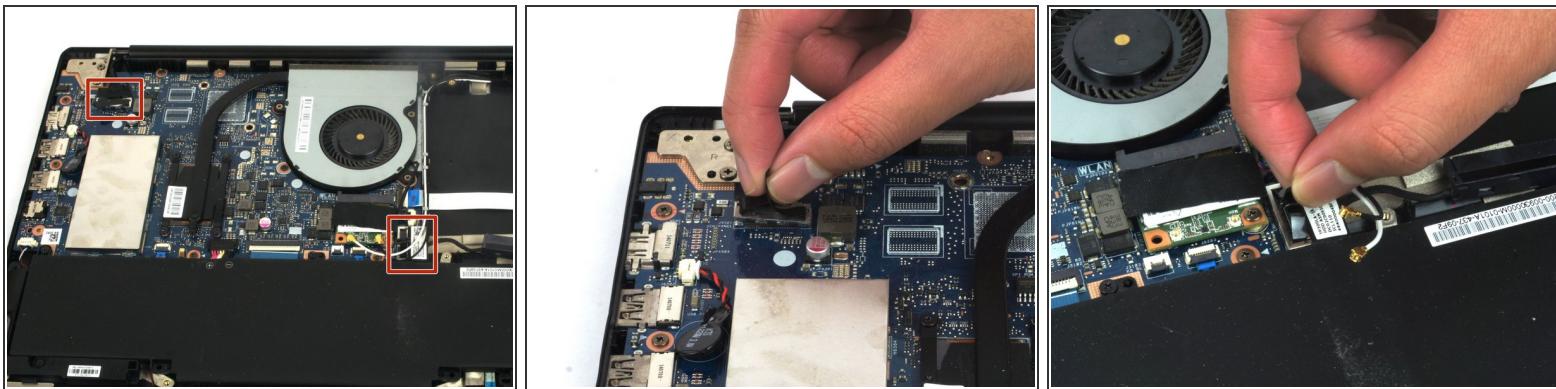

- Remove the two adapters connecting the display to the motherboard by pulling the black plastic straps directly upwards.

Step 7

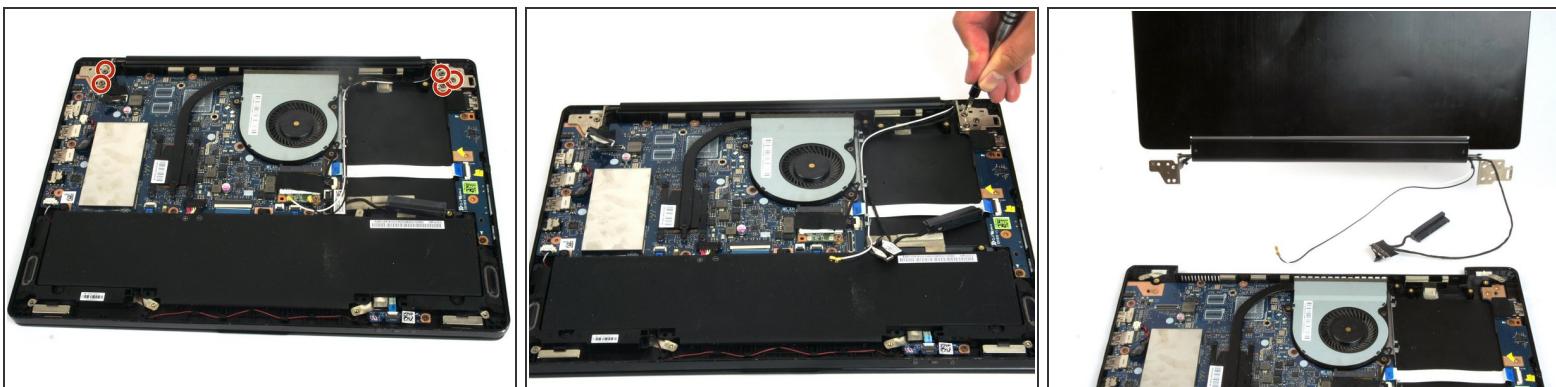

- Use the JIS #0 screwdriver to remove the five 5.0 mm screws connecting the display to the rest of the laptop.

To reassemble your device, follow these instructions in reverse order.