


SERVICE
2702D TELEPHONE SETS

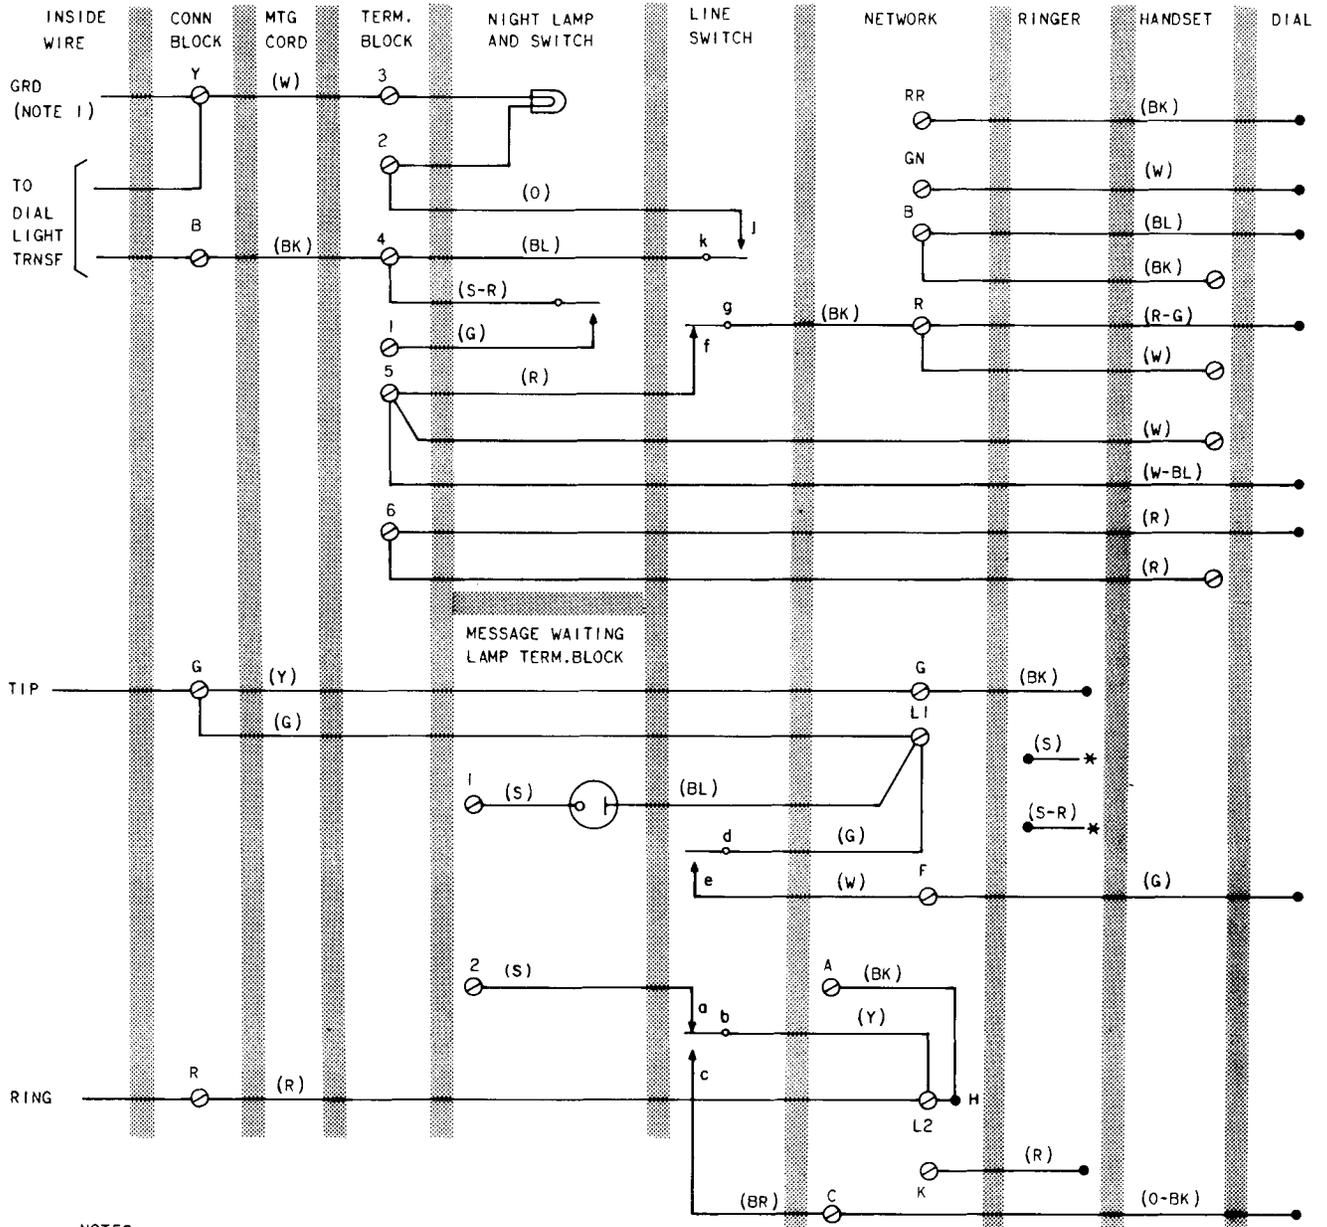

NOTES:

1. GROUND MAY BE OMITTED IF NOT REQUIRED FOR SERVICE; NOT NECESSARY FOR DIAL LIGHT TRANSFORMER PROTECTION.
2. TO PERMANENTLY SILENCE RINGER, DISCONNECT (R) RINGER LEAD AT K OF NETWORK. INSULATE AND STORE LEAD.
3. SET WIRED FOR BRIDGED RINGING.

- * INSULATED AND STORED
- () CURRENT COLOR CODE
- [] MD COLOR CODE

Fig. 1—2702D Telephone Set, Connections

TABLE A
POLARITY GUARD CONNECTIONS
(D-180229 Kit of Parts)

| WIRE OR LEAD | COLOR | REMOVE FROM | CONNECT TO | |
|-------------------------------|-------|-------------|------------|--------------|
| | | NET. | NET. | TERM. BLOCK* |
| Line Switch | (BR) | C | | 4 |
| Dial | (BK) | RR | | 3 |
| D-180229 Polarity Guard | (R) | | | 3 |
| | (BK) | | | 4 |
| | (G) | | RR | |
| | (W) | | C | |

* Component of message waiting lamp assembly located between dial mounting brackets. Use screws from terminal board in D-180229 Kit of Parts.

Note: Terminal board and retainer furnished with D-180229 Kit of Parts are not used on sets equipped with message waiting feature. Install polarity guard only when specified by local instructions for end-to-end signaling.