




# Asus X751MA-DH01TQ Fan Replacement

This guide will help with replacing a Asus X751MA-DH01TQ fan.

Written By: Darren Kim

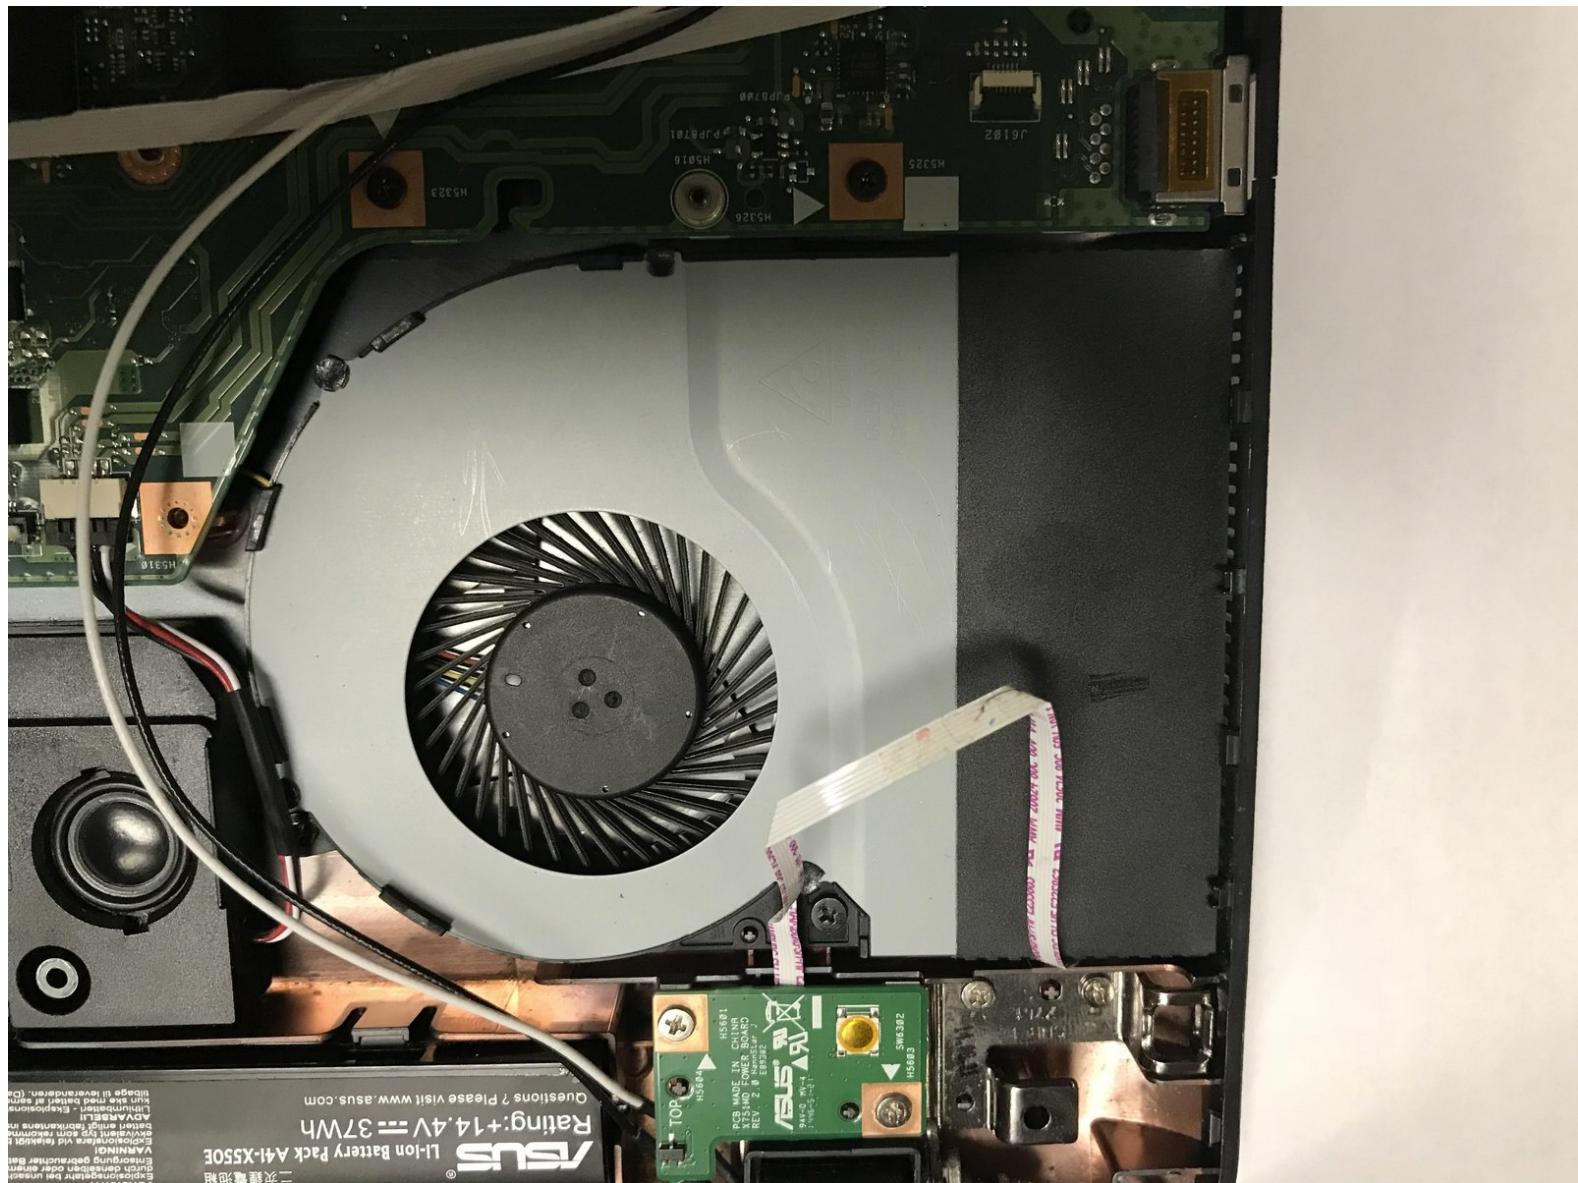


 **TOOLS:**

- [Phillips #00 Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)

 **PARTS:**


- [asus x751ma fan](#) (1)

## Step 1 — Fan

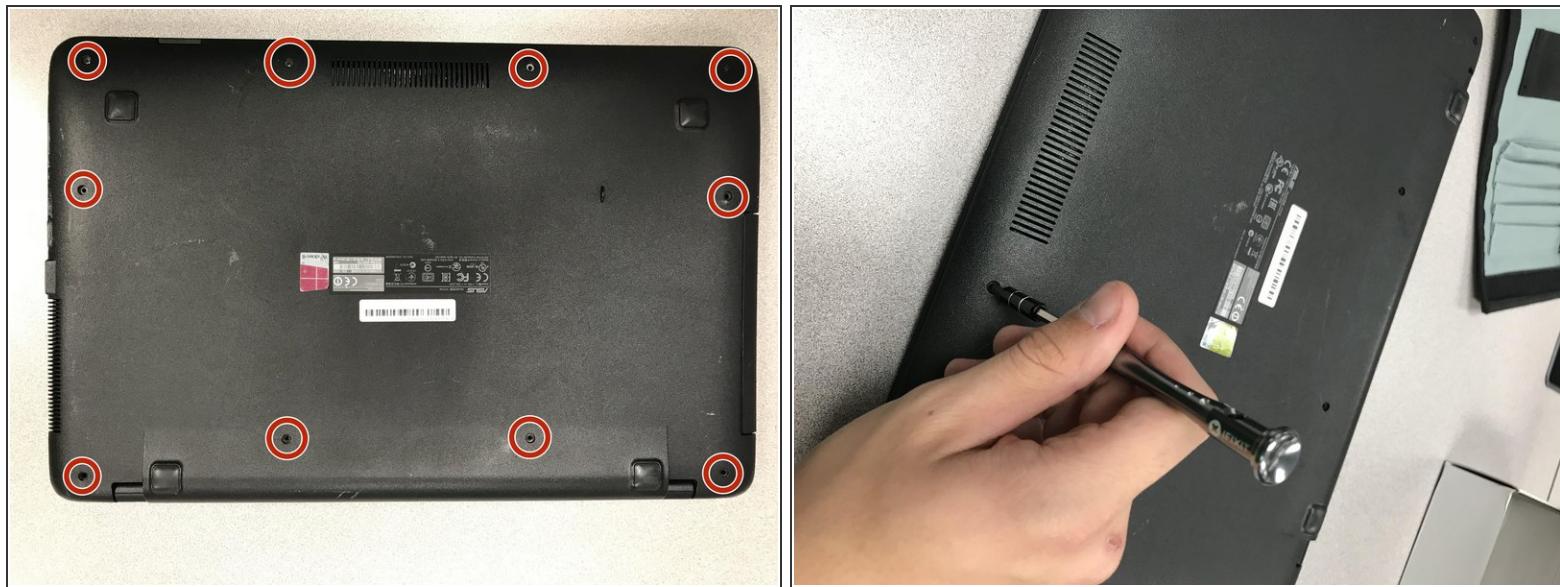



- Turn the laptop upside down.
- Remove all ten screws using a 00 Phillips head screwdriver.

## Step 2

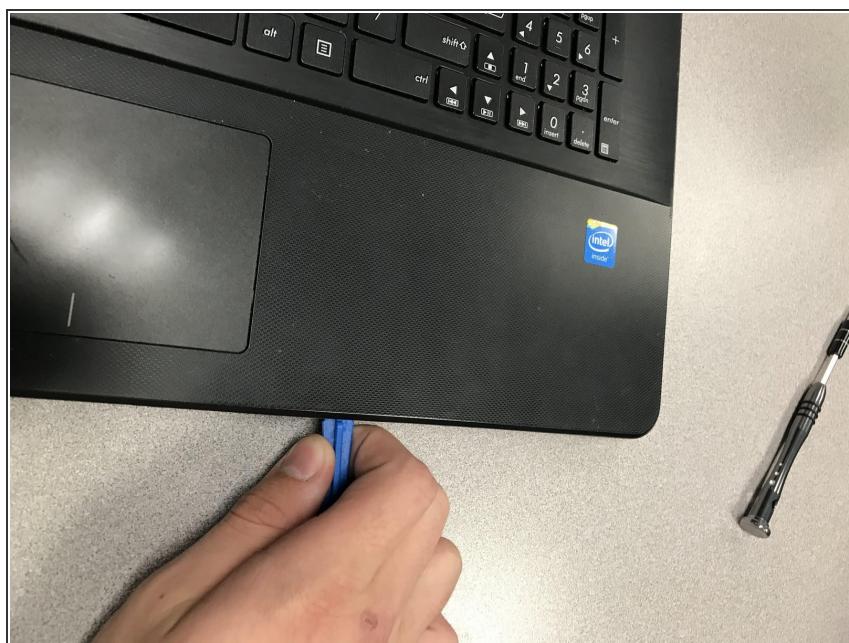



- Use a plastic opening tool to take the keyboard off of the base.
- Gently take off the keyboard from the base.

## Step 3

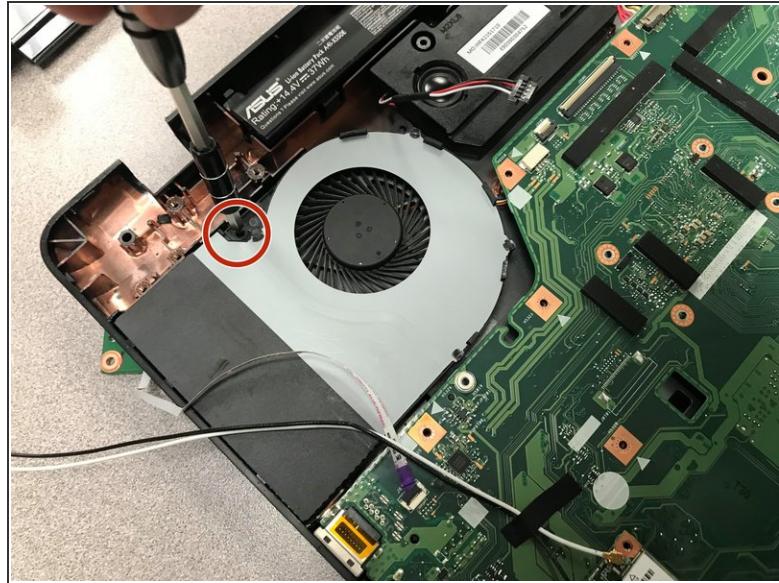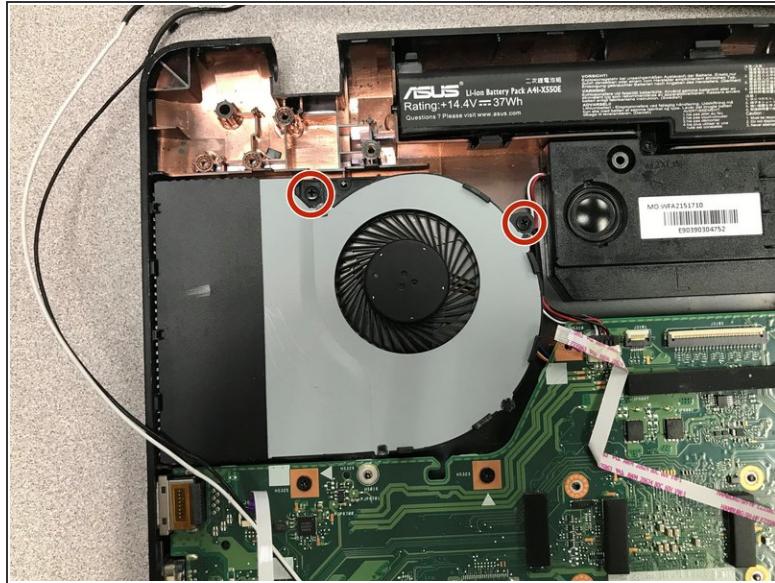


- Remove the two screws directly above the fan.

## Step 4

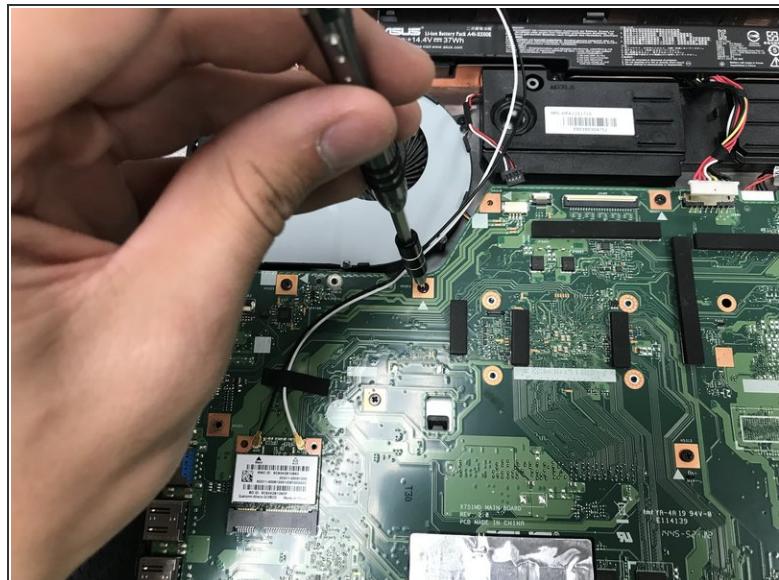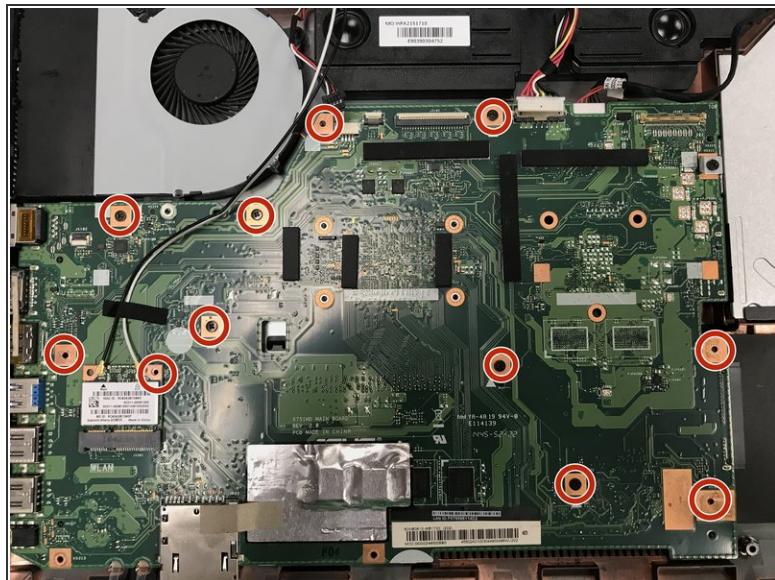


- Unscrew the 11 screws that hold the motherboard to the base of the computer with a 00 Phillips screwdriver.

## Step 5

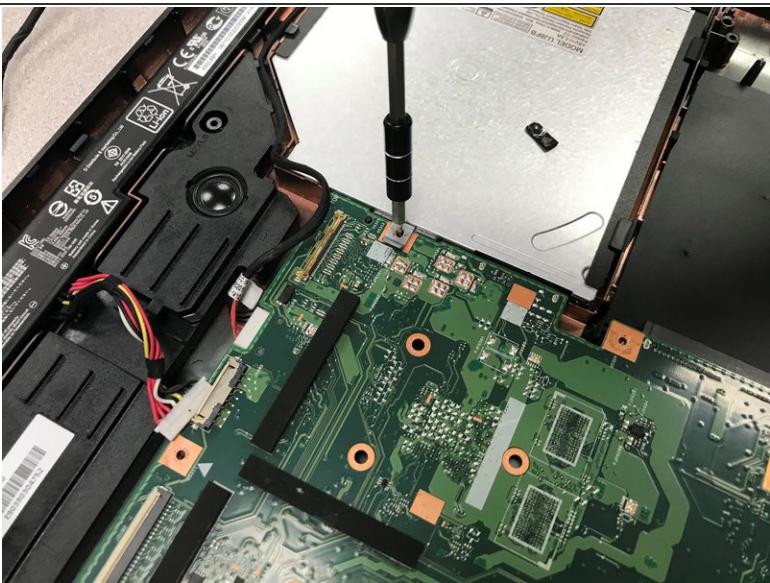


- Remove the one screw on the right side of the motherboard that keeps the cd tray in place.

## Step 6

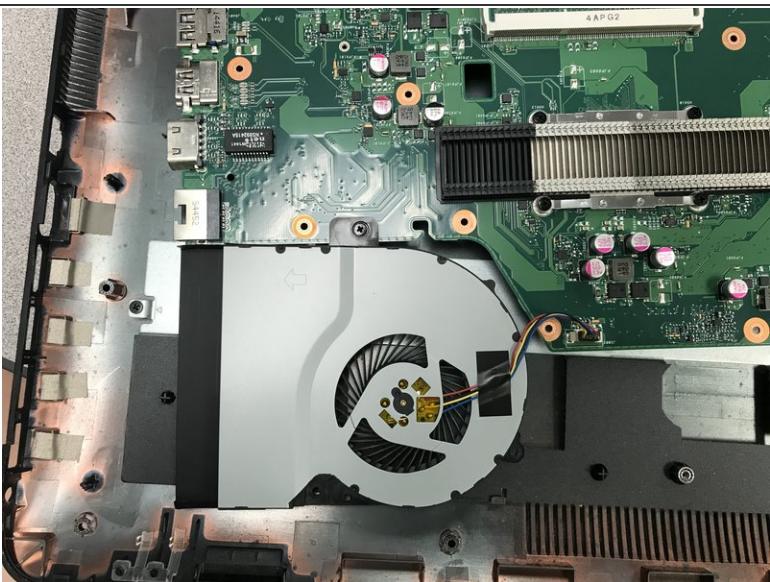


- Gently take the motherboard off the base and flip it over.
- Remove the screws securing the fan to the motherboard.

## Step 7

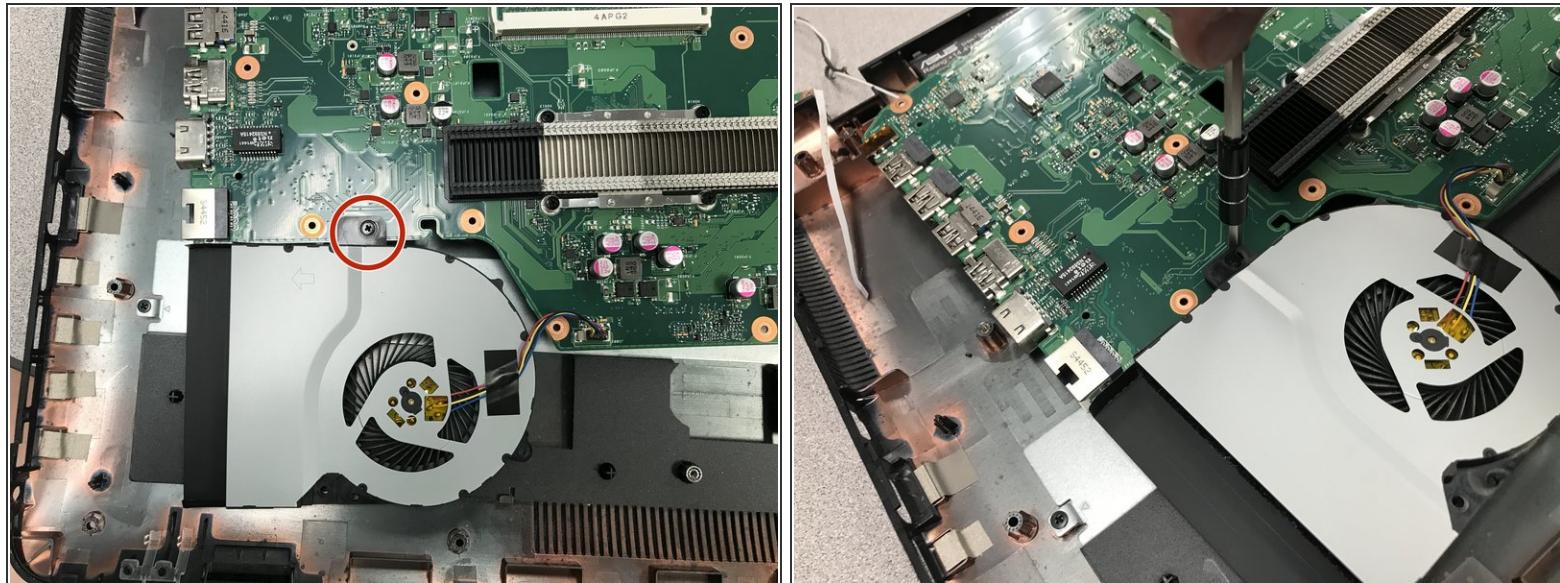

- Remove the Phillips #00 screw that holds the fan to the motherboard.

## Step 8

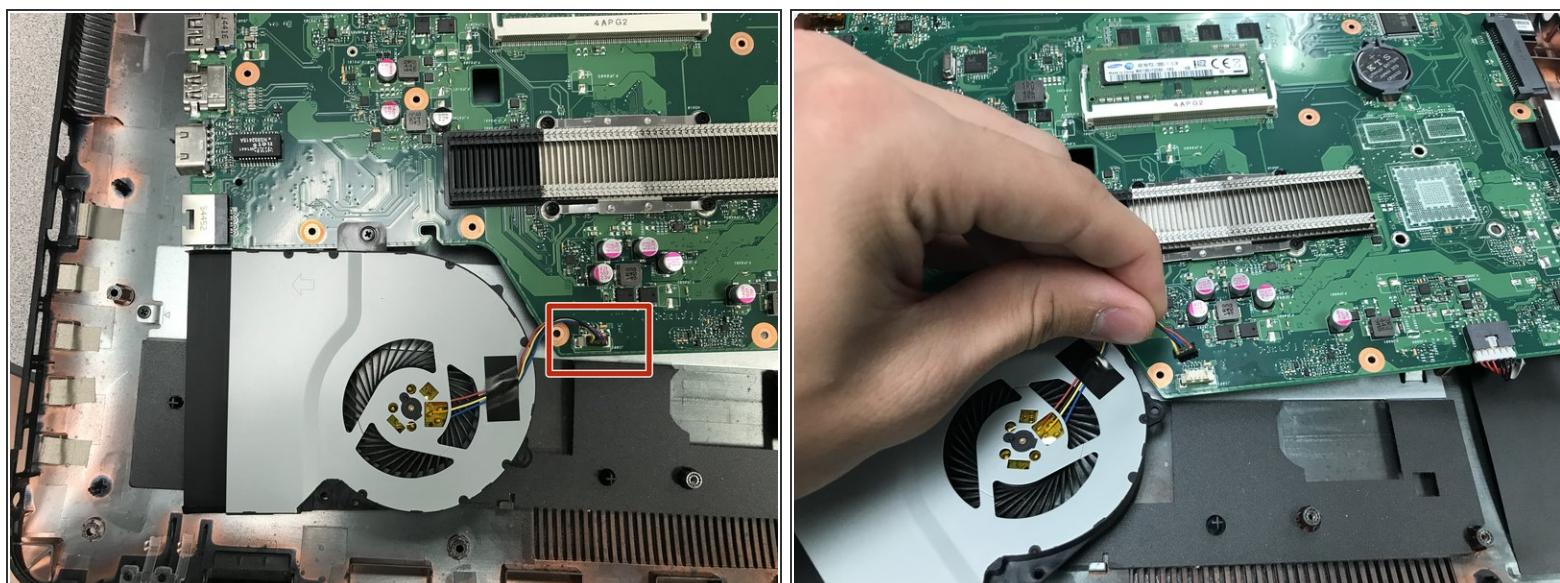

- On the bottom of the motherboard, locate the wire plugged in and pull it out to completely detach the fan from the motherboard.

To reassemble your device, follow these instructions in reverse order.