




Asus Zenbook UX303L Trackpad Replacement

This guide is intended to show how to replace the Asus Zenbook UX303L trackpad.

Written By: Fredis Benitez

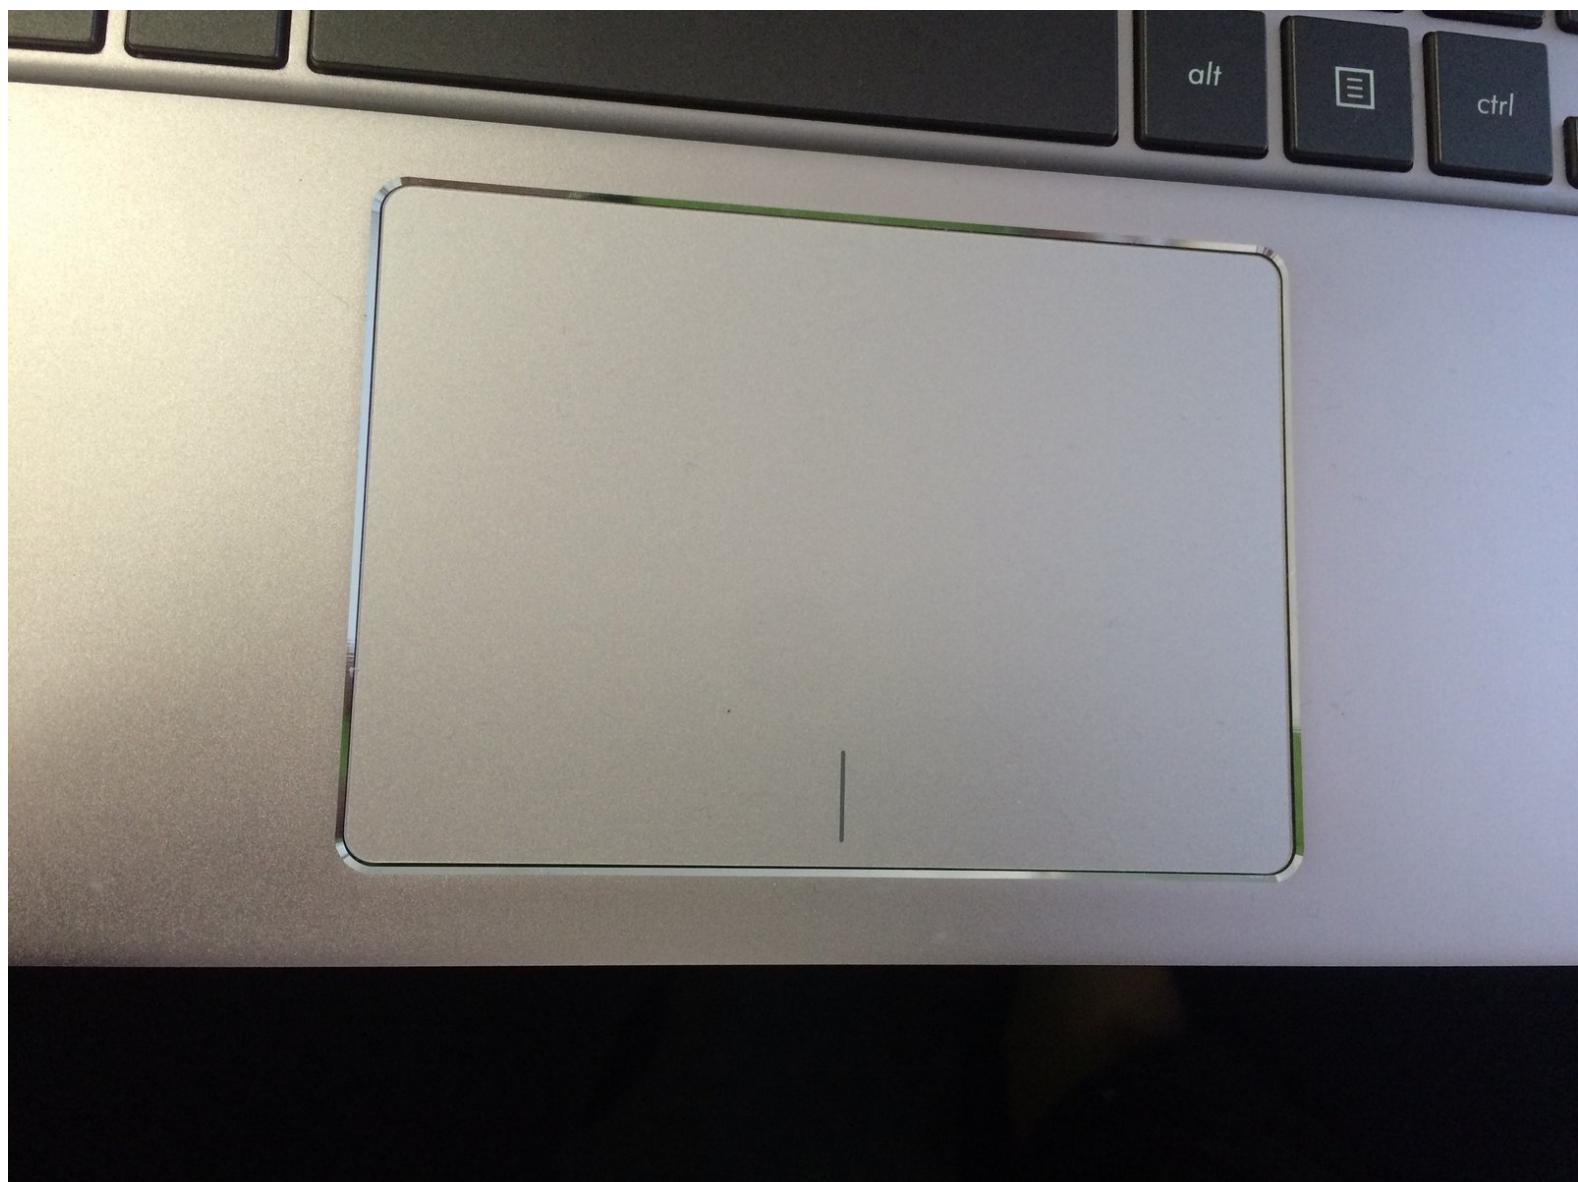

INTRODUCTION

If your Asus Zenbook UX303L is not moving its mouse, or clicking incorrectly you might need to replace its trackpad. Be sure to check your trackpad for any dust or debris that might be obstructing the trackpad's movement. This guide intends to show the process of taking apart the Zenbook and replacing its trackpad.

TOOLS:


- [T5 Torx Screwdriver](#) (1)
- [Phillips #1 Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)
- [Tweezers](#) (1)

Step 1 — Trackpad



- Make sure the device is turned off and disconnected from the battery charger.

Step 2

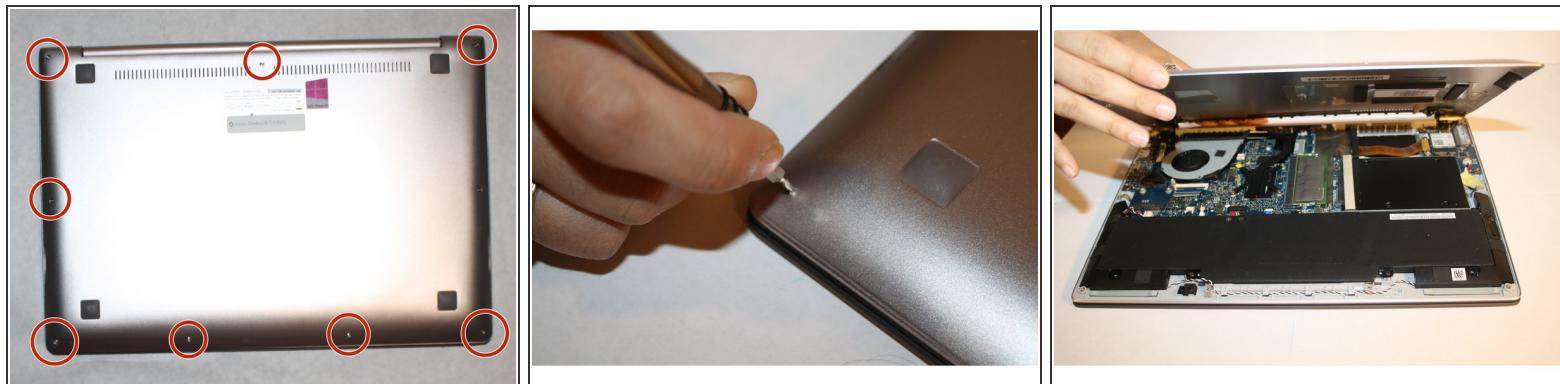




- Remove all nine screws from the bottom of the device using a T5 screwdriver.
- Carefully remove the bottom cover.

Step 3

- Remove five Phillips #1 screws from the battery pack.



Step 4

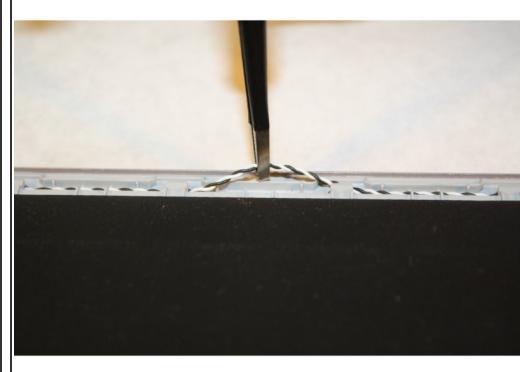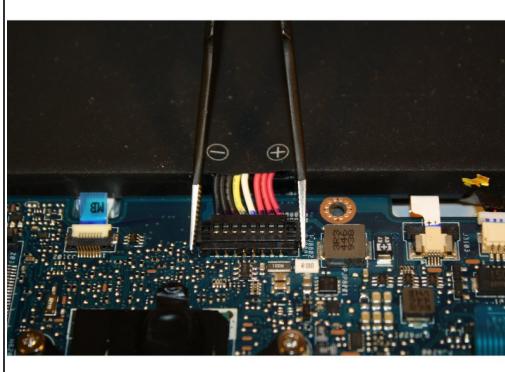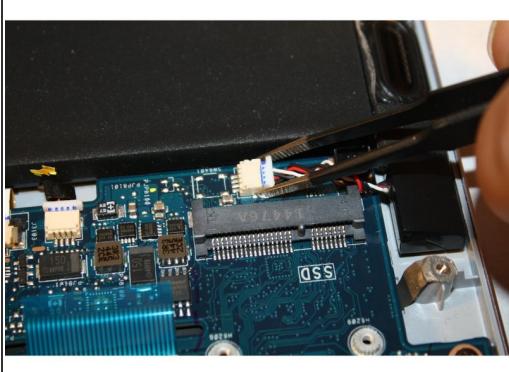


- Unhook the red, black, and white coiled switch.
- Detach the positive and negative red, black, yellow, and white switch from the motherboard.
- Unhook the black and white coiled wire from the top of the battery pack.

Step 5




- Remove the three screws connecting the SSD to the motherboard.
- Gently lift and pull out the SSD.

Step 6

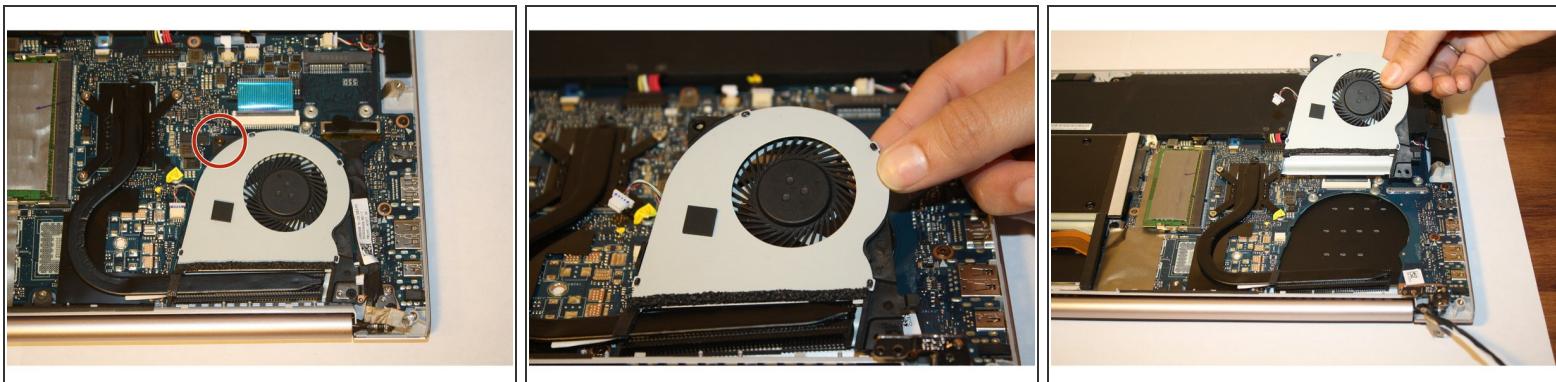


- Remove the screw attaching the cooling fan to the motherboard.
- Lift and remove the cooling fan.

Step 7

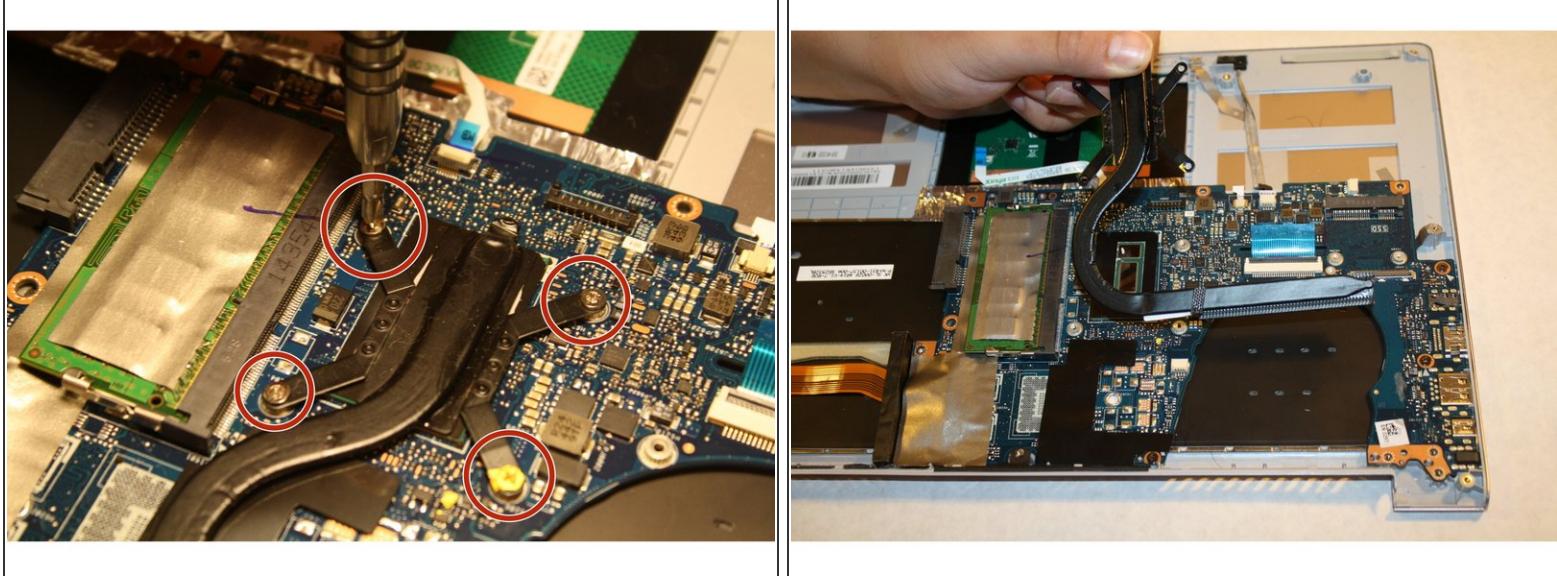


- Remove the four Phillips #1 screws attached to the black covered copper bar next to the cooling fan.
- Gently lift and remove the copper bar.

Step 8

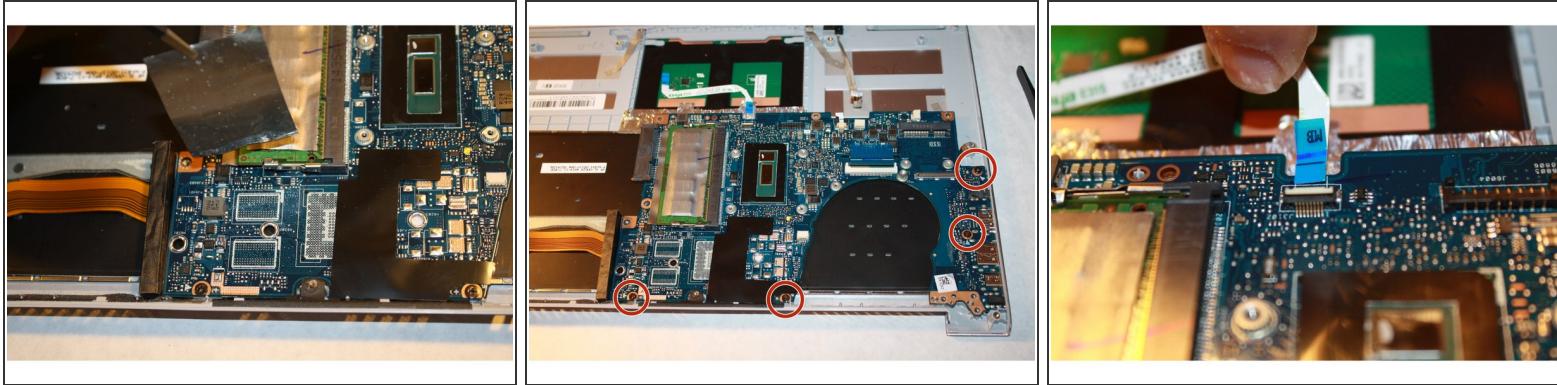


- Remove the silver tape to reveal the fourth screw on the motherboard.
- Detach the motherboard by removing the four Phillips #1 screws.
- Detach the white wire connecting the motherboard by lifting the black flap and pulling it out.

Step 9

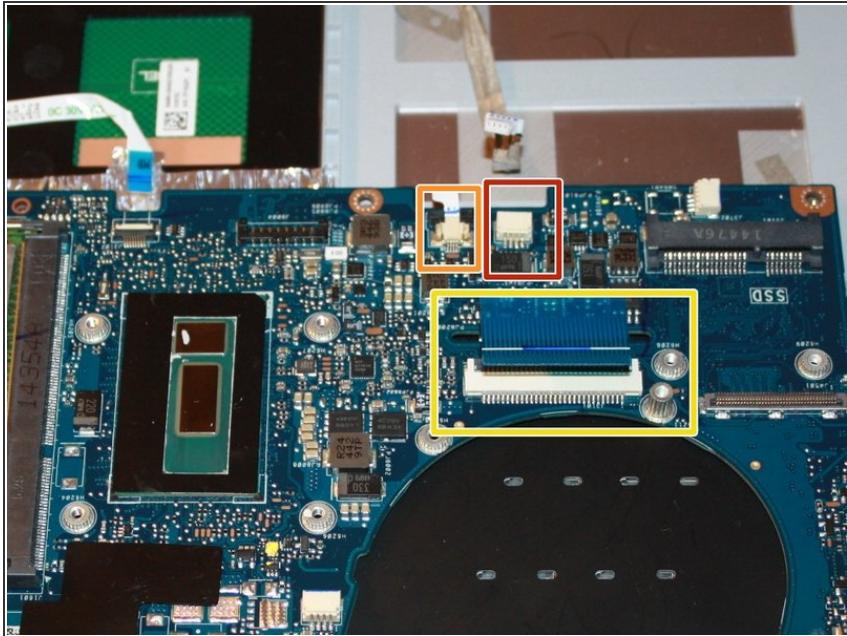



- By using ESD-safe tweezers, remove the gray colored wire.
- Remove the white wire using tweezers.
- Remove the blue colored wire by lifting the black flap and pulling the blue flap out.

Step 10

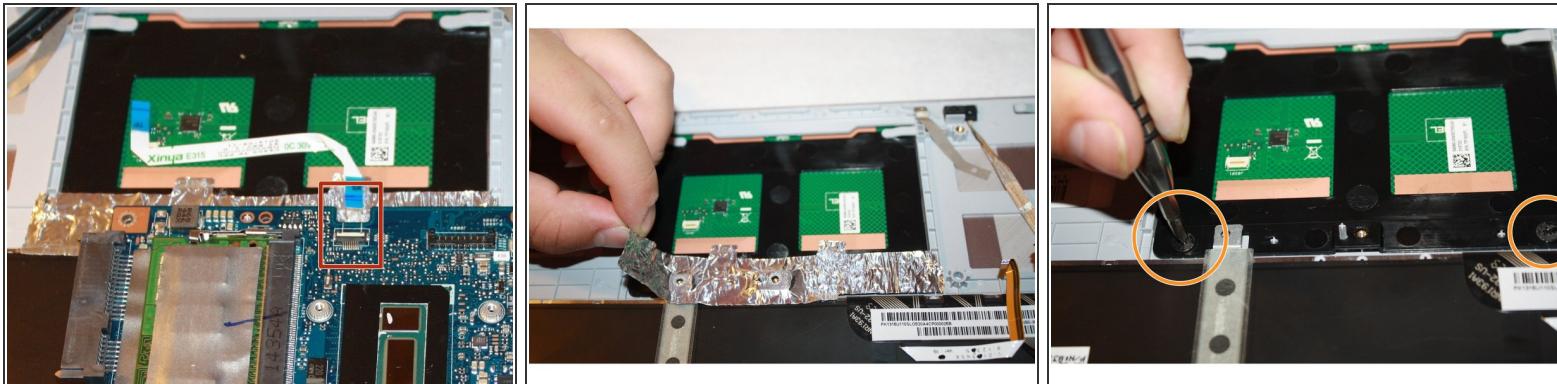

- Remove the white wire with the blue ends by lifting the black flap with tweezers and gently pulling out.
- Gently remove the silver tape using tweezers.
- Remove the Phillips #1 screws.

Step 11

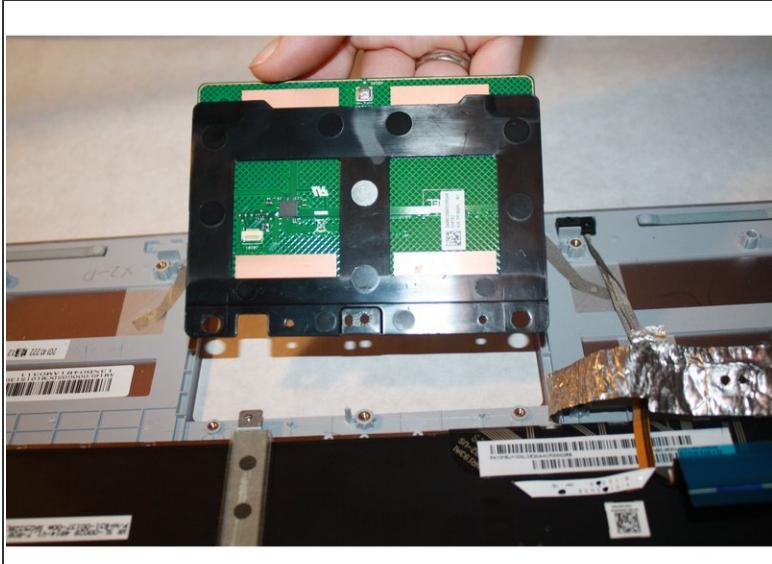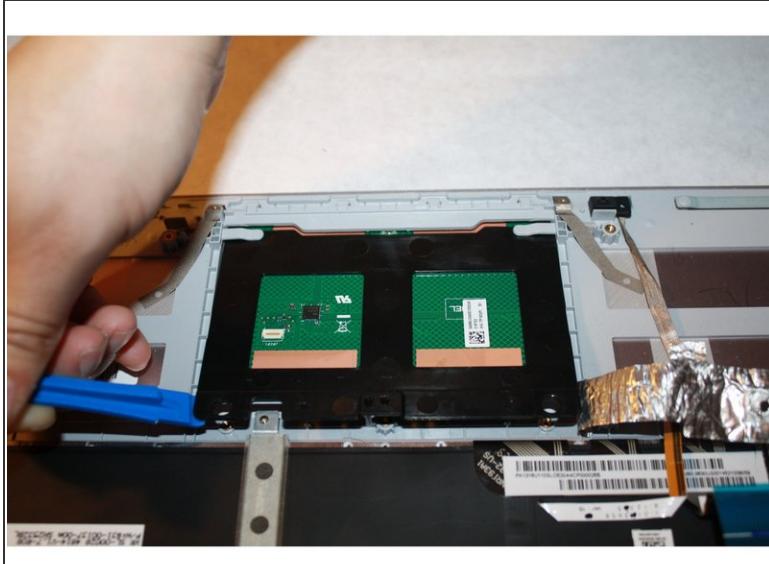

- Place the plastic opening tools under the trackpad.
- Gently pull out and remove the trackpad.

To reassemble your device, follow these instructions in reverse order.