




Beats Pill 1.0 Battery Replacement

This guide will show the steps needed to replace the battery for the Beats Pill 1.0

Written By: Paul Haas

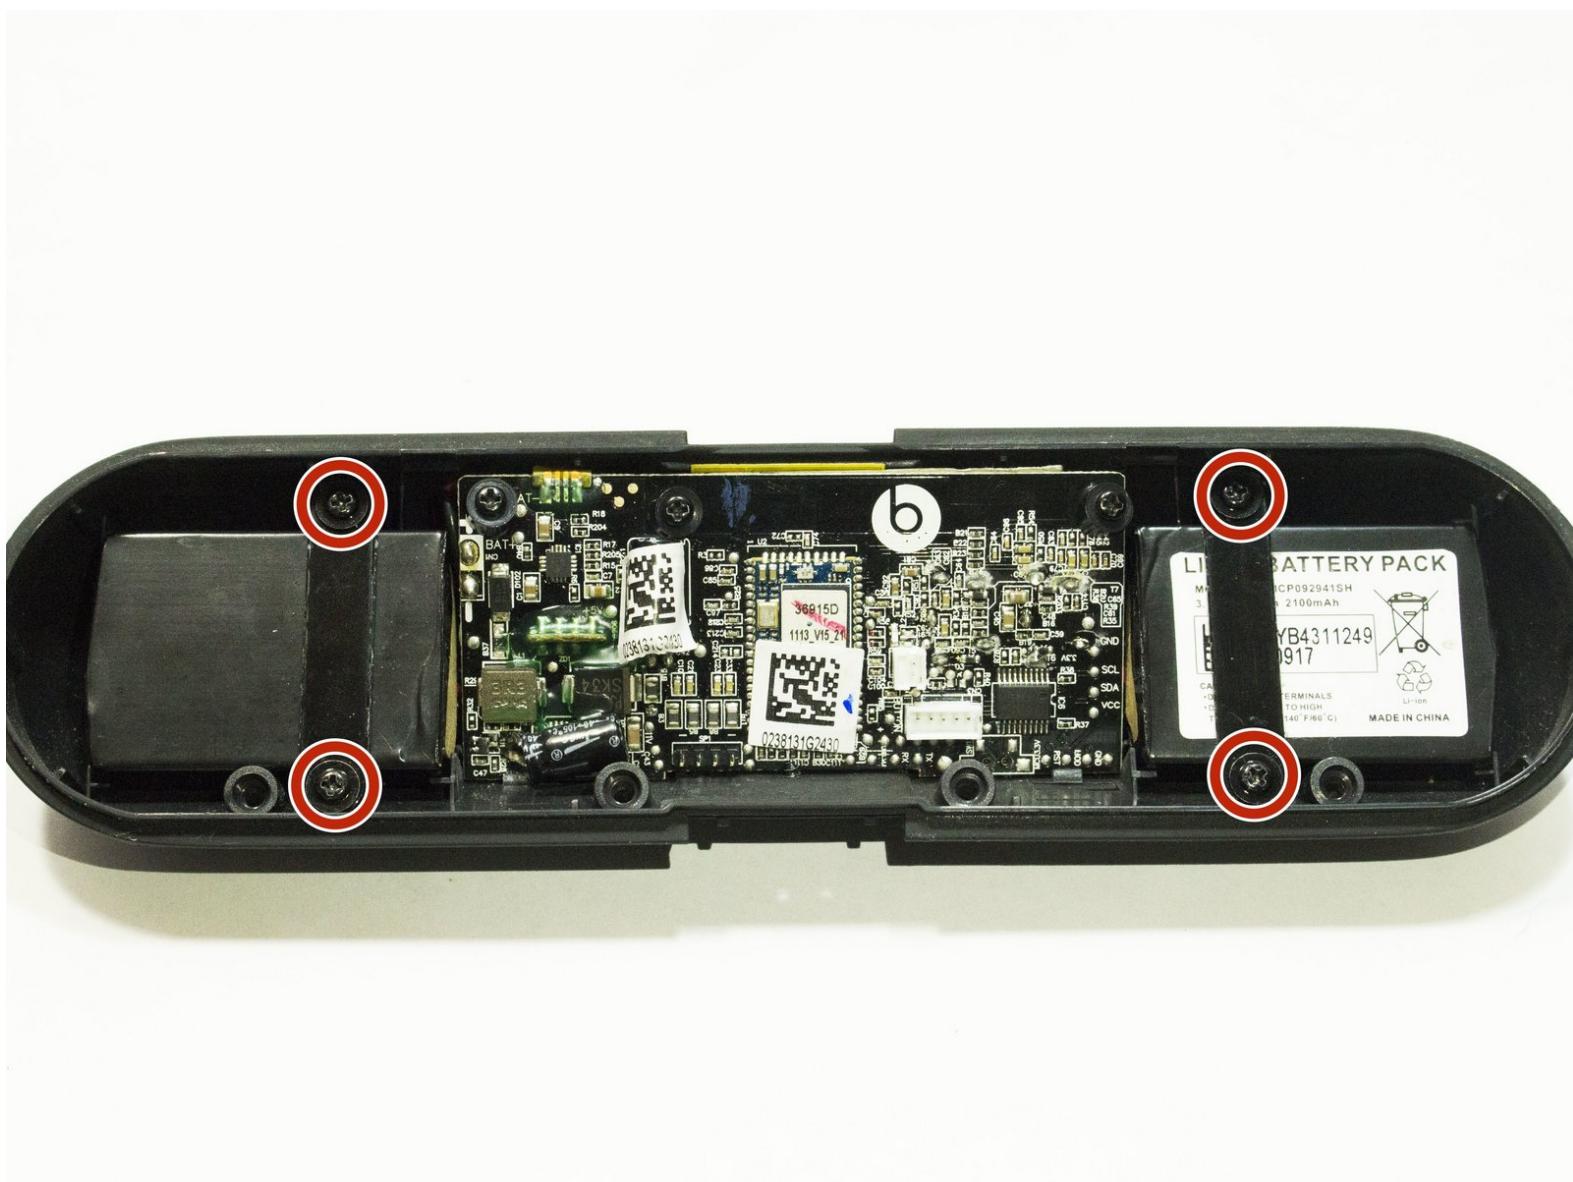

INTRODUCTION

For general disassembly guide follow this [link](#). This guide will follow the steps taken in the general disassembly of the Beats Pill 1.0.

TOOLS:

- Phillips #0 Screwdriver (1)
- Phillips #00 Screwdriver (1)
- Spudger (1)
- Soldering Iron (1)
- Tweezers (1)
- Wire cutters/side cutters (1)
- Wire stripper/crimping tool (1)

PARTS:

- Beats Pill 1.0 Replacement Battery (1)

Step 1 — Removing the Case Screws



- Using the spudger, create space between the speaker covers and then remove.
- On the underside of the device, remove the rubber stand with the BeatsPill logo on it.
- Using a Philips #0 Screwdriver that is ESD-safe. Remove the four screws that were underneath the rubber stand.

Step 2 — Removing Center Cover



- Remove the two Philips #0 screws with the ESD-safe screwdriver.
- Slowly remove the center band and 2 clip rings until the adhesive separates as to prevent damage.

Step 3 — Separate the Device



- Using the spudger, starting in the middle, pry the device apart along it's seam as circled in pink.
- Open the device to separate the two main bodies of the device. The device should look as picture above.



Step 4 — Disconnect Speaker Wiring



- Remove the speaker wire(yellow, red, black, white) from the mother board.


 Ground yourself when touching the motherboard

Step 5 — Disconnect NFC Sensor Wiring

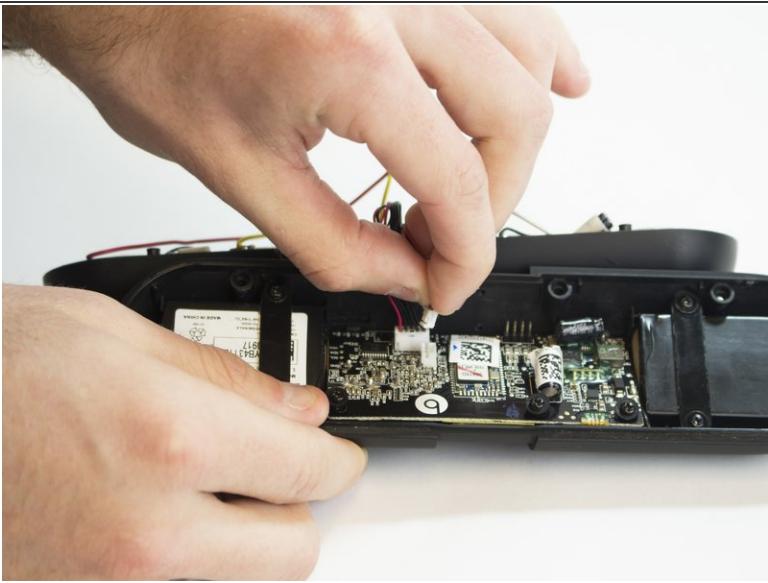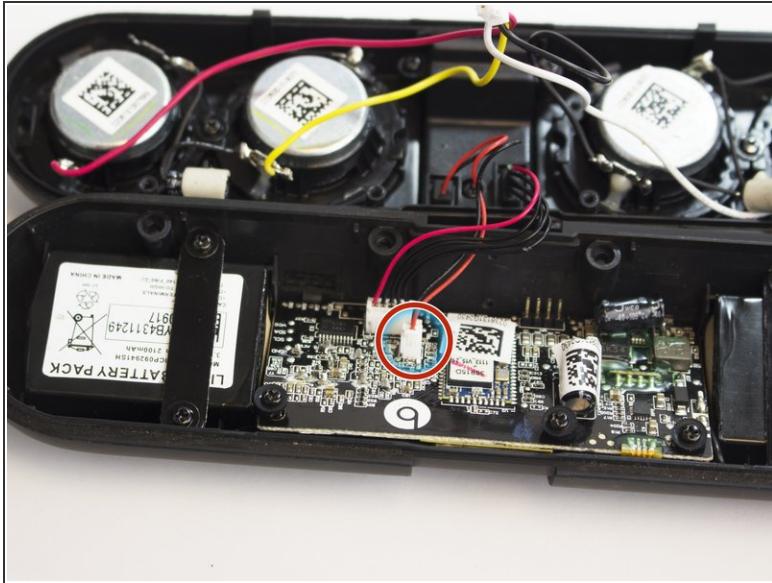


- Carefully remove the NFC sensor wire (black, red)

Step 6 — Disconnect Control Wiring

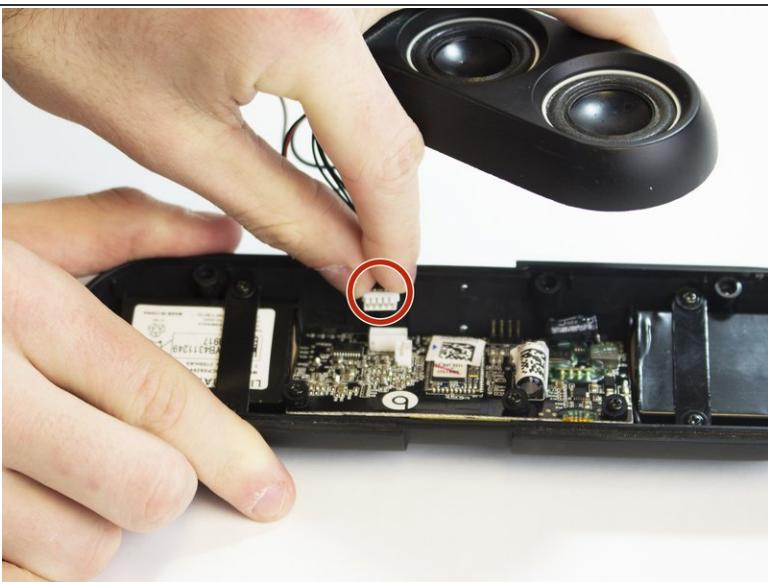

- Carefully remove the control cable(4 black, 1 red)

Step 7 — Battery

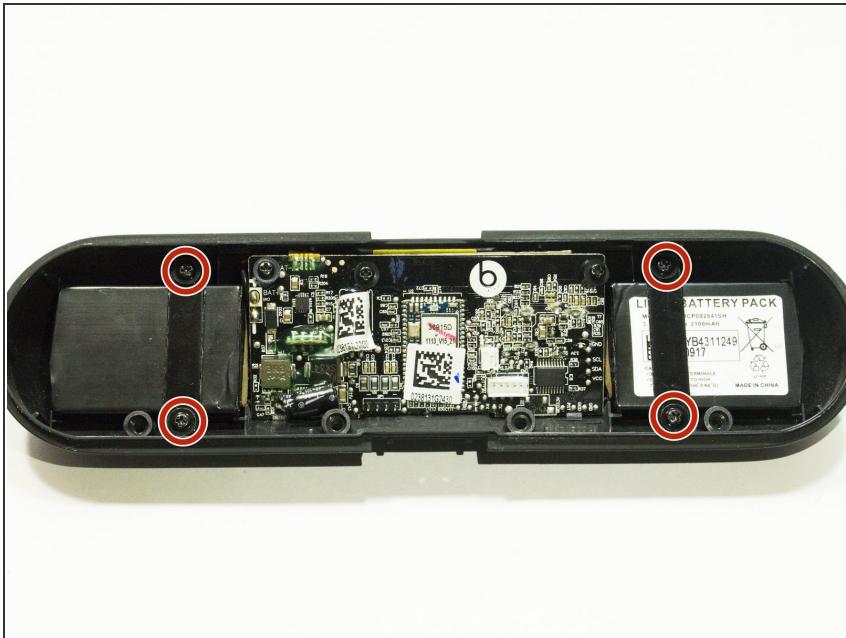


- Using a [Phillips #0 Screwdriver](#), unscrew the four screws holding the bands that go over the battery.

Step 8 — Remove motherboard screws




- Using the same [screwdriver](#), remove the motherboard screws along with the rubber stoppers.

Step 9 — Remove the motherboard

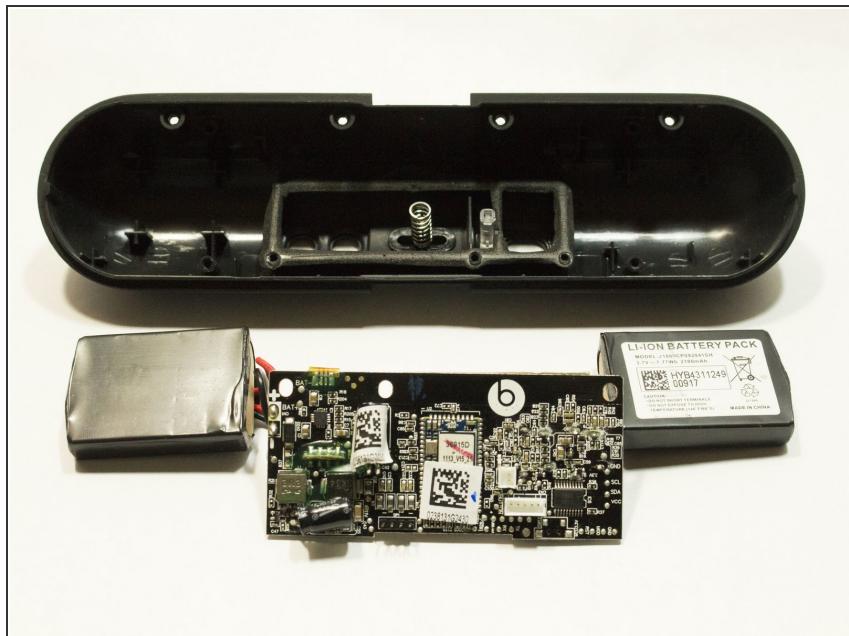


- Gently remove the motherboard from the case
- Remove the yellow NFC module with [Tweezers](#)

Step 10 — Remove the power button

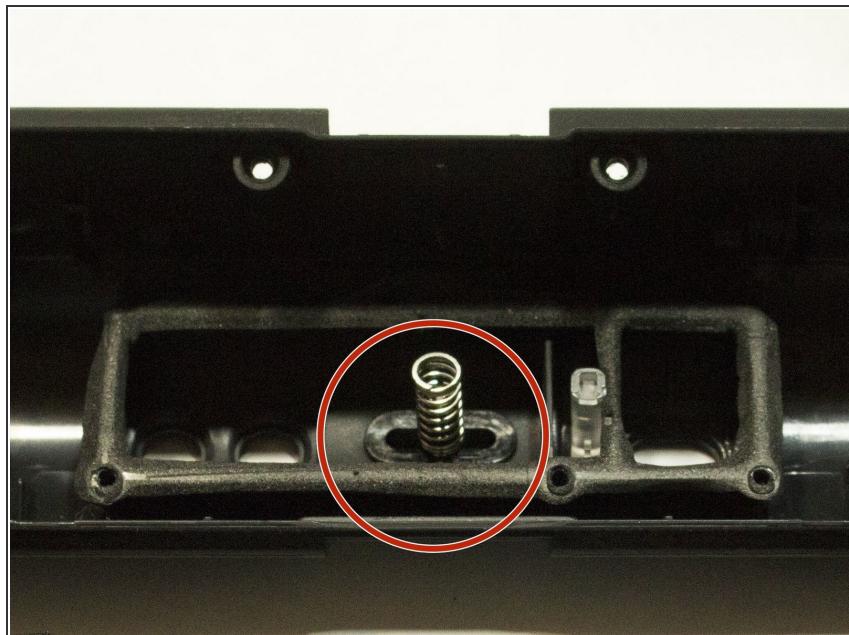


- Remove power button and springs.

Step 11 — Cut off battery

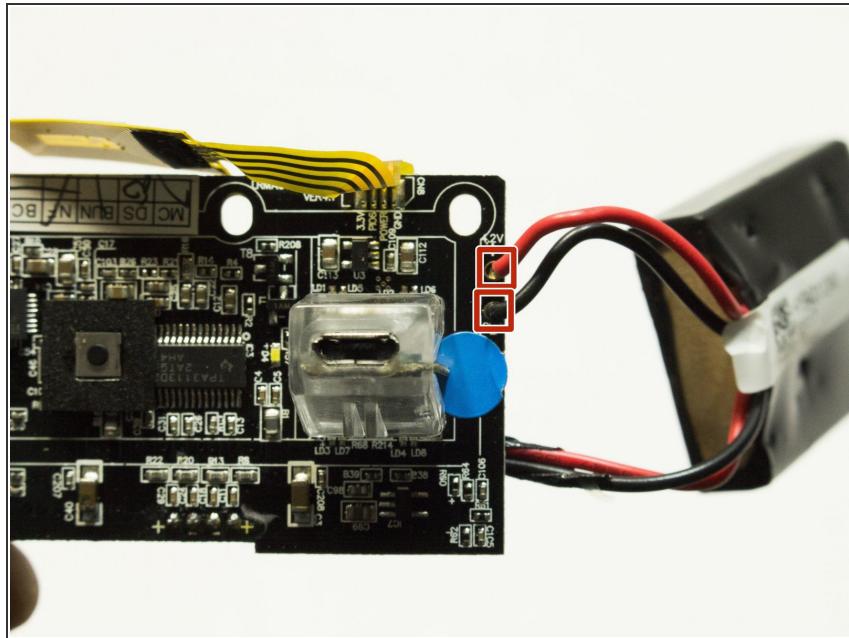

- Cut off the battery wires

Step 12 — Attach new battery

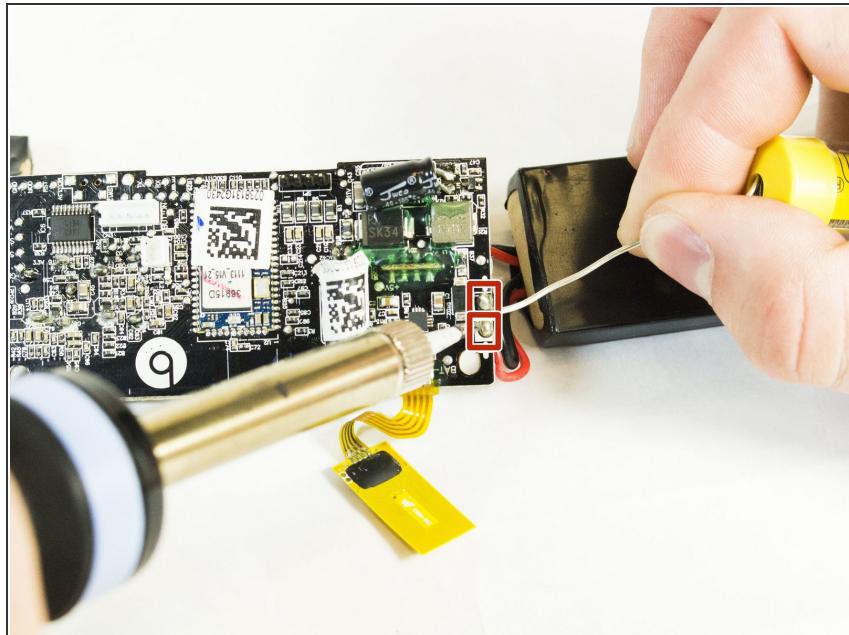

- Using a soldering iron attach the new battery to the motherboard with the red wire connecting to the 0.2 volts (+) and black wire connecting to the ground (-). See the [soldering guide](#) for more information on how to perform this step.

To reassemble your device, follow these instructions in reverse order.