




# Besta Super 5000 Motherboard Replacement

This guide informs users how to remove and replace the motherboard on the Besta Super 5000.

Written By: Jessie

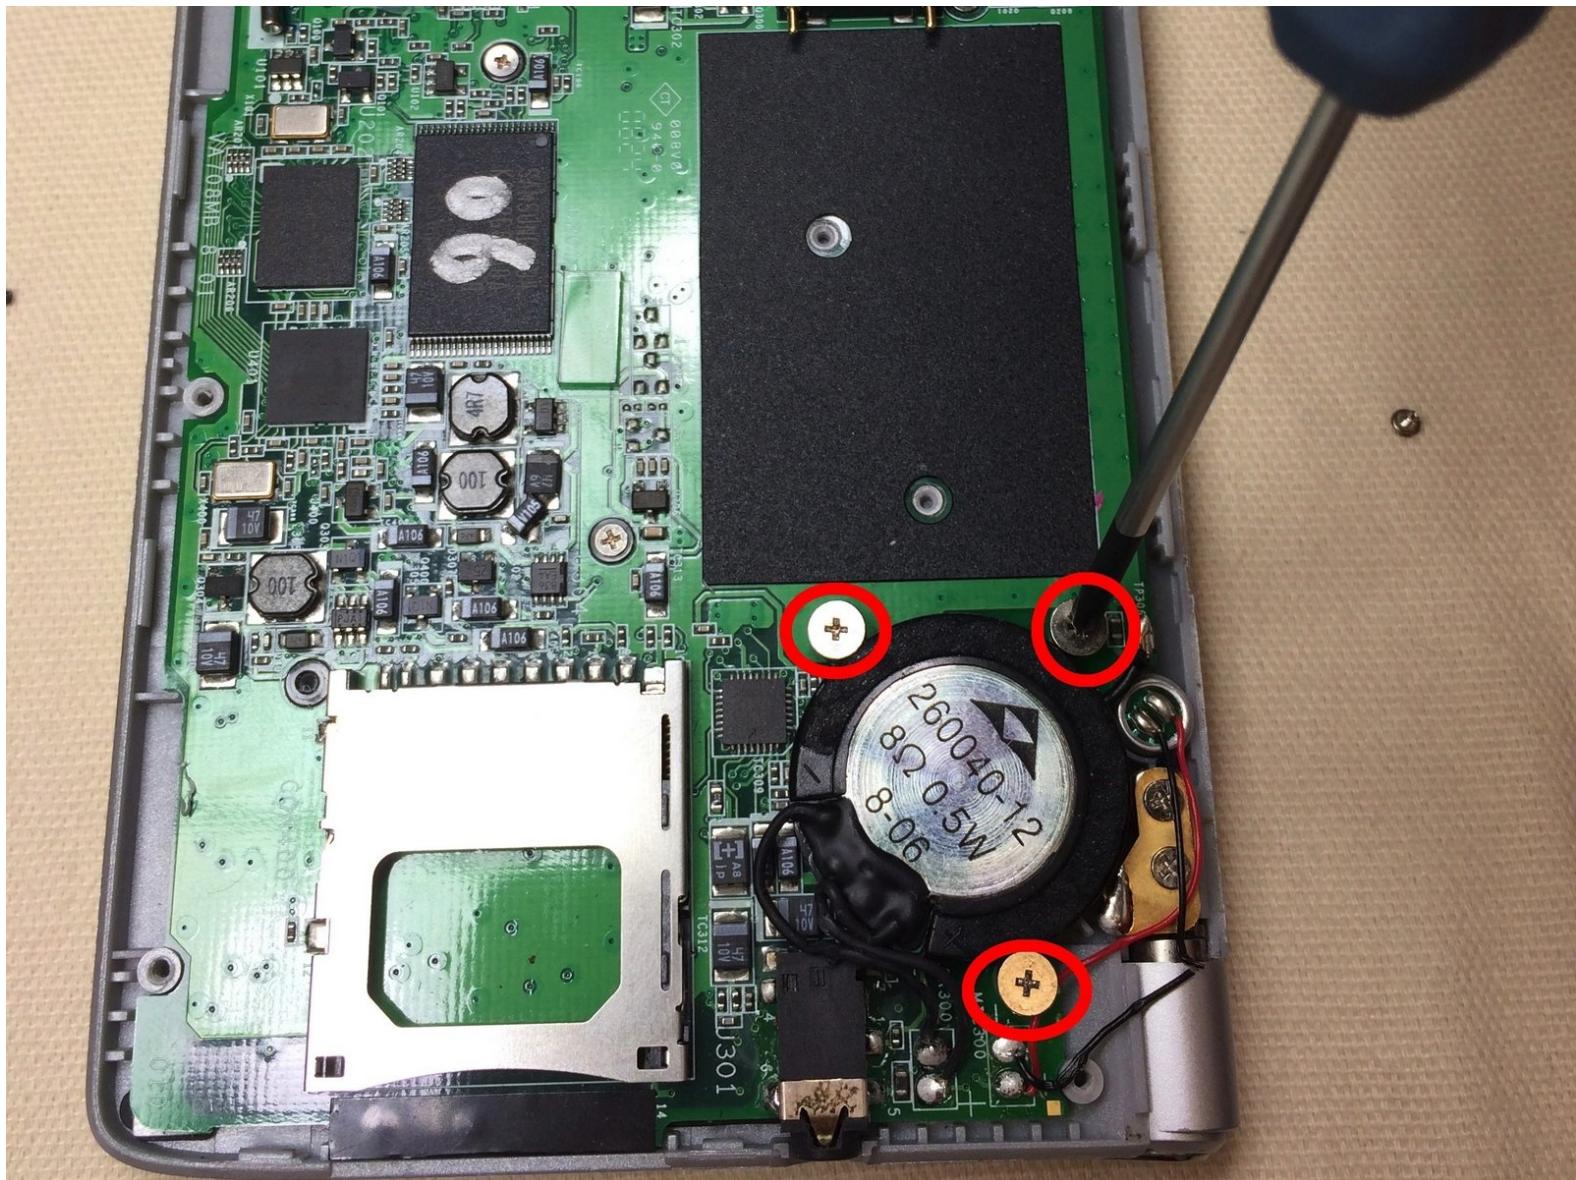

 **TOOLS:**

- Phillips #0 Screwdriver (1)
- 1 x Flat Blue iFixit Opening Tool (1)
- 1 x Thin Black iFixit Tweezers (1)

## Step 1 — Battery




- Flip the device on its back.

## Step 2




- Slide off the battery panel with your fingers.

## Step 3

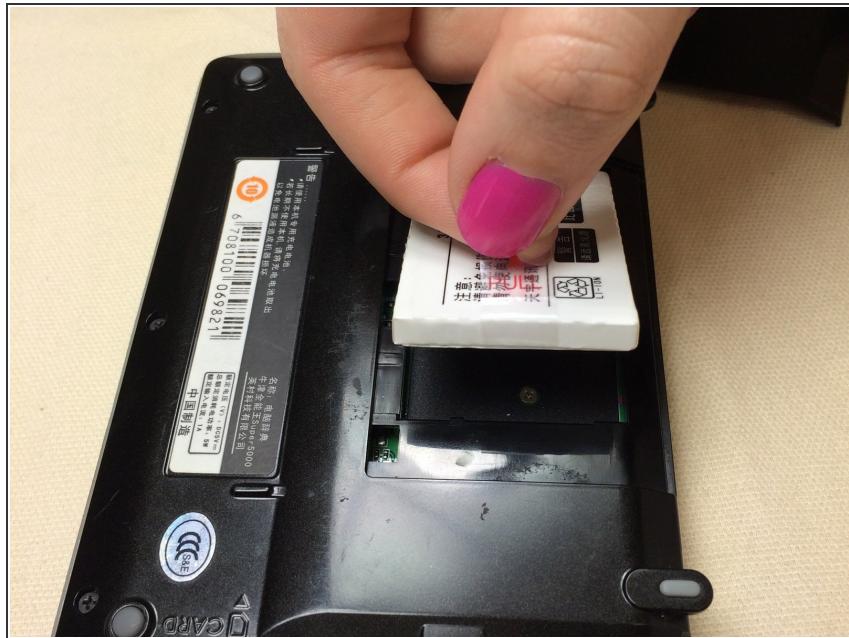

- Pull the plastic tab on the battery to remove it from the device.

## Step 4 — Back Cover

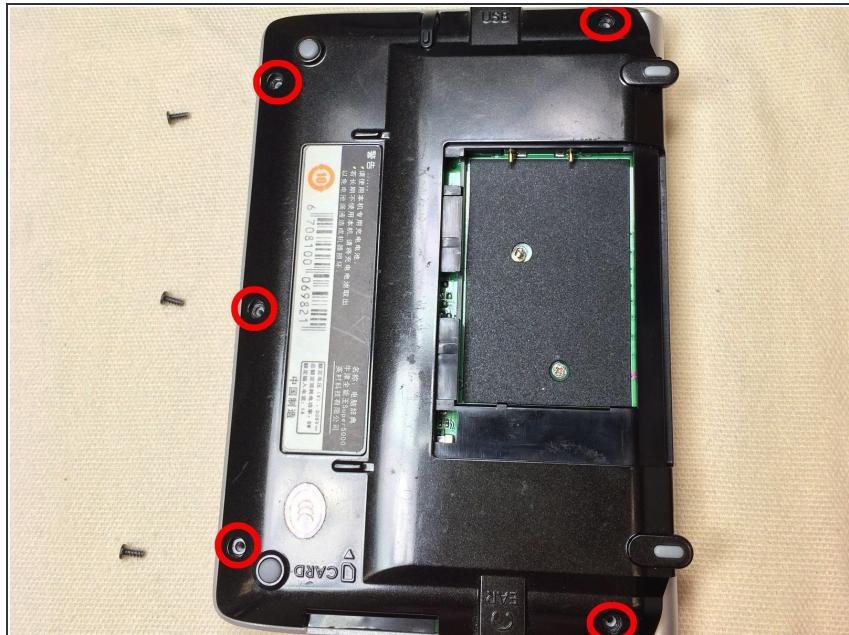


- Remove the five screws around edge of device using Phillips #0 screwdriver.

 **WARNING:** Be careful not to lose the screws because they are needed for reassembly.


 **TIP:** Keep each group of screws together to help with reassembly since some vary in size.

## Step 5

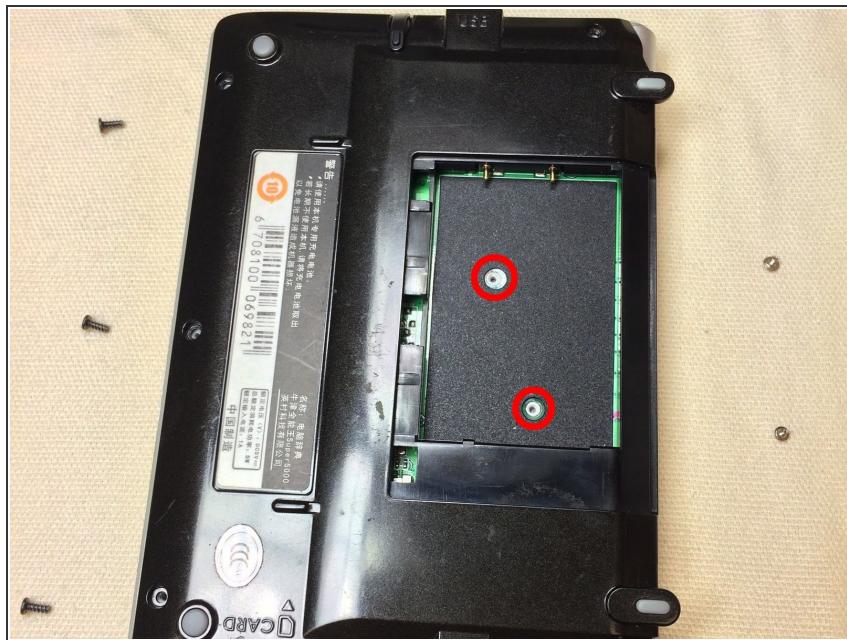

- Remove the two screws behind the battery using a Phillips #0 screwdriver.


## Step 6

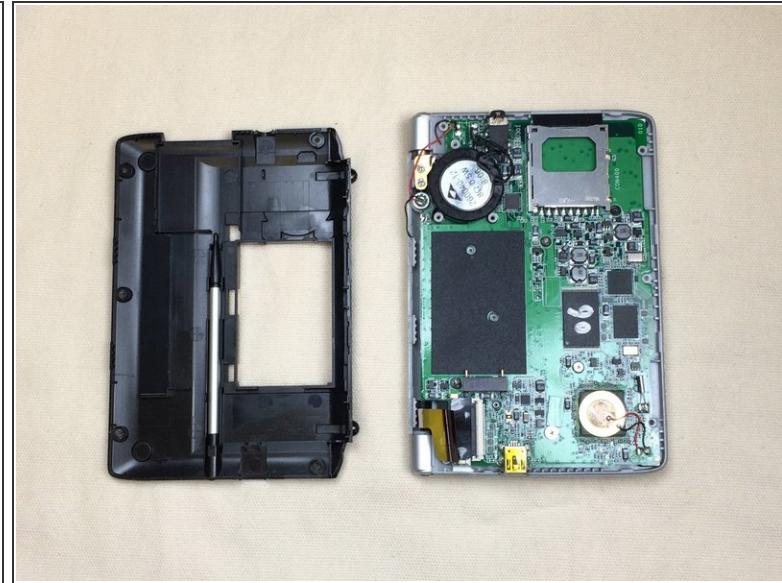

! **WARNING:** All screws must be removed before you begin this step. Do not forcefully pry apart the device with screws still in it because you may damage it.


- Gently pry off the backing using flat blue iFixit opening tool.

## Step 7 — Motherboard

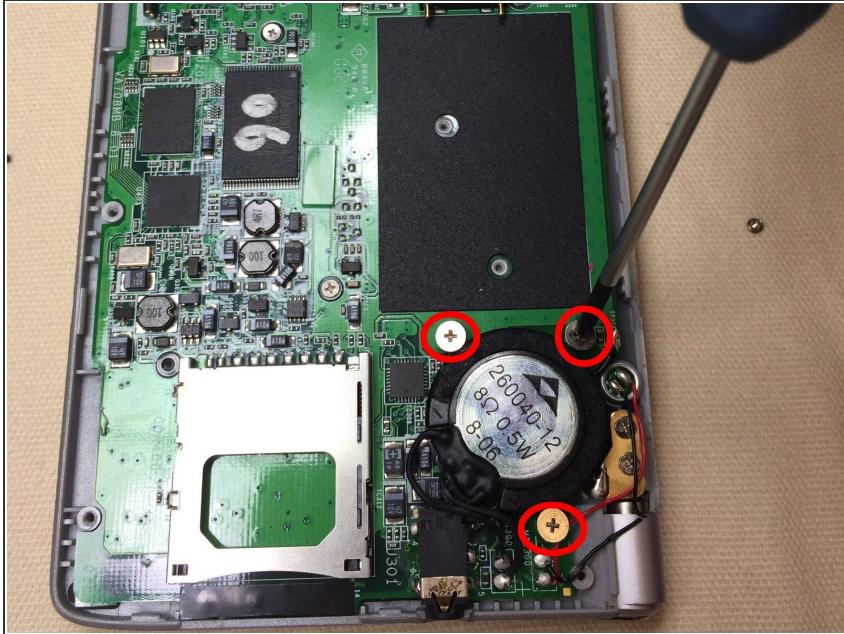


- Remove three silver screws from black round battery using Phillips #0 screwdriver

## Step 8

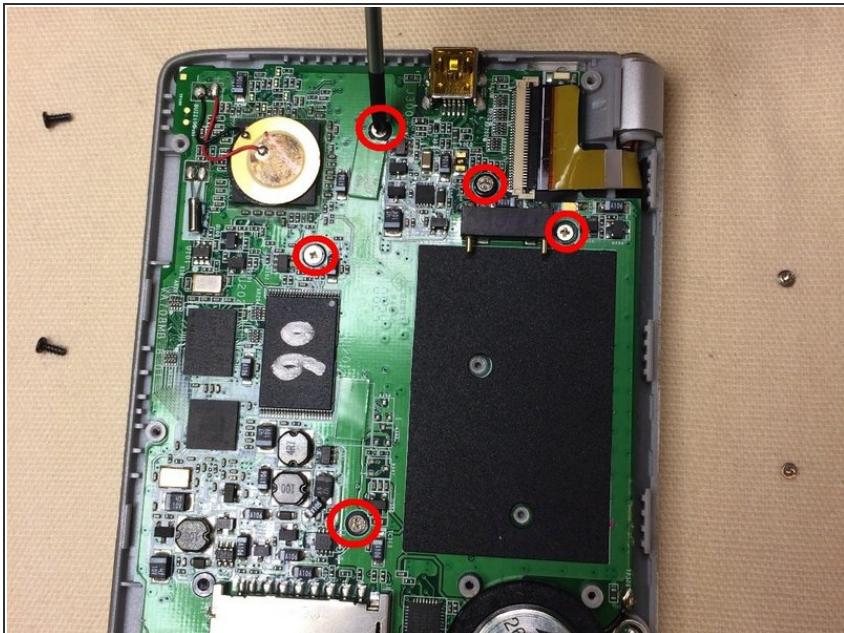

- Remove five small screws from around side of the motherboard using a Phillips #0 screwdriver
- NOTE: There are two different sizes of screws, but they can be removed with the same screwdriver head

## Step 9

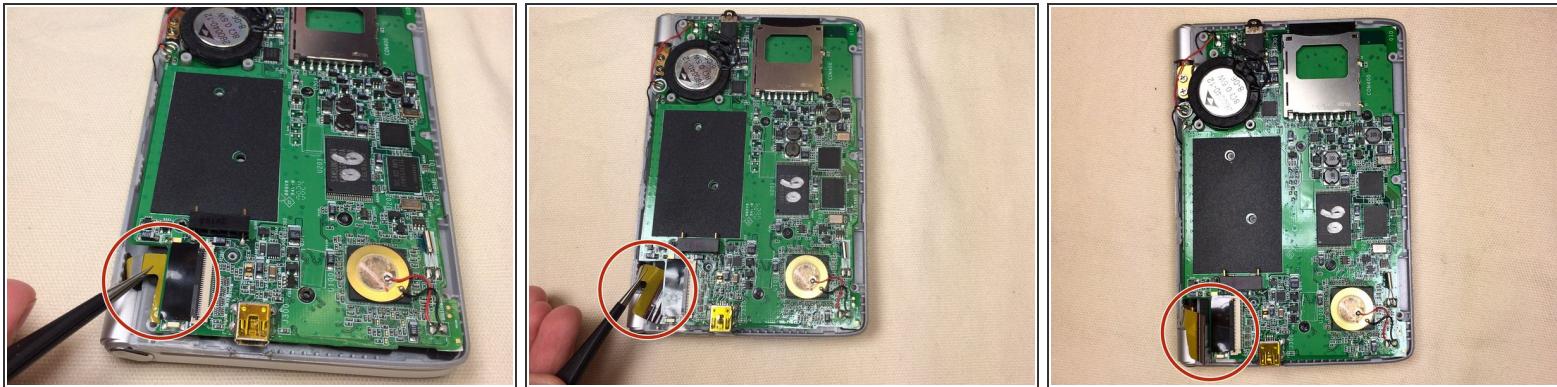


- Using the thin black iFixit Tweezers, pinch the center of the yellow ribbon located in the corner of the device

**⚠ WARNING:** Do not yank or remove the ribbon from the device

- Carefully pull the hidden piece of ribbon out from underneath the motherboard


## Step 10

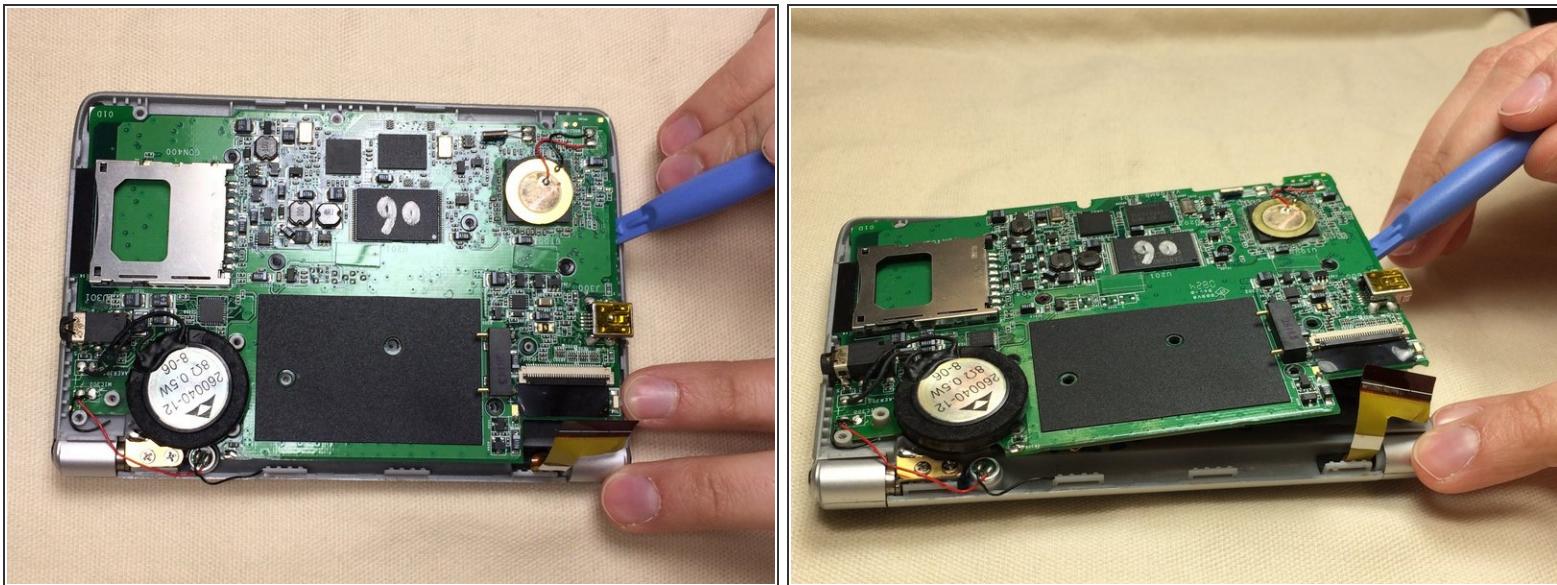

**⚠ WARNING:** All screws must be removed before you begin this step. Do not forcefully pry apart the motherboard with screws still in it because you may damage it.



- Carefully pry off the motherboard with the blue iFixit Opening Tool.

## Step 11

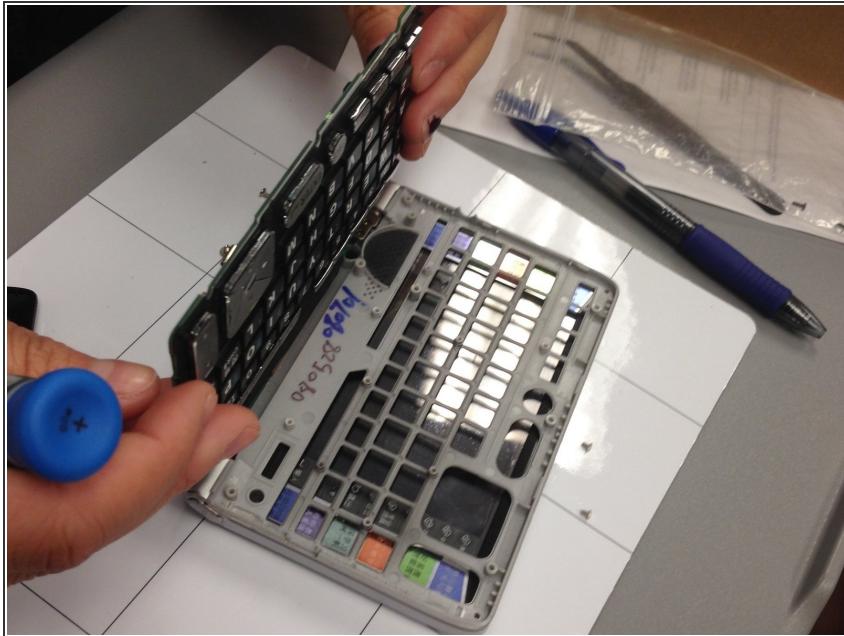

- Take the motherboard out of the body frame.

## Step 12

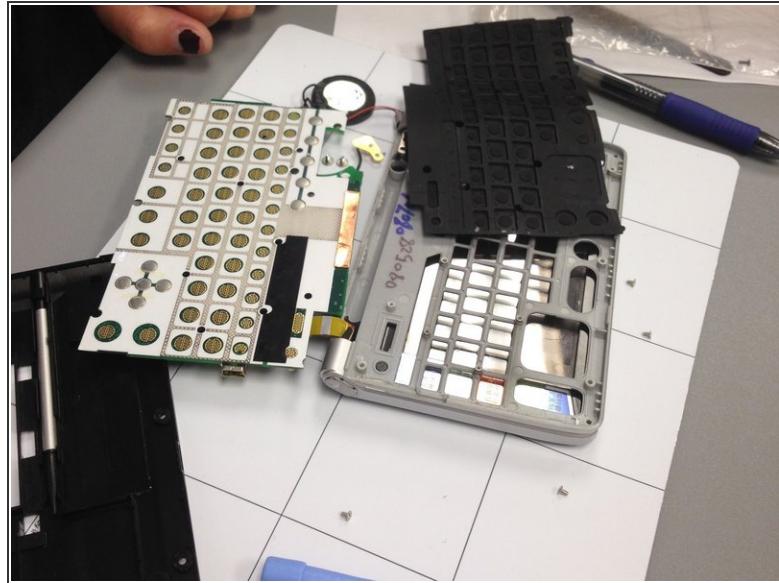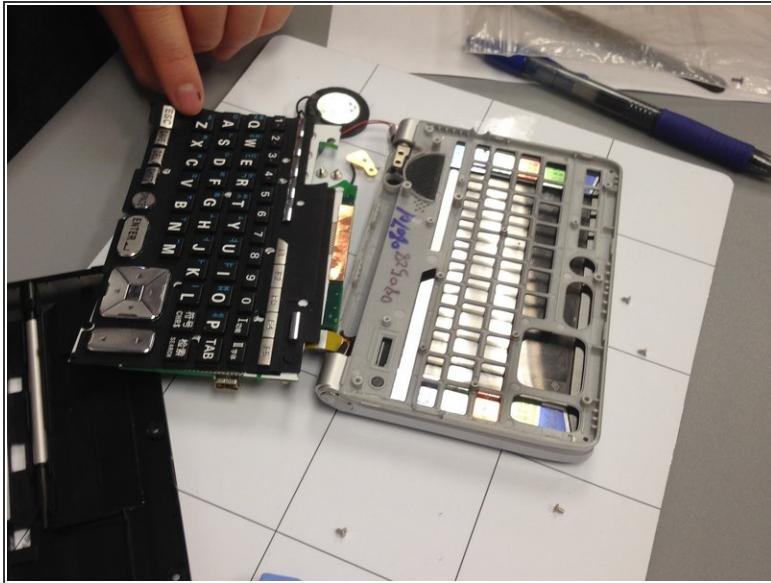

- Lift off the black keyboard mat from the motherboard.
- Replace the motherboard.
- Reverse the steps to put the device back together.

To reassemble your device, follow these instructions in reverse order.