




# Blackberry Curve 8310 Screen Housing Replacement

This guide will show you how to replace the screen housing that contains the handset speaker on your Blackberry Curve 8310.

Written By: Sean Willis

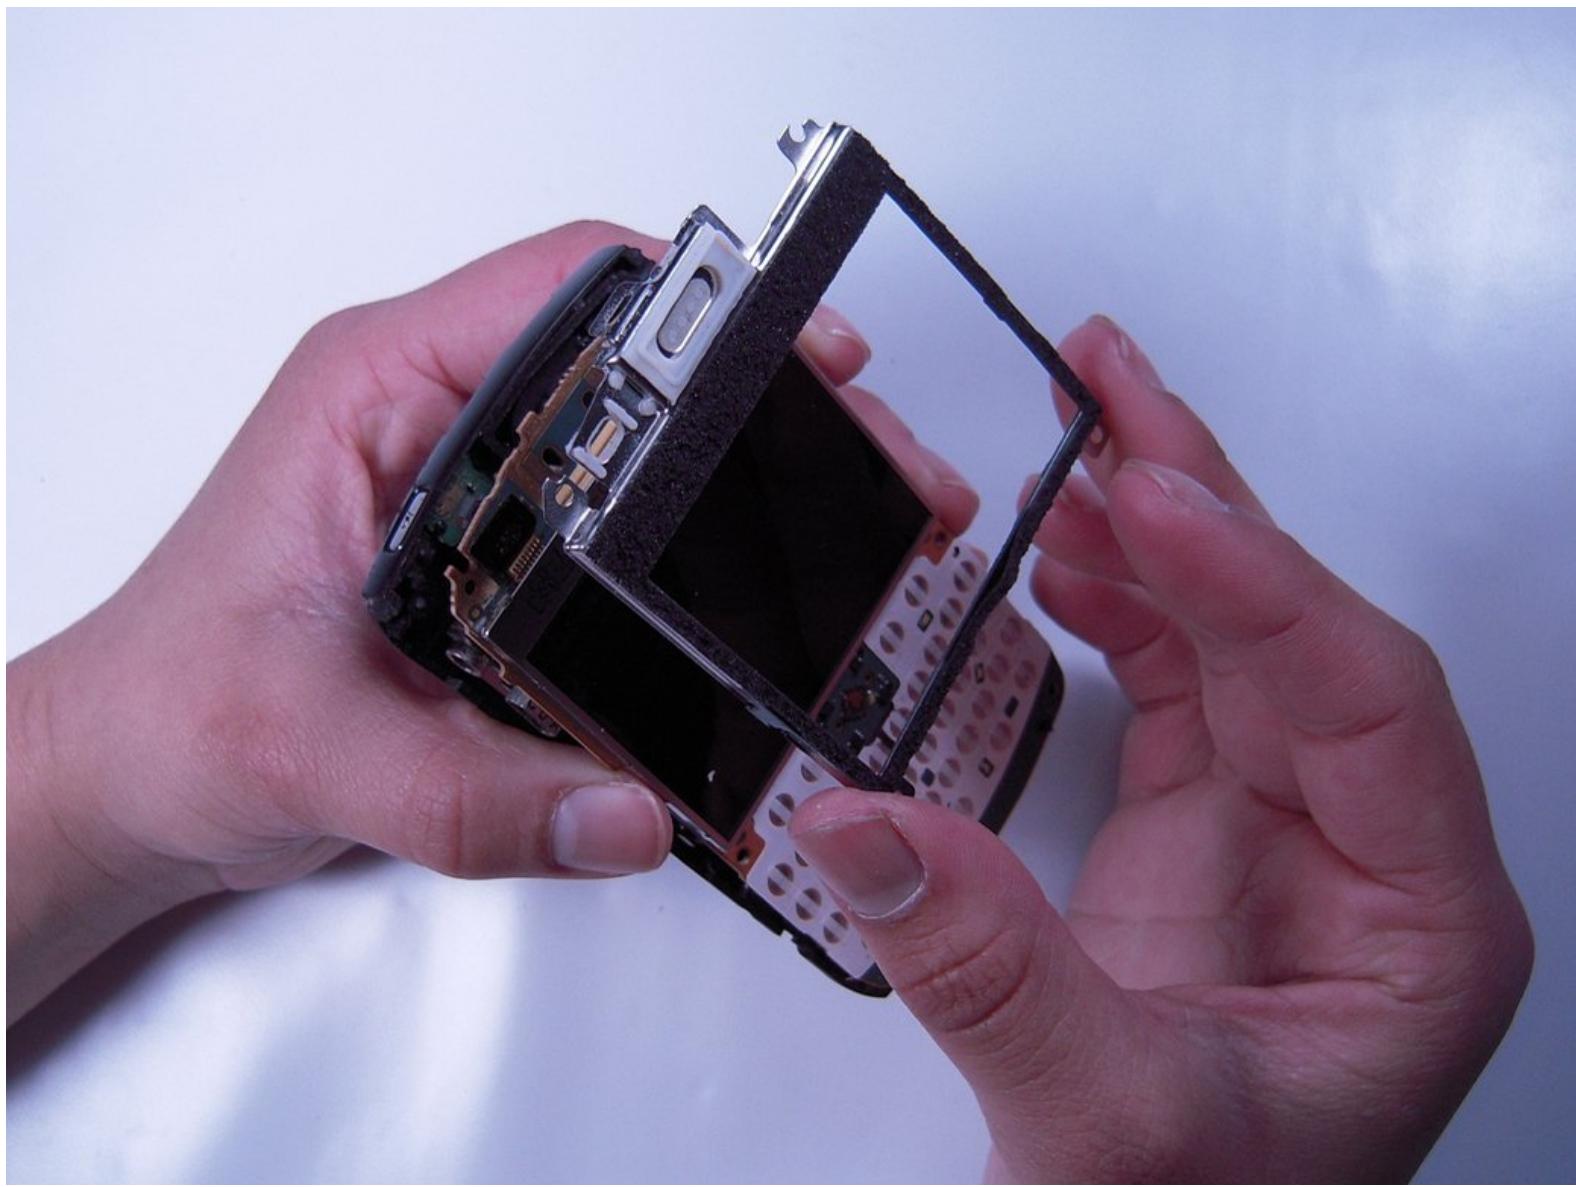


This document was generated on 2019-11-21 03:47:14 AM (MST).

 **TOOLS:**


- [iFixit Opening Tools](#) (1)
- [T5 Torx Screwdriver](#) (1)
- [Tweezers](#) (1)
- [T6 Torx Screwdriver](#) (1)

## Step 1 — Battery

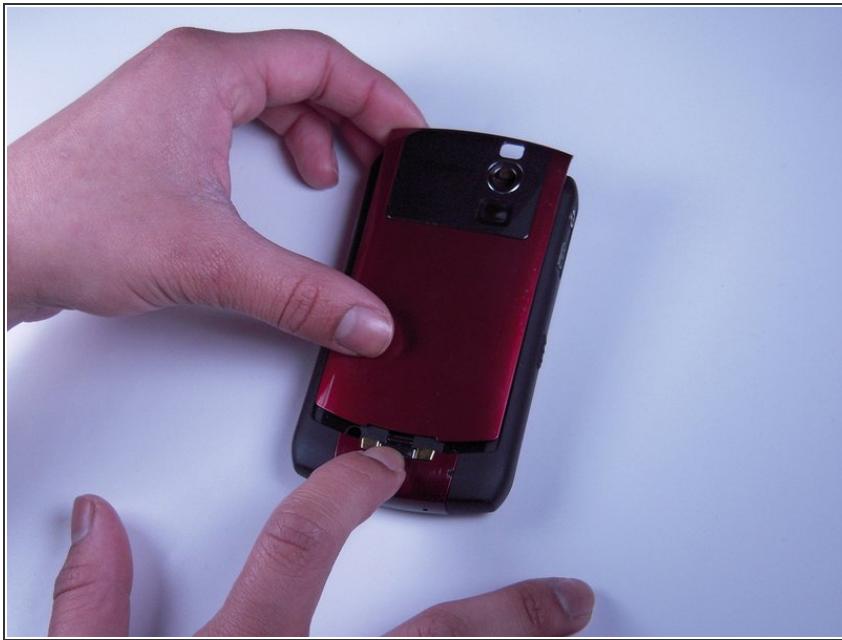


- Press down on the battery release button and slide the back cover up with your thumb.

## Step 2

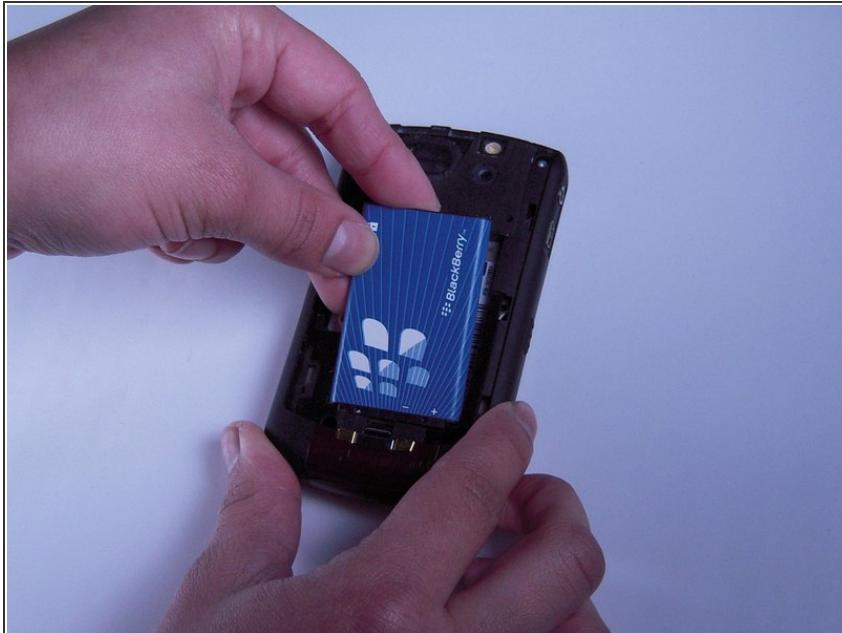

- Pry from the top of the battery to pull it out.


## Step 3 — Lens

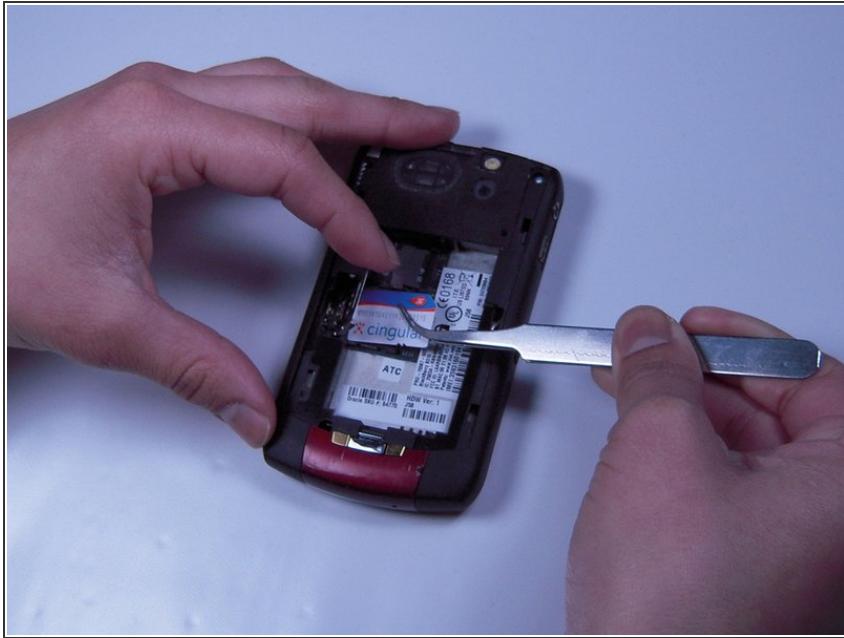

- Slide the metal sim card cover to the unlock position.
- Remove the sim card.

**i** The arrows on the sim card enclosure indicate the lock and unlock positions.


## Step 4

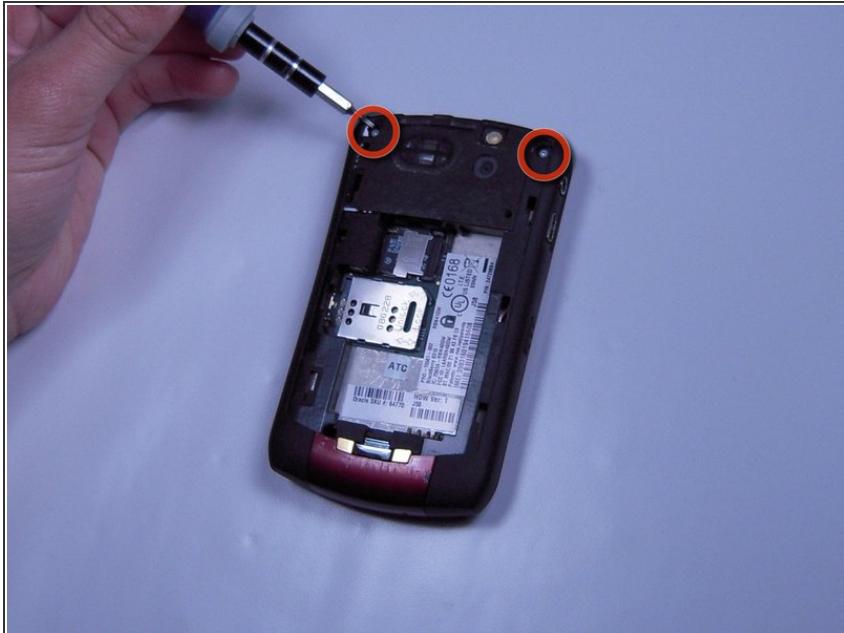

- Remove the two T5 Torx screws circled at the top of the phone.

**i** The T5 Torx screws may be covered by a white sticker.

## Step 5

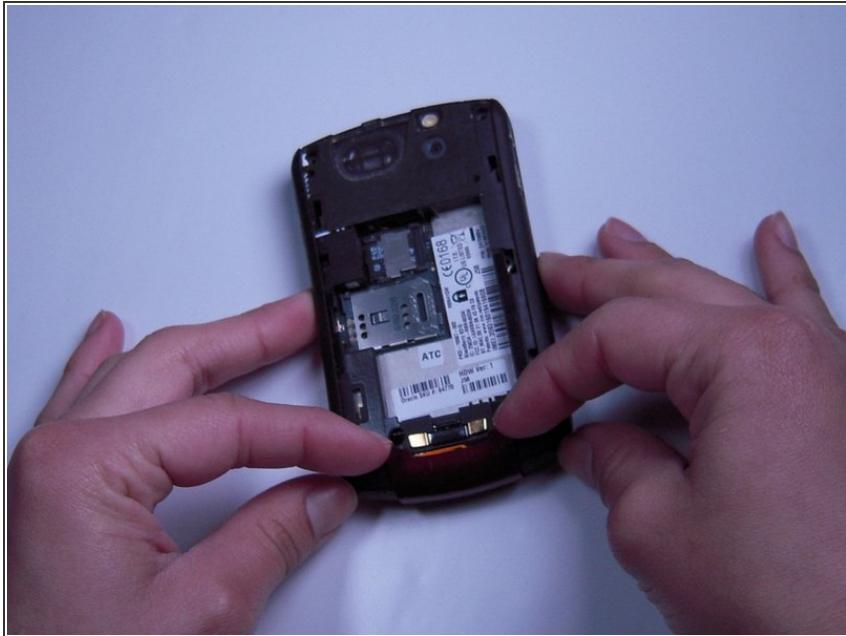

- Remove the red cover at the bottom of the phone.

*(i)* You may have to work a spudger underneath to release the plastic clips.

## Step 6



 Be careful not to damage the front cover's plastic clips while trying to separate it from the phone.

- Use a spudger to pry the front cover away from the side panels.
- Work the spudger around the entire phone until the front cover is free.

## Step 7 — Keyboard




- Remove the keyboard.

## Step 8 — Screen Housing




- Remove the four T6 Torx screws located on the corners of the keyboard frame.

## Step 9

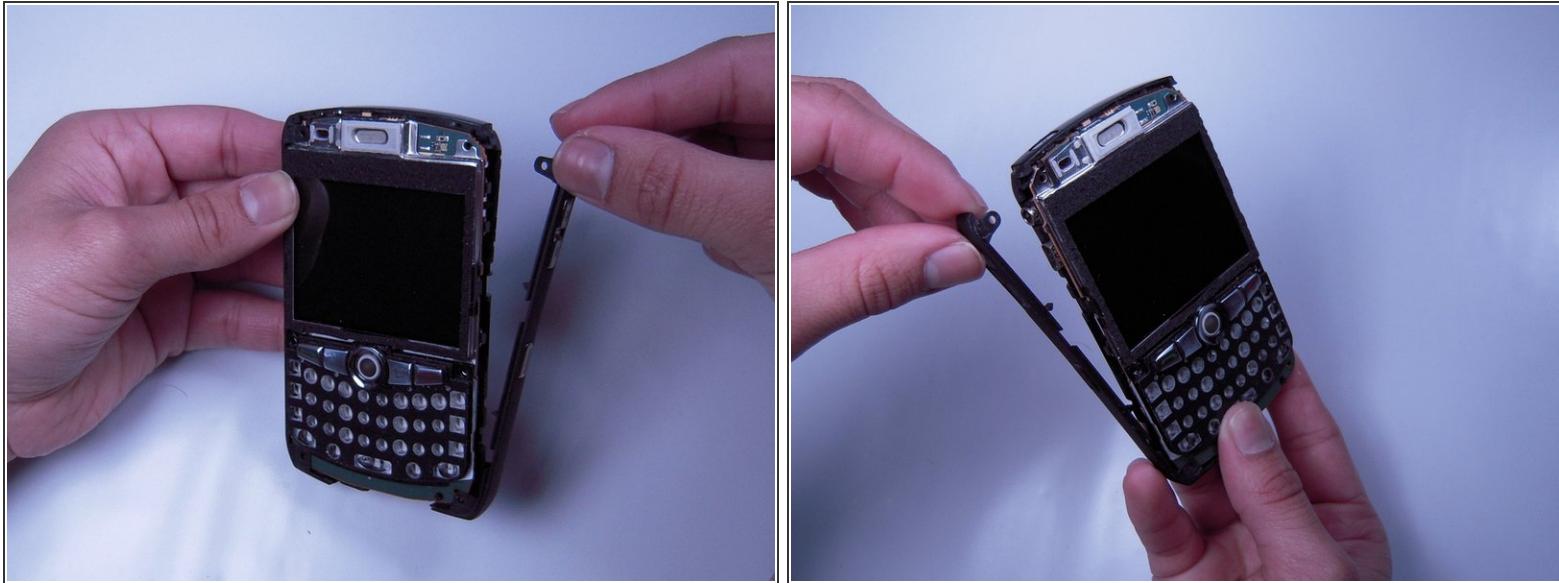

- Now remove the left and right side panels.

## Step 10

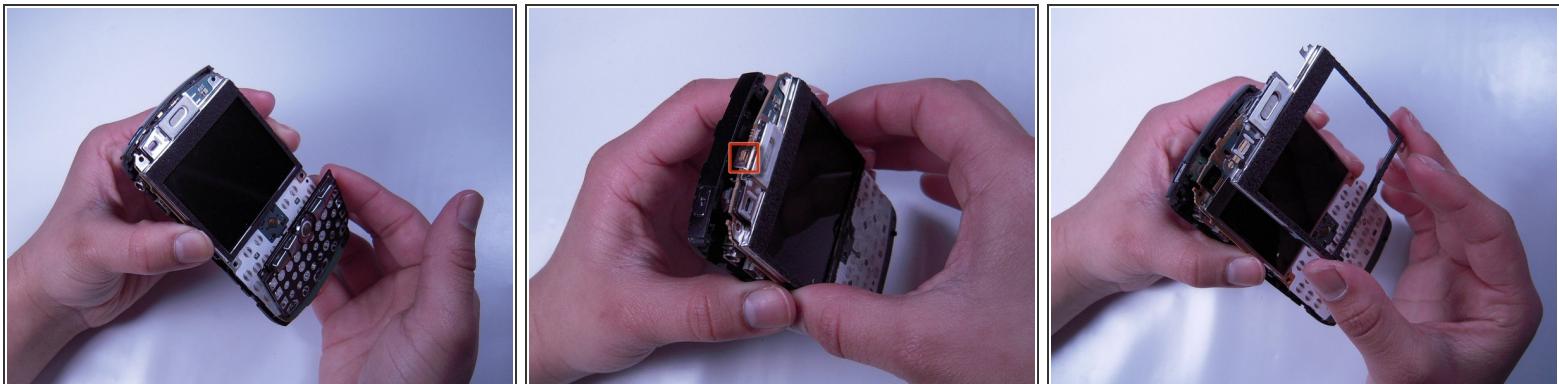

- Remove the keyboard frame.

**⚠** Be sure to unhook the screen housing from the motherboard before continuing. Refer to the square indicated in the second picture.

- Now remove the screen housing.

To reassemble your device, follow these instructions in reverse order.