




CONDOR 130I3E

CLEAN CPU FAN CONDOR 130I3E!Clean the cooling fan

Written By: AMOUR nasreddine

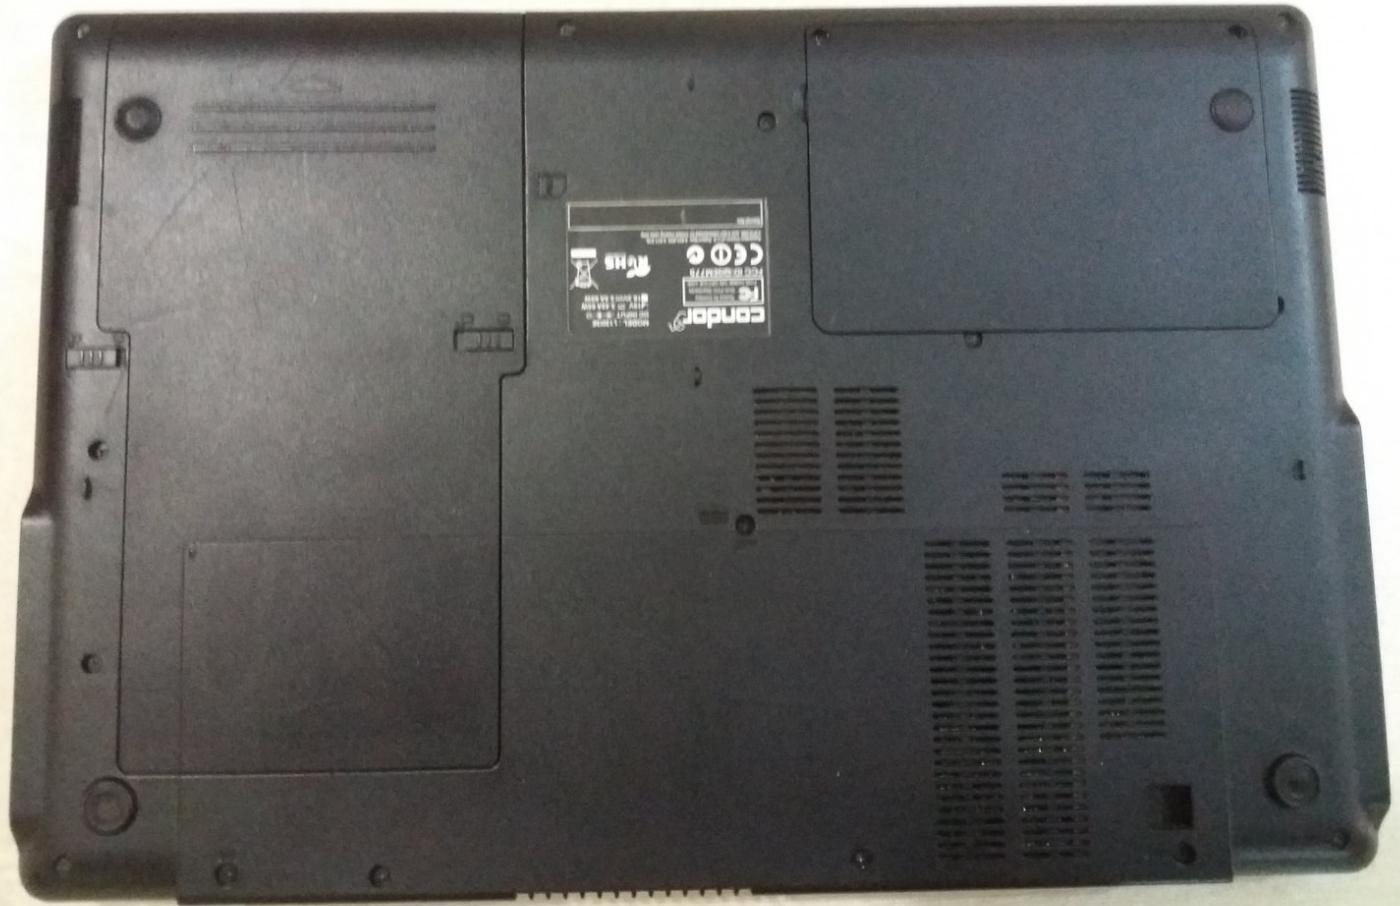

INTRODUCTION

In this lesson we will discuss how to disassemble this computer and clean its cooling fan from dust and sediment

Step 1 — CONDOR 130I3E



- First of all, make sure your device is switched off and unplugged
- Remove the battery by pulling the two screws in the direction indicated by the pins
- We pull the battery up

Step 2



- To remove the hard drive, unplug its screws in this cover
- Pull the hard drive in the direction indicated to remove it
- Then we remove the hard drive from its place with ease

Step 3



- To access the motherboard, you must first remove the keyboard because underneath it screws should be removed to separate the base of the chassis from the top of the keyboard
- With a flat screwdriver we remove the keyboard by pressing the red-pointed component and pushing the keyboard up to release it

Step 4



- We are now removing the keyboard connector to the motherboard
- Keyboard removed successfully

Step 5



- Remove the top cover and remove the processor cooling fan
- Screw the screws indicated in red to remove the cooling fan
- The fan was successfully removed

Step 6



- We now clean and remove the dust and sediments that hinder fan function and increase processor heat

To re-install the computer follow the same disassembly steps but vice versa