


**COIN COLLECTORS — PREPAY**  
**166C, D, G, H**  
**COMMON BATTERY — CONNECTIONS**

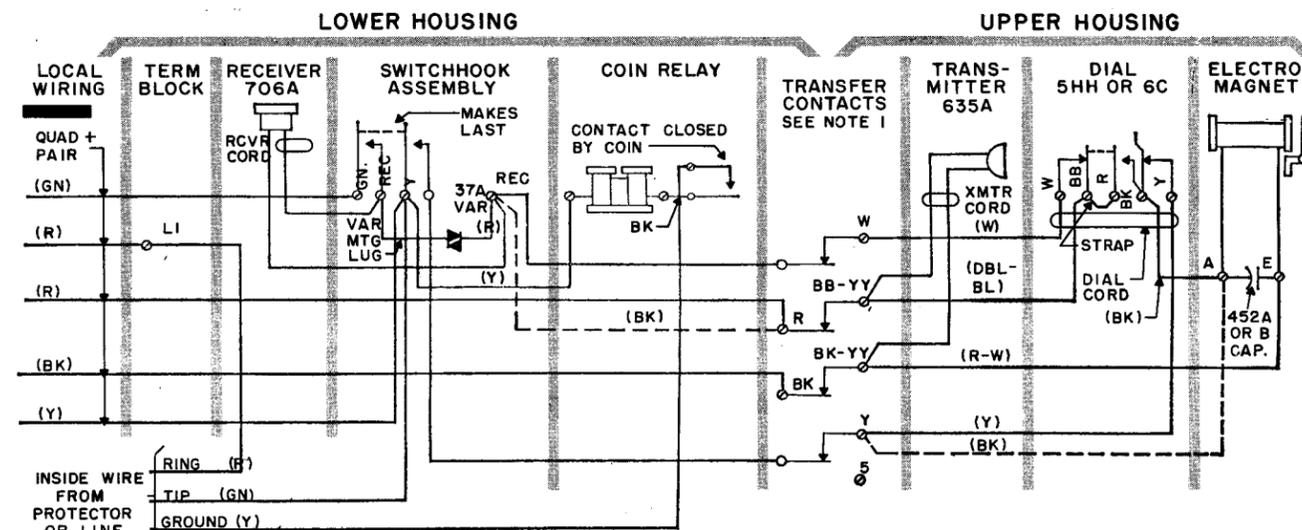

SEE NOTES ON FACING PAGE


Fig. 1 — Circuit Diagram for Use with 634A, BA, and BC and 684A, BA, and BC Induction Coil Type Subscriber Sets

Note 1: In some upper housings, terminals may be designated W, BB, YY, Y, and BK-YY, respectively. Terminal 5 is not always furnished.

Note 2: Dotted lines in diagram show manual set connections.

Note 3: When a 61R filter is required for radio frequency suppression, move yellow dial lead from Y upper-housing contact spring to filter bracket terminal and connect filter leads as follows:

- Yellow lead to filter bracket terminal.
- Black lead to A terminal on chute.
- Red lead to Y upper-housing contact.

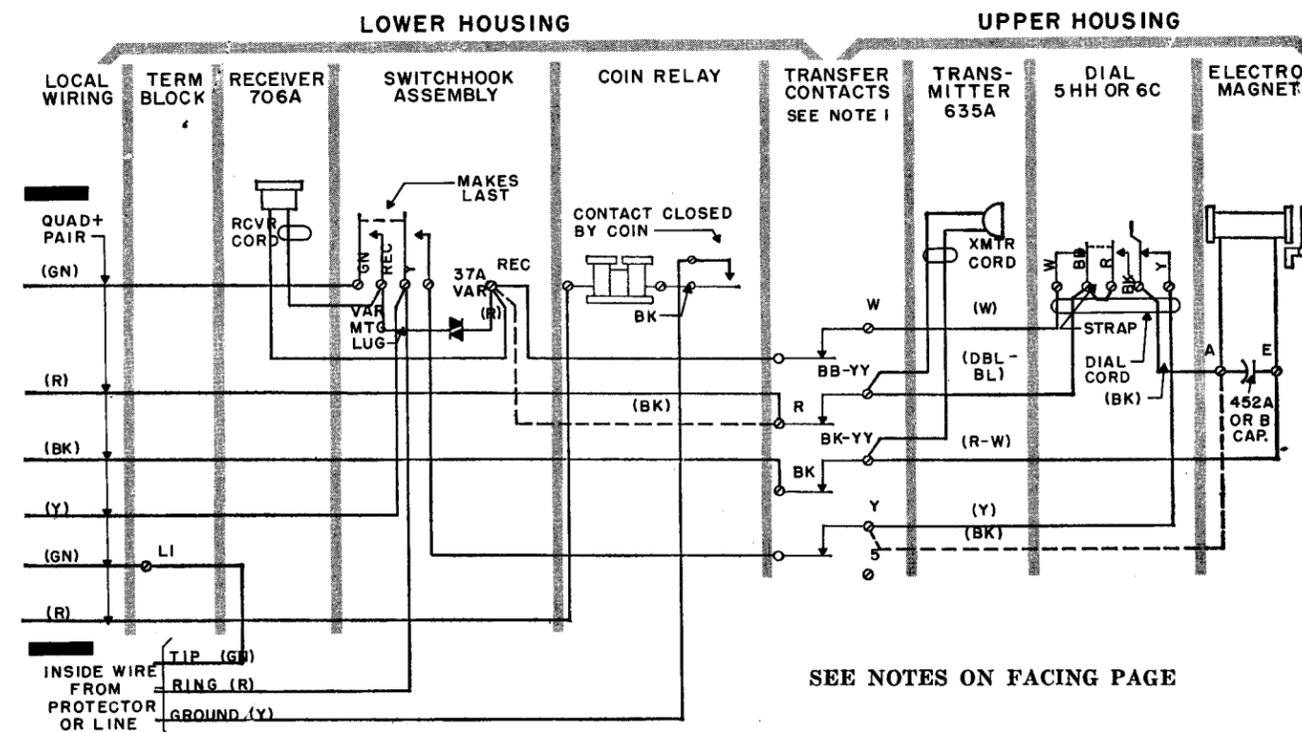

SEE NOTES ON FACING PAGE

Fig. 2 — Circuit Diagram for Use with 634CG and CH (Long Loops); 634CK, CL; and 684CK, CL (Inductive Noise Reduction) Induction Coil Type Subscriber Sets