

KS-19340 BOOTH (INDOOR) IDENTIFICATION

1. GENERAL

1.01 This section is reissued to:

- Change signs
- Revise text and tables

Since this reissue covers a general revision, arrows ordinarily used to indicate changes have been omitted.

1.02 The KS-19340 booth (Fig. 1) is a wooden telephone booth, designed for indoor use only, for sit-down or stand-up service, and for single or multiple installation.

2. IDENTIFICATION

2.01 The overall dimensions of the booth are:

- Height—83-1/8 inches
- Width—30-3/8 inches
- Depth—30-1/2 inches (front sign projects 1-1/2 inches beyond this dimension)

2.02 This wooden booth is available in a variety of materials and finishes. List Nos. have been assigned the basic booth and panels as described in Table A.



All list numbers in Table A which are required must be specified on the order.

2.03 The interior of the booth consists of:

- Mottled gray porcelain enameled steel linings
- Wood ceiling
- Charcoal gray fiberglass shelf
- Charcoal gray fiberglass seat (if required)
- Dark gray rubber covered floor
- Translucent white plastic lighted dome

2.04 The door consists of two vertical sections, each containing a full length glass panel. It folds inside the booth along the right wall when opened.



Fig. 1—KS-19340 Booth

TABLE A
BASIC ITEMS

KS-19340 LIST NO. OF BOOTH		FINISH	MATERIAL	KS-19340 LIST NO. OF MATCHING PARTS		
SIT-DOWN	STAND-UP			SIDE PANEL	BACK PANEL	SEPARATOR*
1	11	None	Birch	21	31	41
2	12	Birch	Birch	22	32	42
3	13	None	Oak	23	33	43
4	14	Oak	Birch	24	34	44
5	15	Walnut	Birch	25	35	45
6	16	Mahogany	Birch	26	36	46

* The separators are for use when booths are installed in multiples; one separator is required for two booths. A separator may be substituted for a finished end panel when the end of the booth is not exposed.

2.05 A translucent sign, with the Bell System Emblem and the word phone, is mounted over the door in a dull black steel frame which projects 1-1/2 inches beyond the front of the booth. Table B lists the front signs available.

2.06 An air intake opening is provided through the top side of the front sign assembly.

2.07 The booth is illuminated and ventilated by a KS-19207, List 1 light and blower unit (see Section 508-820-100). This light unit also illuminates the front sign.

2.08 A wall switch assembly (S. P. Rockette No. 8911K234, Cutler-Hammer Inc.) for the customer to turn the blower on and off at will, is located in the right-rear corner above the coin collector/telephone. This switch is operated in conjunction with the door operated switch assembly (B-560059).

2.09 The lamp is wired for continuous illumination unless otherwise specified; however, it may be wired for operation with the door switch assembly (see Section 508-820-100).

2.10 Power for light and blower is supplied by means of a KS-19425, List 22 cable assembly.

This cable is furnished as part of the booth for plugging into a 118-volt ac power-service outlet. Where local regulations permit, a power-cord plug retainer and cord clamp may be used to prevent accidental removal of cable assembly from power service outlet.

2.11 The booth is designed to mount a variety of coin telephone sets by using the appropriate backboard and mounting kit. See Table C.

2.12 A 3-wire convenience outlet and 42A connecting block are located in the ceiling area.

2.13 A KS-19928, List 1 card frame may be used with this booth (see Section 508-811-100). The card frame is not furnished and must be ordered separately.

2.14 A KS-19340, List 56 sign control assembly (Fig. 3) is available for controlling illuminated signs other than those on front of booth. The sign control assembly is not furnished and must be ordered separately. See Section 508-111-200 for additional information on this assembly.

TABLE B
SIGNS AND SIGN ASSEMBLIES

KS-19340 LIST NO.	DESCRIPTION	CONSIST OF KS-19340, LIST NO.		REMARKS
58	Sign Assembly	63	66	†
59		64		
60		62		
61		65		
62	Sign Panel			White Background, Blue Letters
63				White Blank
64*				Blue Background, White Letters
65				Blue Blank
66	Frame Assembly			Dull Black Finish

* List 64 sign panel will be furnished with each booth unless otherwise specified.

† When the old type front signs (Lists 51 and 52) are replaced on an existing booth, it will be necessary to order a List 58, 59, 60, or 61 sign assembly which includes the List 66 frame. A List 62, 63, 64, or 65 sign shall be ordered only where a List 66 frame already exists.

TABLE C
BACKBOARDS AND MOUNTINGS

KS-19340 LIST NO.	DESCRIPTION	REMARKS
53*	Backboard	For all telephone sets except 2A- and 235-type (see Section 506-110-105).
54	Backboard	For 2A- and 235-type coin telephones (see Section 506-110-105). Must be specified on order if required.
55	Mounting Kit	For mounting a subscriber set (see Fig. 2). Must be specified on order if required.

* List 53 backboard will be furnished with each booth unless otherwise specified.

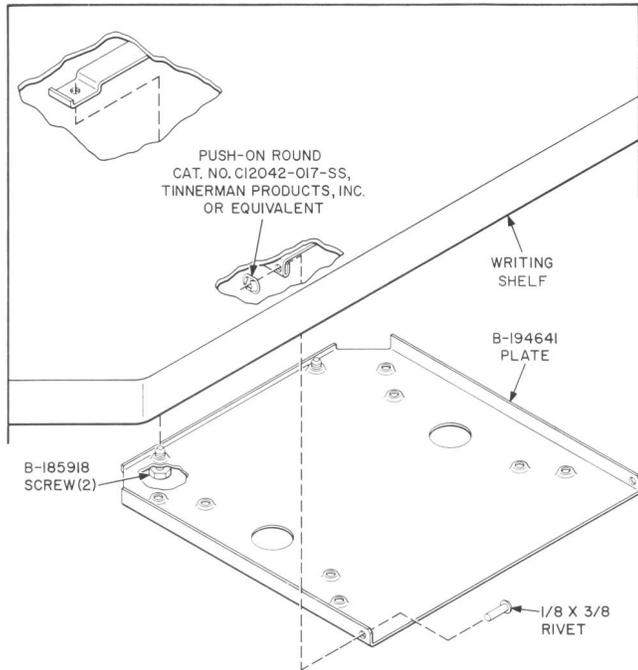


Fig. 2—Subscriber Set Mounting Kit



Fig. 3—KS-19340, List 56 Sign Control Assembly

3. ORDERING INFORMATION

3.01 Orders for the booth shall specify the quantity, KS numbers, and list numbers, including those items that must be ordered separately. The desired locations of the panels and separators must be specified on the order.

3.02 The following are examples of typical orders.

Example 1

1 Booth, Telephone, KS-19340, List 11, Equipped With:

- 2 Panels, End, KS-19340, List 21
- 1 Panel, Back, KS-19340, List 31
- 1 Kit, mounting, Coin Collector, KS-19340, List 55

Example 2

2 Booths, Telephone, KS-19340, List 2, Equipped With:

- 2 Panels, End, KS-19340, List 22
- 2 Panels, Back, KS-19340, List 32
- 1 Separator, KS-19340, List 42
- 2 Backboards, KS-19340, List 54
- 2 Sign Control Assemblies, KS-19340, List 56
- 2 Telephone Signs, KS-19340, List 62
- 2 Card Frames, KS-19928, List 1