




# Dell Inspiron 13 7368 Memory Modules Replacement

Written By: Terrence15

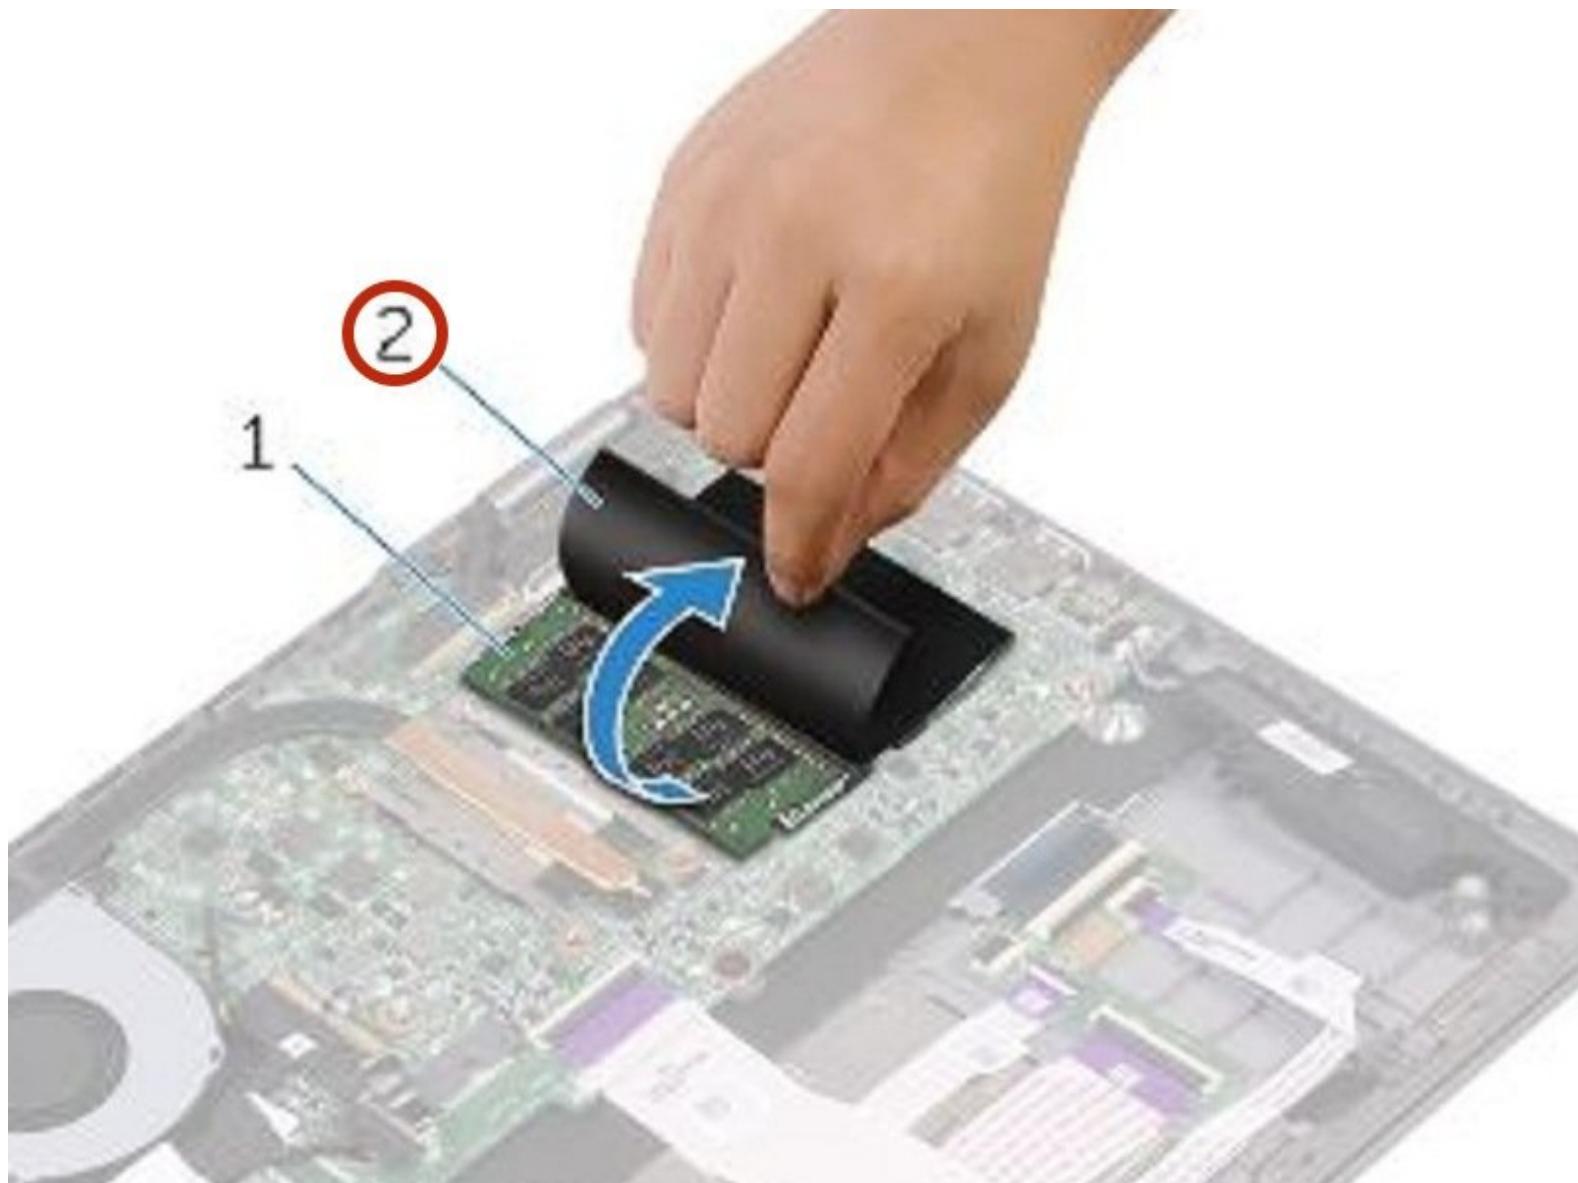


## INTRODUCTION

In this guide, we will show you how to remove and replace the Memory Modules.

### TOOLS:

- **Phillips #0 Screwdriver** (1)
- **Spudger** (1)


## Step 1 — Disconnecting the Battery Cable

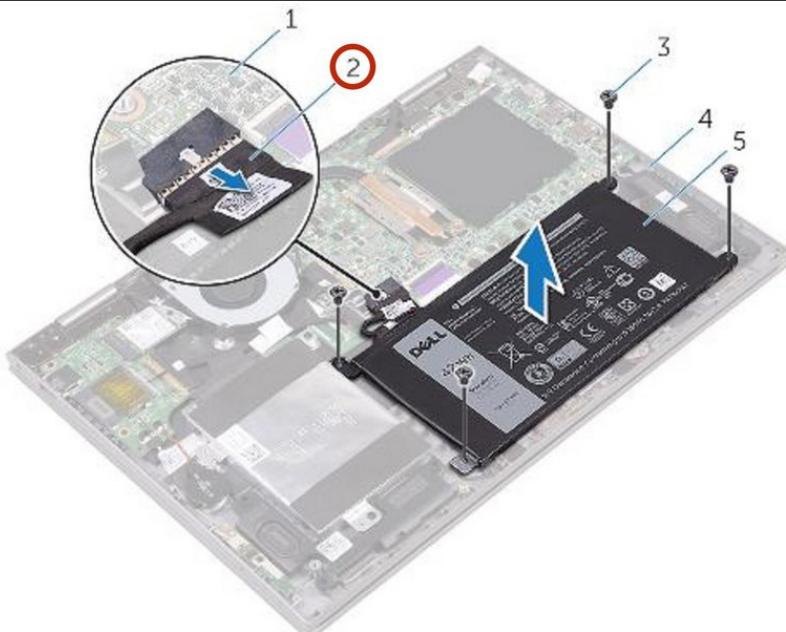

⚠️ **WARNING:** Before working inside your computer, read the safety information that shipped with your computer and follow the steps in [Before Working Inside Your Computer](#). After working inside your computer, follow the instructions in [After Working Inside Your Computer](#).


- Disconnect the battery cable from the system board.

## Step 2 — Remove the Screws

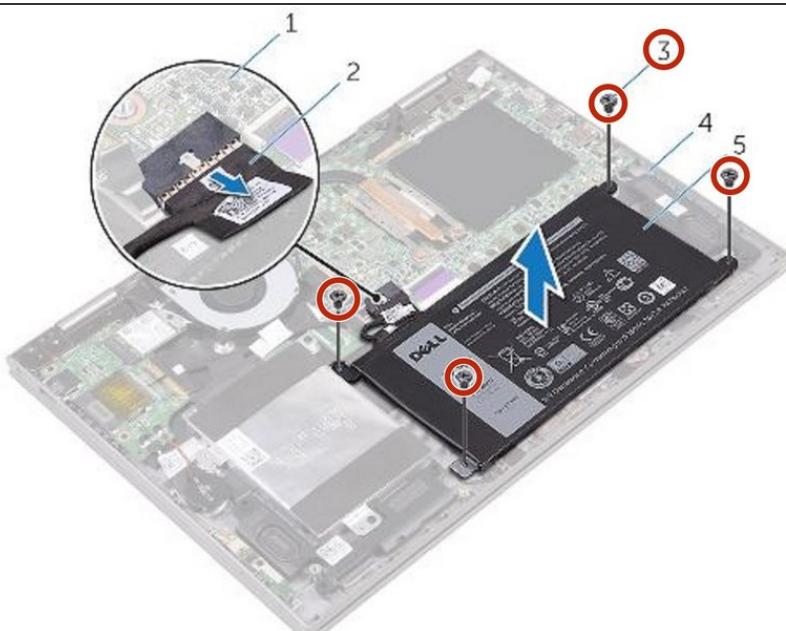

- Remove the screws that secure the battery to the palm-rest assembly.

## Step 3 — Lifting the Battery

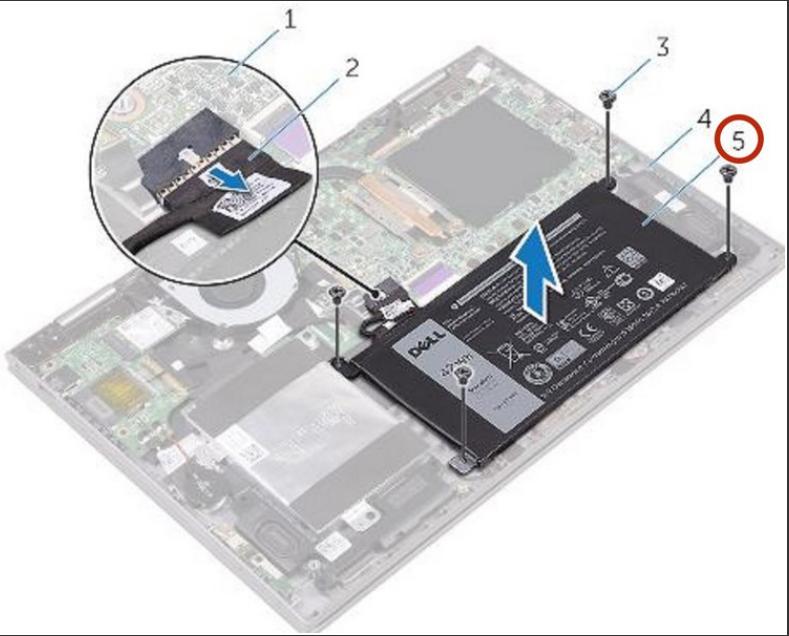


- Lift the battery off the palm-rest assembly.

## Step 4 — Grounding the System Board




- Press and hold the power button for five seconds to ground the system board.

## Step 5 — Align the Screw Holes

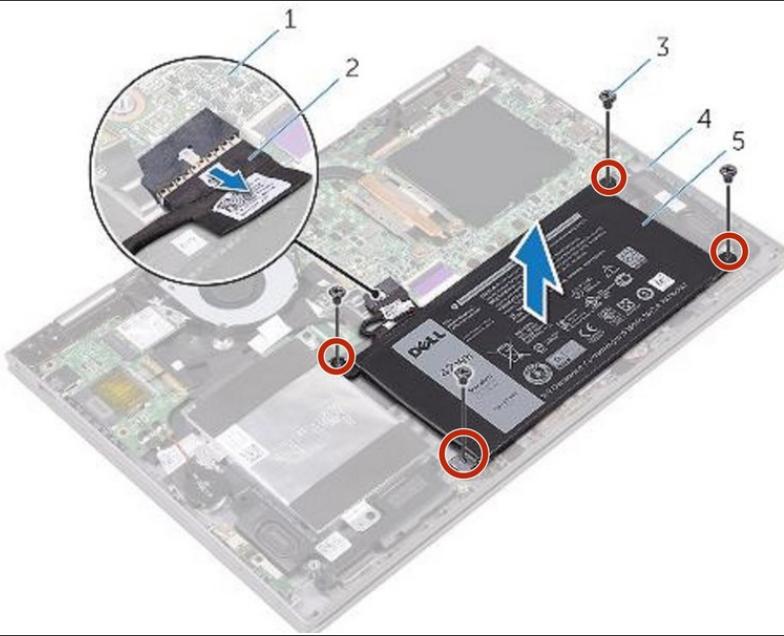


- Align the screw holes on the battery with the screw holes on the palm-rest assembly.

## Step 6 — Replace the Screws

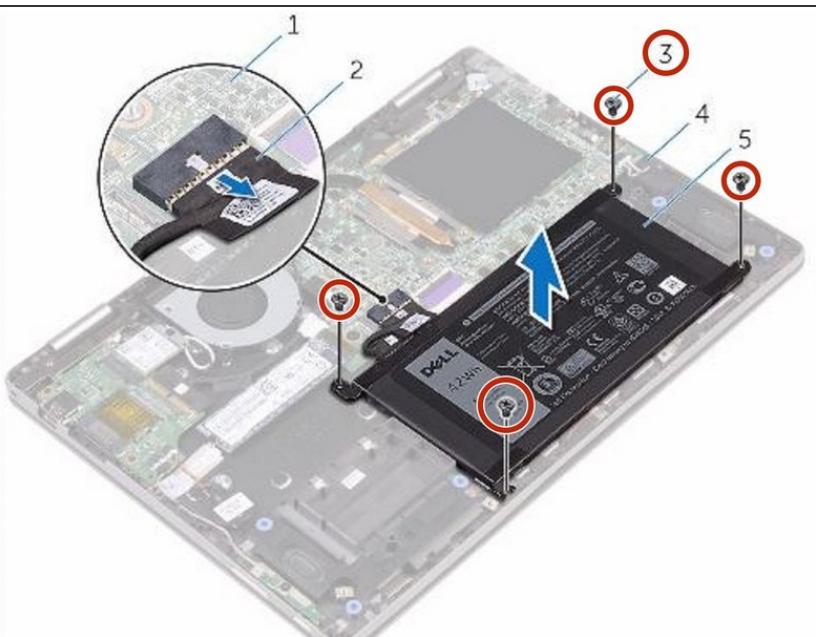


- Replace the screws that secure the battery to the palm-rest assembly.

## Step 7 — Connecting the Battery Cable

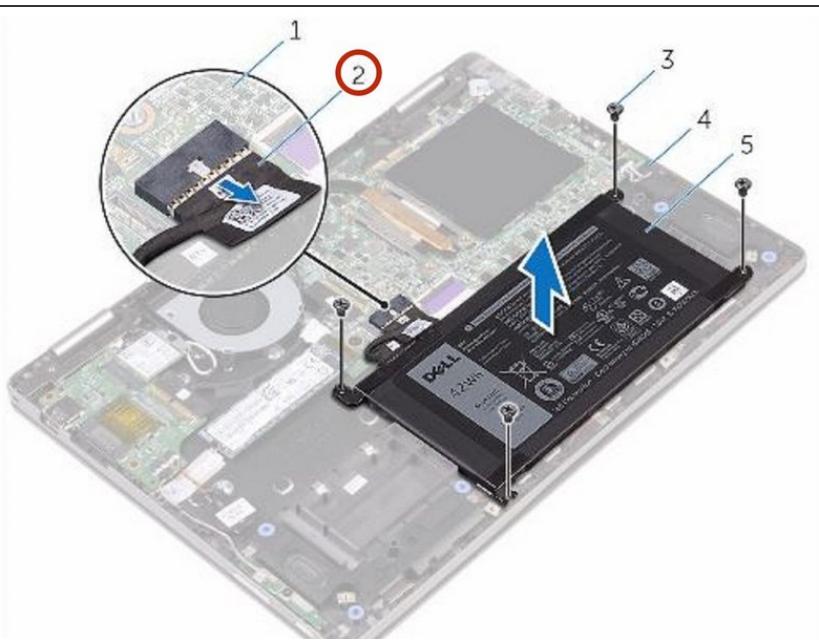

- Connect the battery cable to the system board.


## Step 8 — Lifting the Mylar

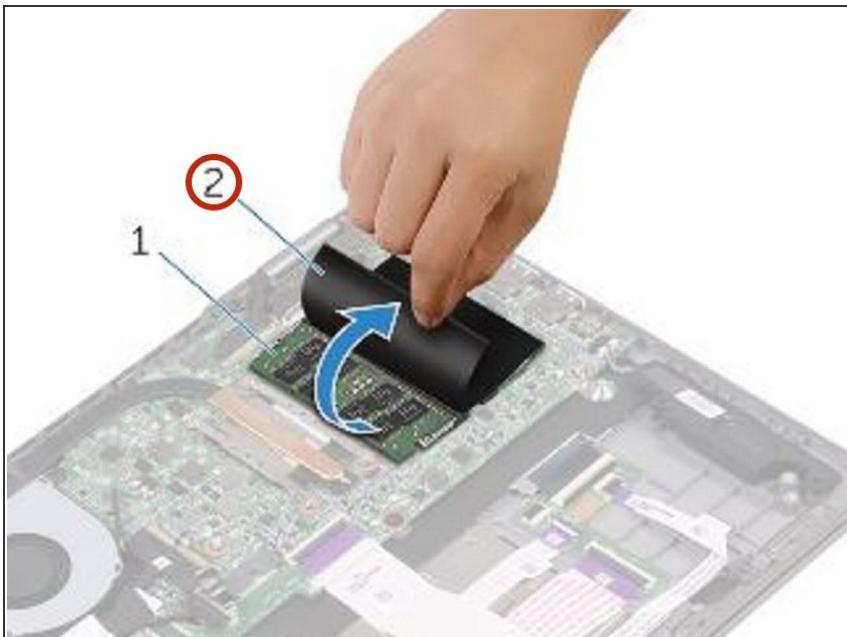

**⚠** **WARNING:** Before working inside your computer, read the safety information that shipped with your computer and follow the steps in [Before Working Inside Your Computer](#). After working inside your computer, follow the instructions in [After Working Inside Your Computer](#).


- Lift the Mylar to access the memory module.

## Step 9 — Popping up the Memory Module

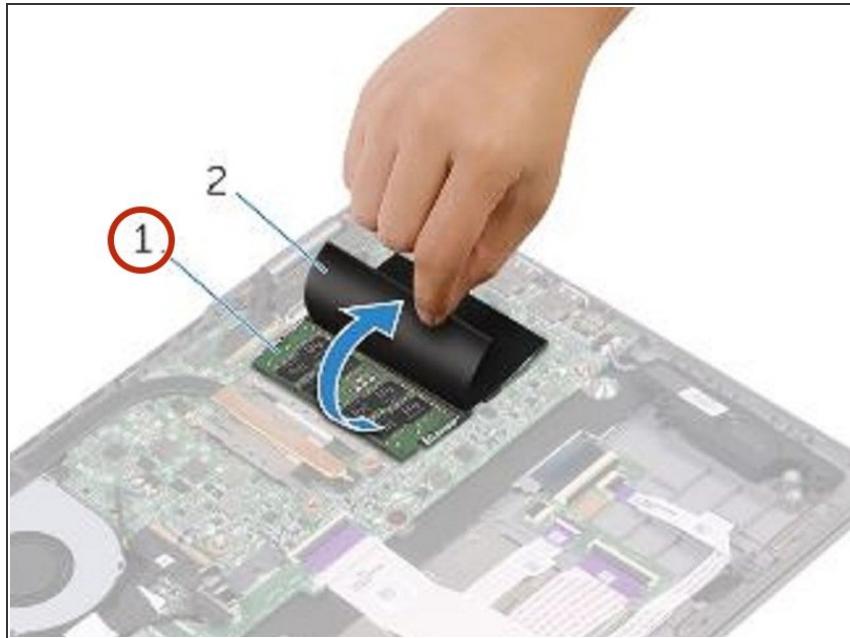


- Use your fingertips to carefully spread apart the securing-clips on each end of the memory-module slot until the memory module pops up.

## Step 10 — Removing the Memory Module

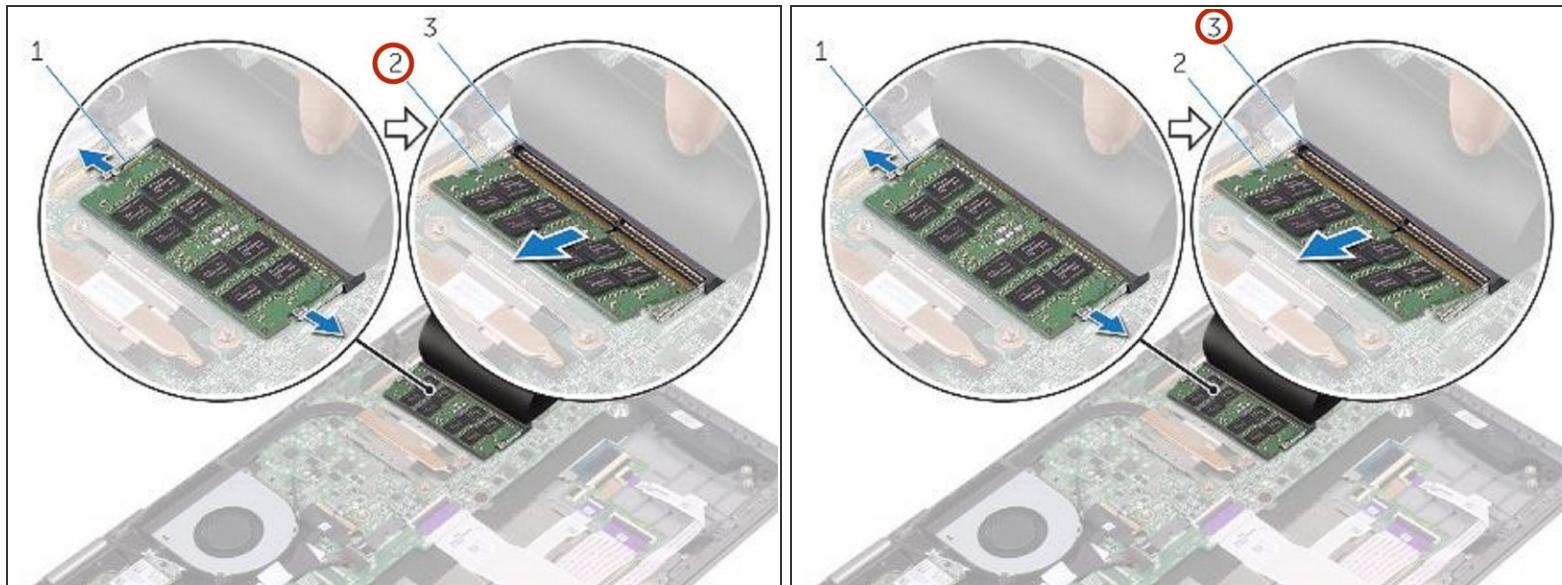


- Remove the memory module from the memory-module slot.

## Step 11 — Lifting the Mylar

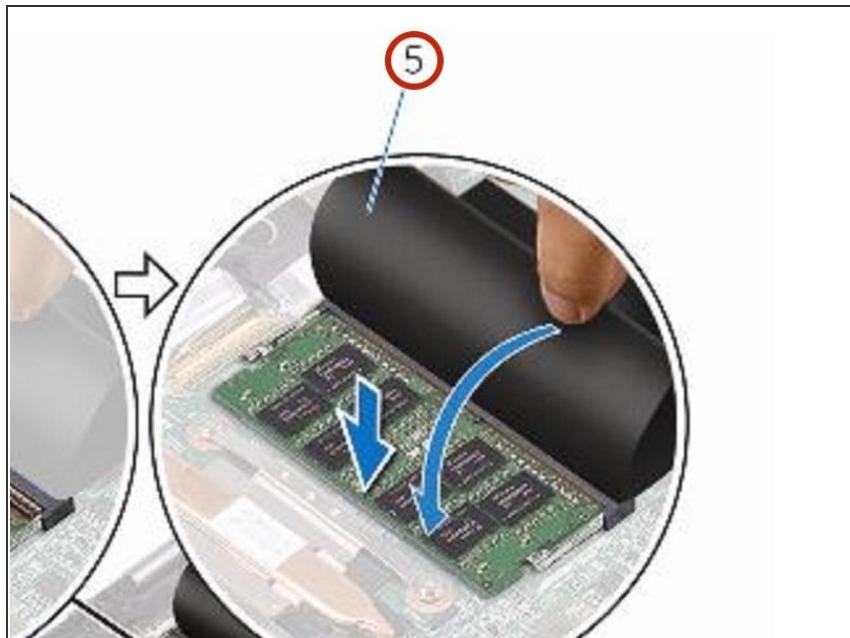


- Lift the Mylar to access the memory-module slot.

## Step 12 — Align the Notch

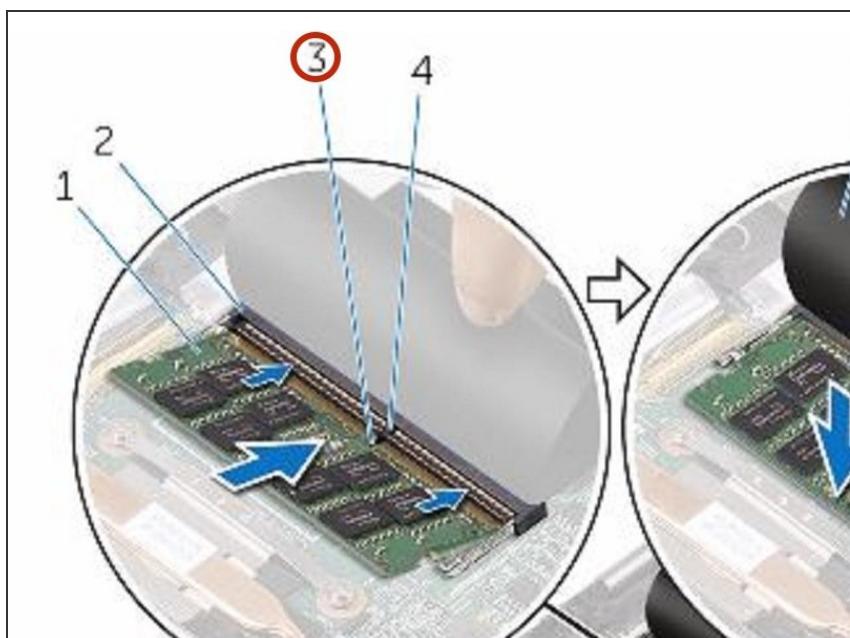

- Align the notch on the memory module with the tab on the memory-module slot.

## Step 13 — Sliding the Memory Module

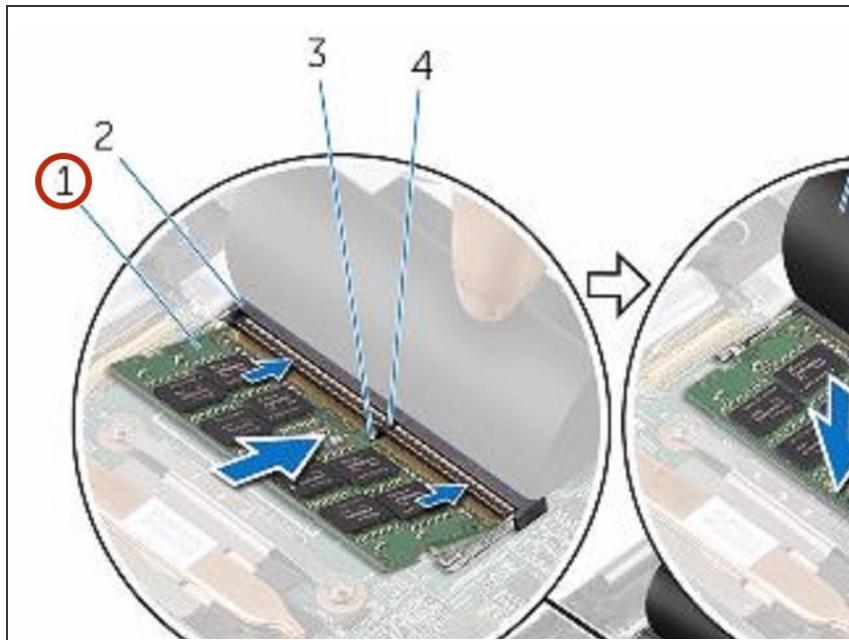

- Slide the memory module firmly into the slot at an angle and press the memory module down until it clicks into place.
- NOTE: If you do not hear the click, remove the memory module and reinstall it.