




Dell Inspiron 1318 Memory Module Replacement


Written By: Terrence15

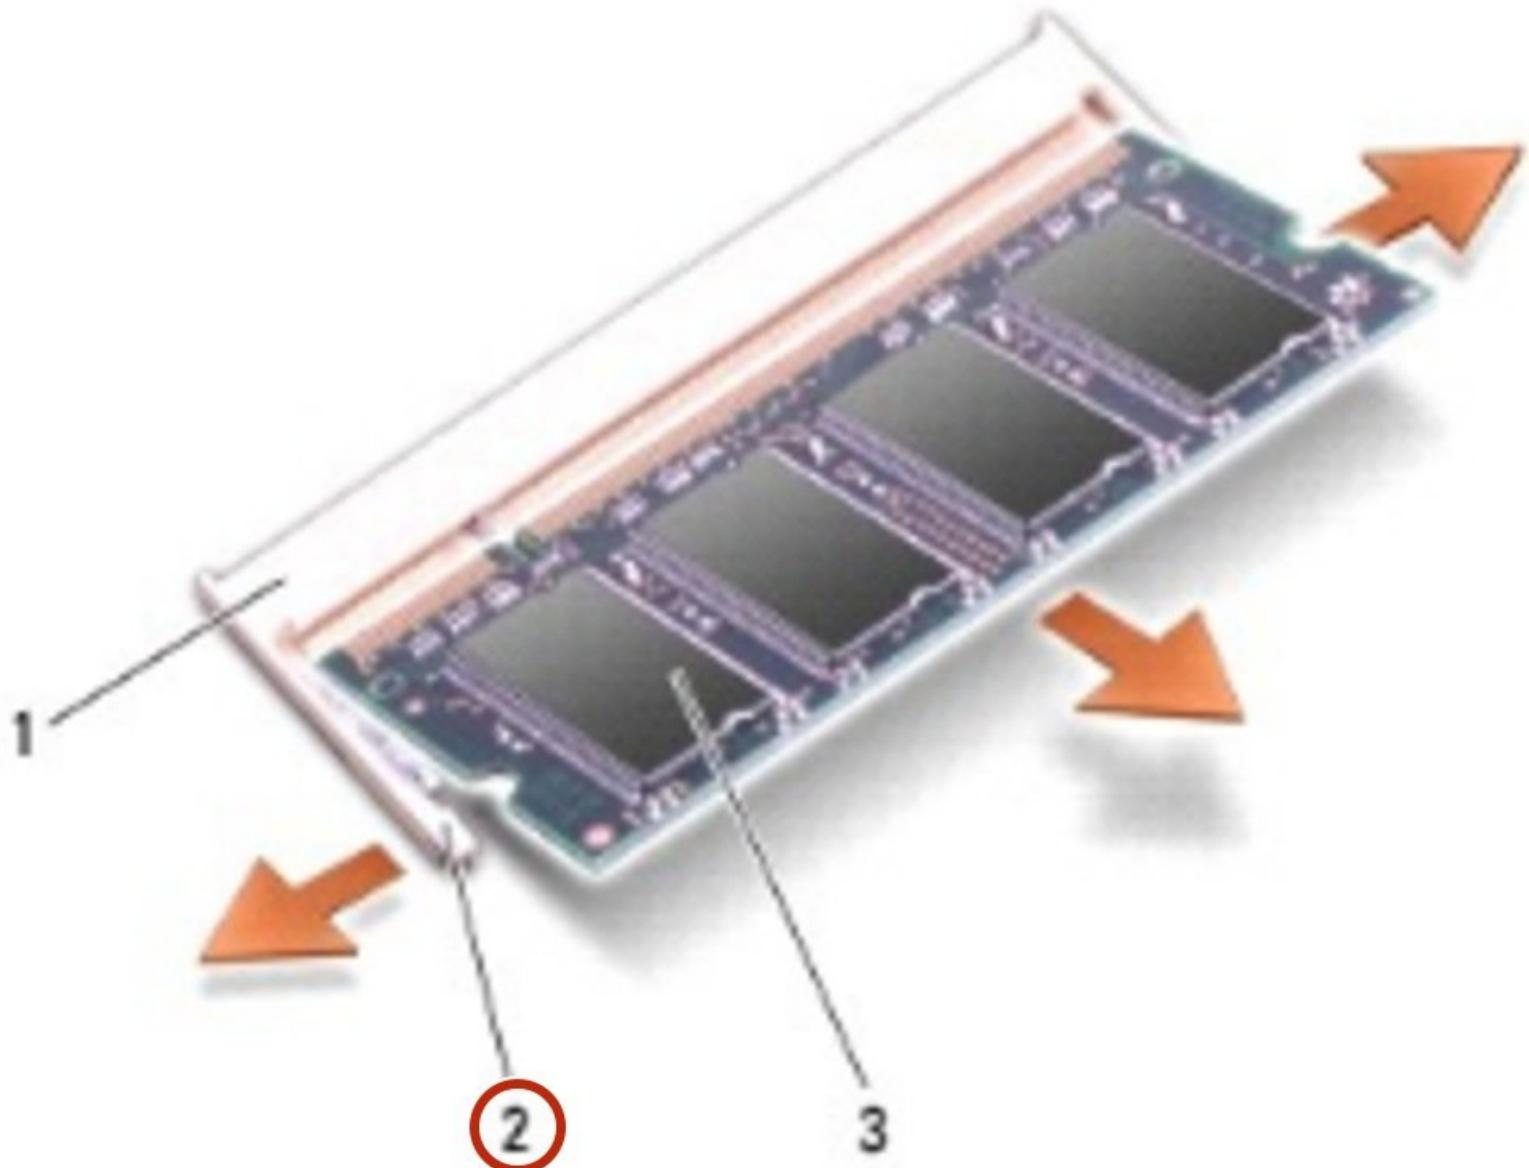

INTRODUCTION

In this guide, we will show you how to remove and replace the Memory Module.

Step 1 — Popping up the Memory Module

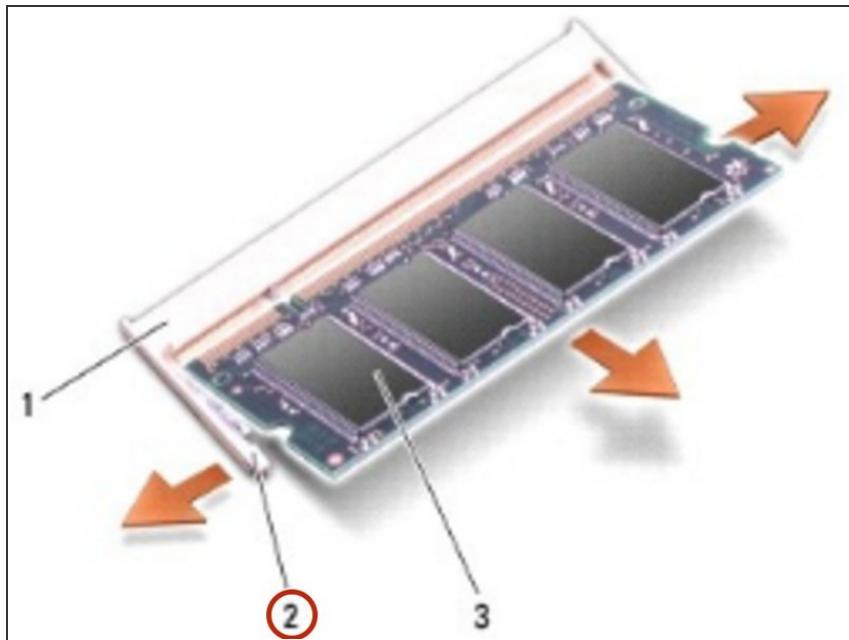


! Follow the procedures in [Before You Begin](#).

! **NOTICE:** To avoid electrostatic discharge, ground yourself by using a wrist grounding strap or by periodically touching an unpainted metal surface (such as a connector on the back of the computer).

! **NOTICE:** To prevent damage to the memory module connector, do not use tools to spread the memory module securing clips.


- Use your fingertips to carefully spread apart the securing clips on each end of the memory module connector until the module pops up.

Step 2 — Remove the Module

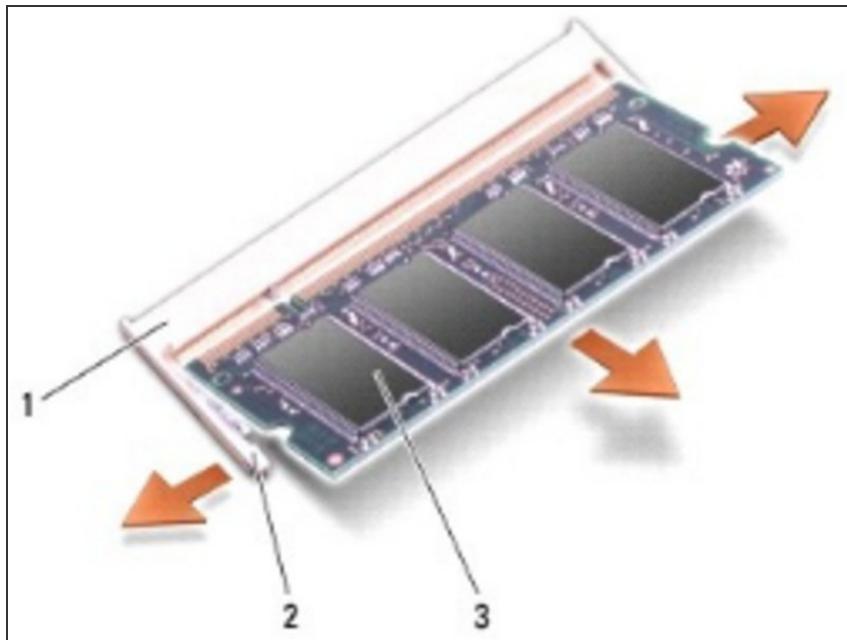


- Remove the module from the connector.

Step 3 — Align the Notch

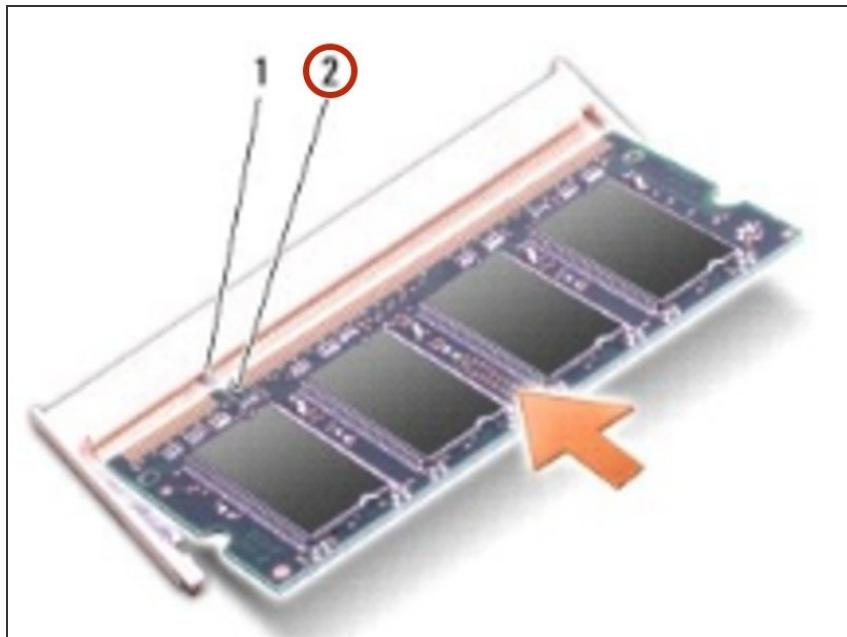

- Align the notch in the module edge connector with the tab in the connector slot.

Step 4 — Sliding the Module

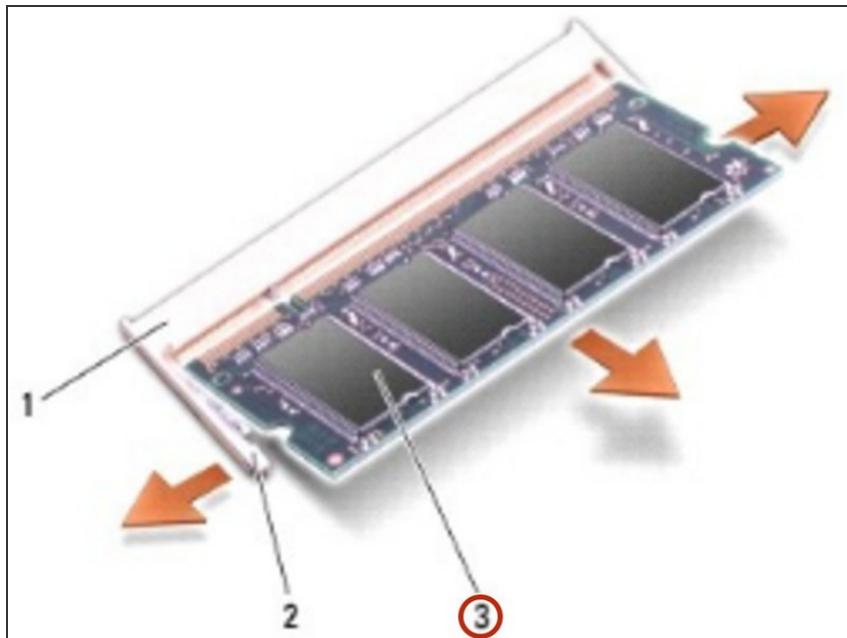

- Slide the module firmly into the slot at a 45-degree angle, and rotate the module down until it clicks into place. If the module does not click into place, remove the module and reinstall it.

- *NOTE:* If the memory module is not installed properly, the computer may not boot.