

BOOTHS – OUTDOOR INSTALLATION AND REMOVAL PROTECTION POSTS (WASHINGTON-IDAHO)

1. GENERAL

1.01 This appendix is issued to provide instructions for placing protection posts at outdoor booth installations and their disposition upon removal of the outdoor booths

2. DESCRIPTION

2.01 Outdoor booths placed at locations where the booth is subject to physical damage from moving vehicles shall be provided with CN-4643, L7 protection posts. The post consists of a 5 foot length of 3 inch iron pipe with cap.

2.02 The posts shall be installed as follows:


- (a) The post shall be imbedded in 2 feet of concrete. The concrete shall be at least 10 inches in diameter and extend 4 inches below the bottom of the post. (See Fig. 1)

- (b) Where protection posts are required, the number of posts and their locations should be such as to provide adequate protection to the booth.

- (c) The posts shall be painted with two (2) coats of Red Enamel.

- (d) The caps on the posts shall be painted with two (2) coats of White Enamel.

2.03 Normally, protection posts are left in at the time booth is removed. If the customer requests that we remove the protection posts, and we have no objections, a verbal agreement is sufficient authorization.

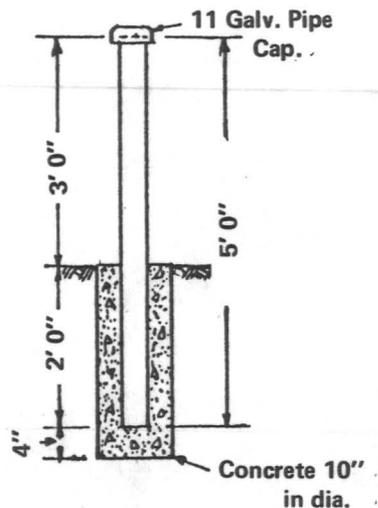

CN-4643, L7 Protection Post
Fig. 1