



# Dell Inspiron 1425 Display Assembly Replacement

Written By: Terrence15



## INTRODUCTION

In this guide, we will be showing you how to remove and replace the Display Assembly.

### TOOLS:

- Phillips #0 Screwdriver (1)

## Step 1 — Remove the Screws




**⚠️** **WARNING:** Before working inside your computer, read the safety information that shipped with your computer. Follow the instructions in ["Before You Begin"](#).

**⚠️** **CAUTION:** To avoid electrostatic discharge, ground yourself by using a wrist grounding strap or by periodically touching an unpainted metal surface (such as a connector on your computer).


- Remove the two screws from the computer base.

## Step 2 — Loosen the Cable

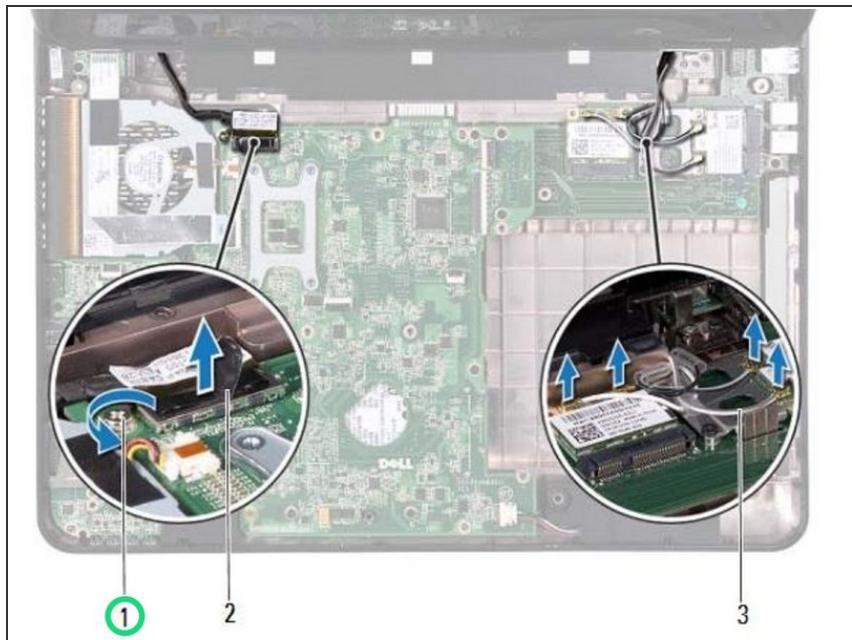


- Loosen the display cable grounding screw.

## Step 3 — Disconnecting the Display Cable

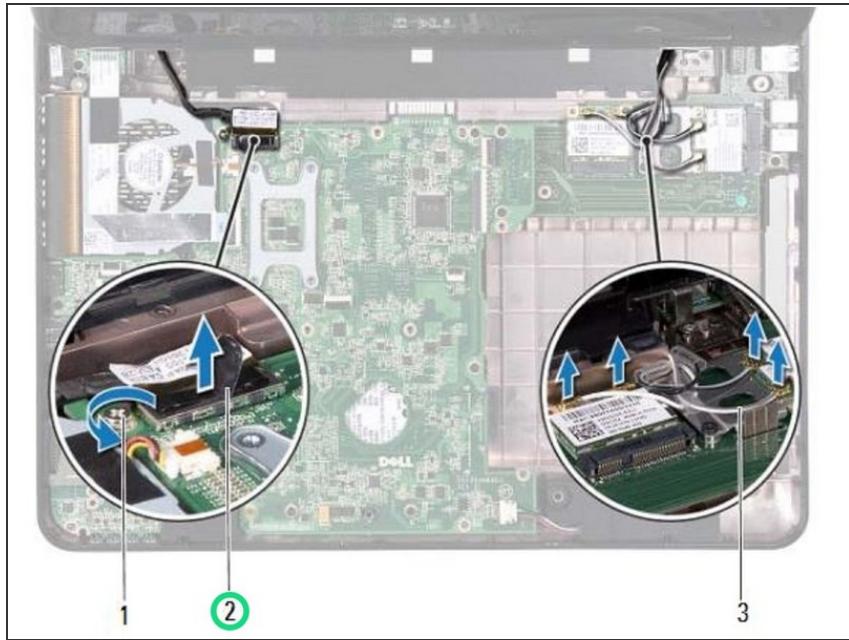

- Disconnect the display cable from the connector on the system board.

## Step 4 — Remove the Screws

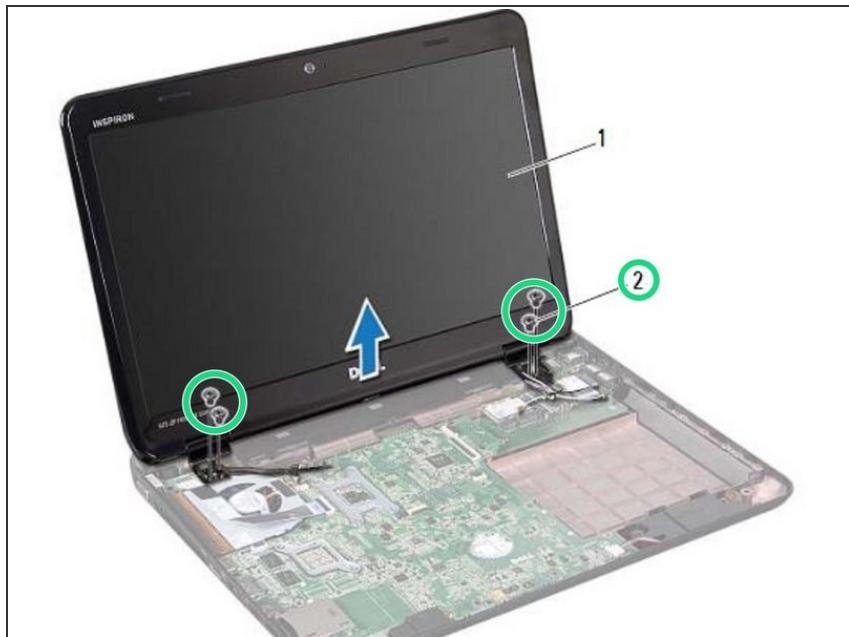


- Remove the four screws that secure the display assembly to the computer base.

## Step 5 — Removing the Display Assembly




- Lift the display assembly off the computer base.

## Step 6 — Placing the Display Assembly

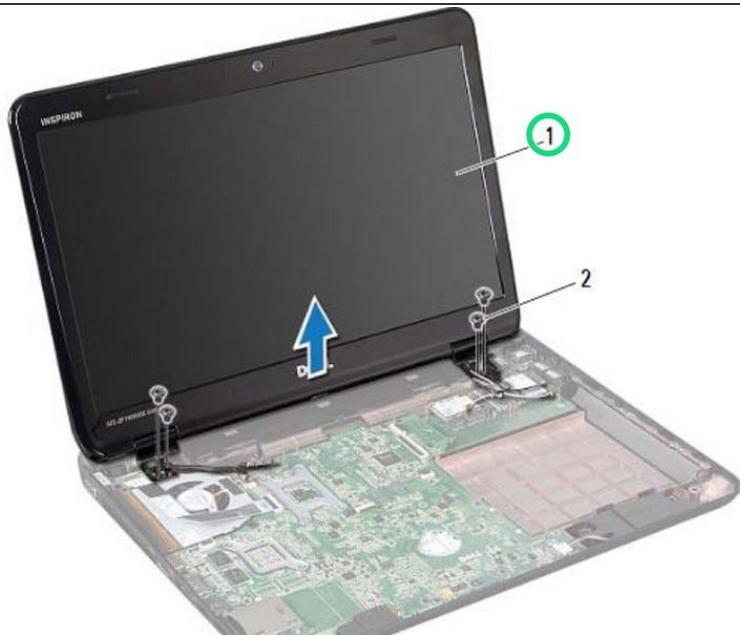


- Place the **NEW** display assembly in position and replace the four screws that secure the display assembly to the computer base.

## Step 7 — Routing the Cables

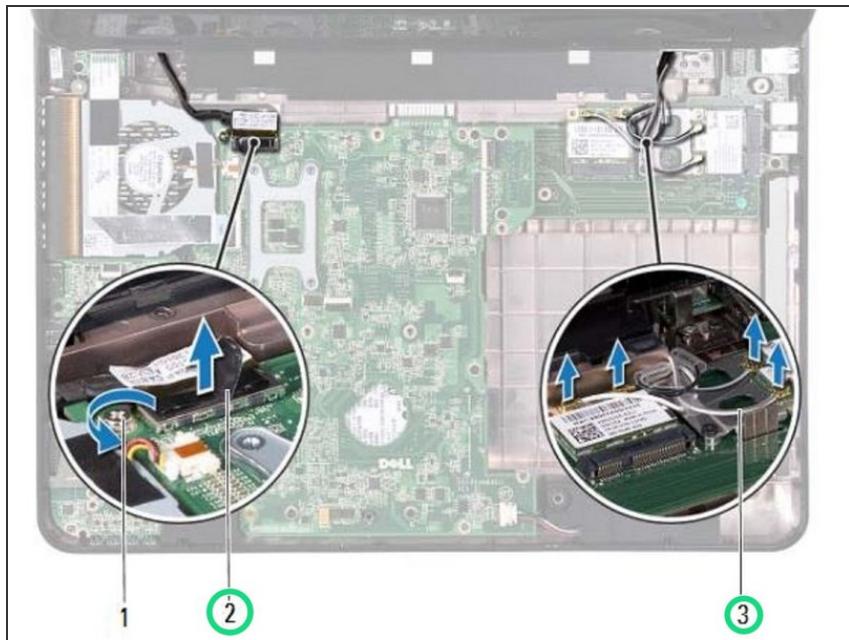


- Route the display cable and Mini-Card antenna cables through the routing guides.

## Step 8 — Connecting the Display Cable

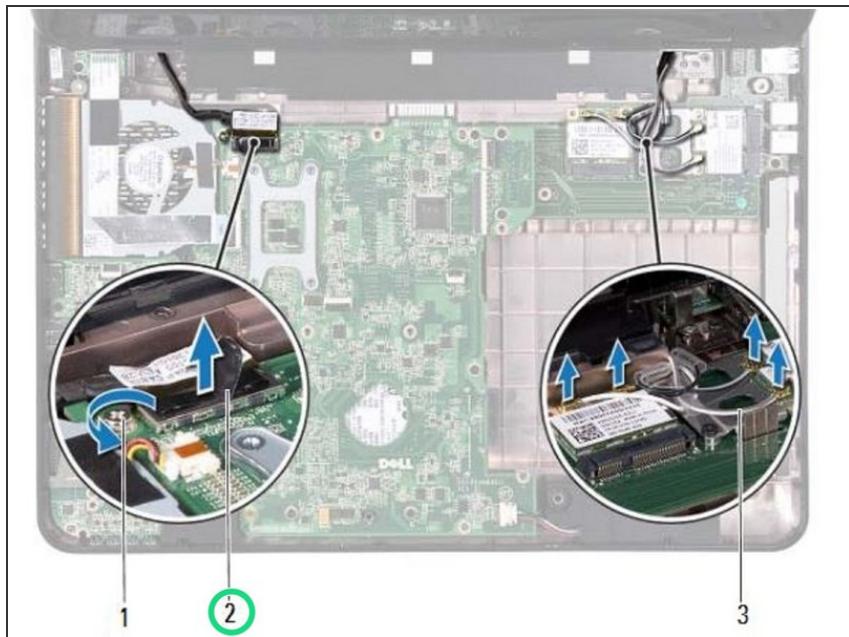

- Connect the display cable to the connector on the system board.

## Step 9 — Tighten the Cable Screw

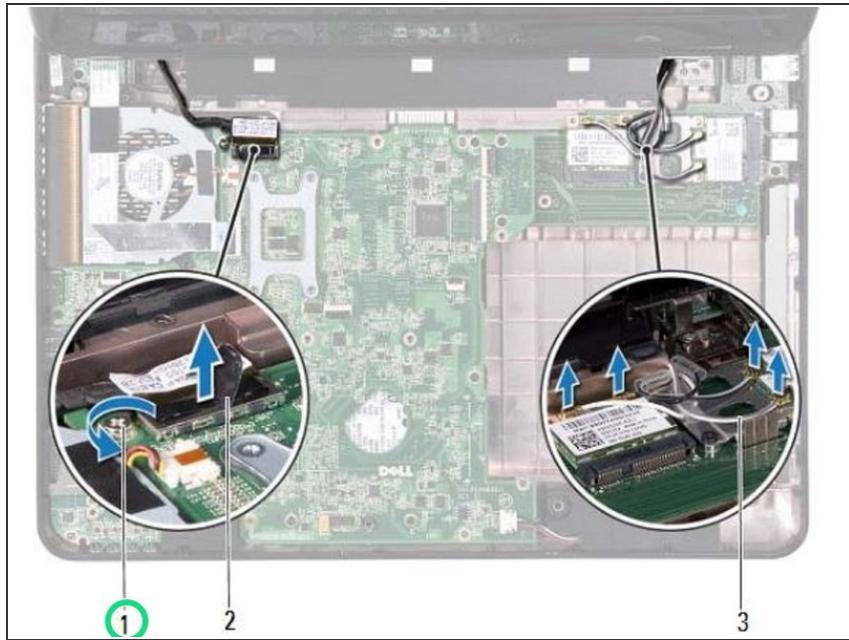

- Tighten the display cable grounding screw.

## Step 10 — Replace the Screws



- Replace the two screws at the bottom of the computer.