




# Dell Inspiron N4010 Display Assembly Replacement

Written By: Terrence15

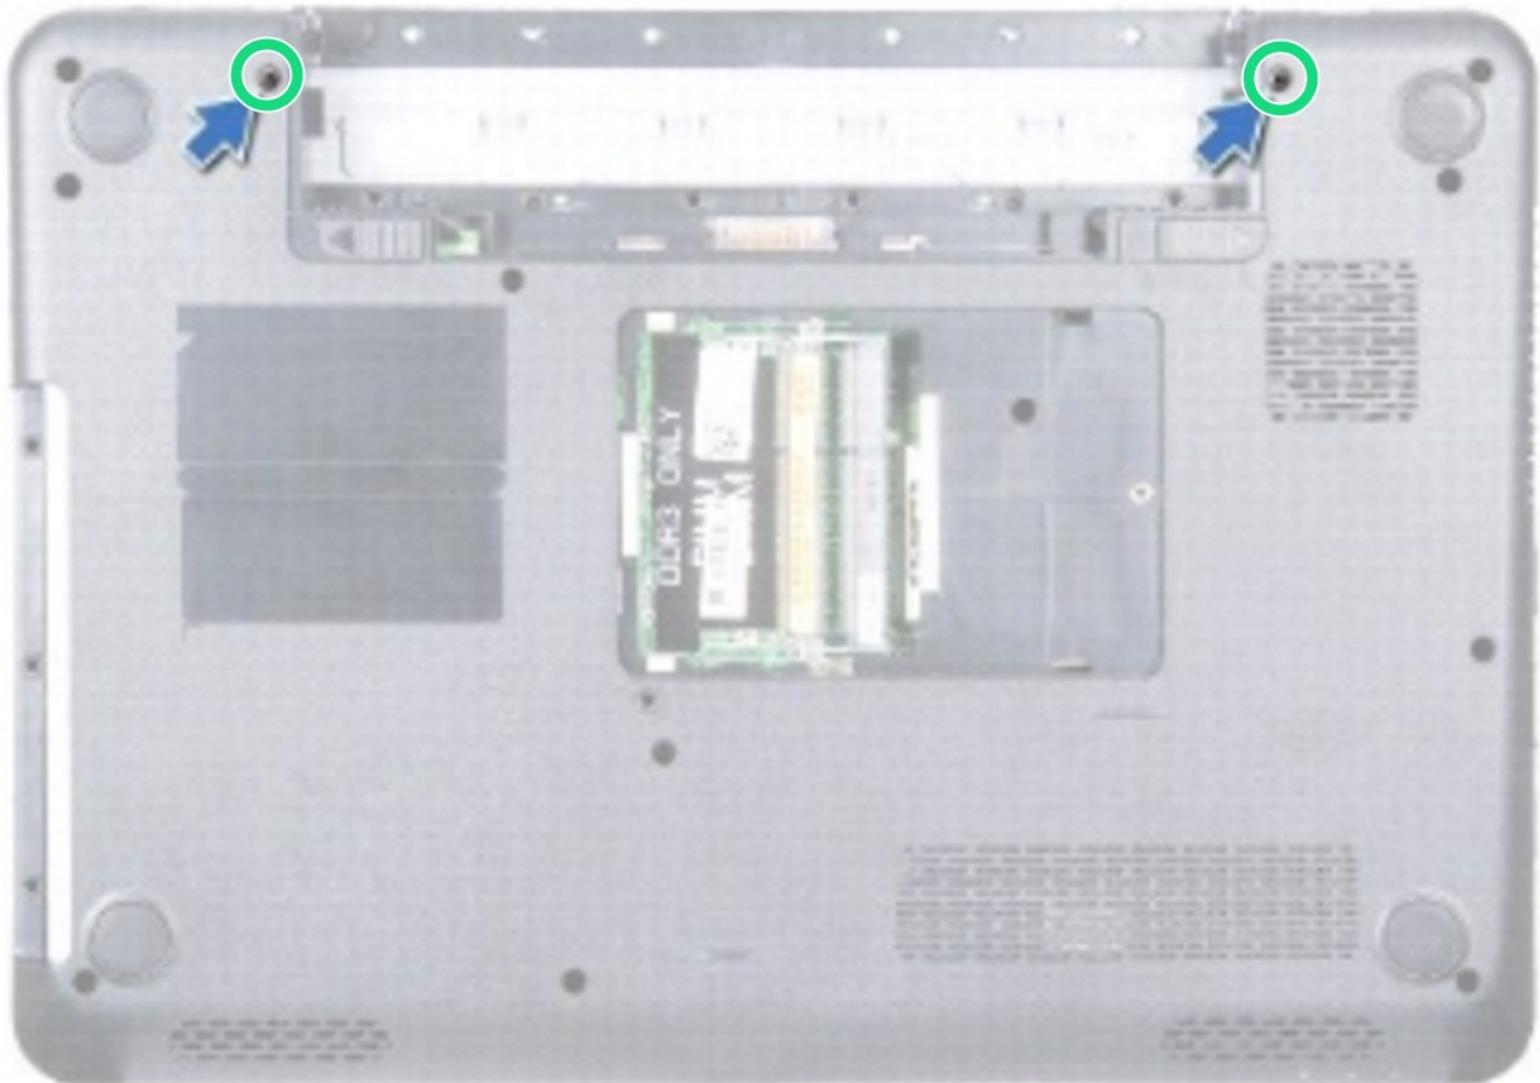


## INTRODUCTION

In this guide, we will be showing you how to remove and replace the Display Assembly.

### TOOLS:

- Phillips #0 Screwdriver (1)

## Step 1 — Remove the Screws

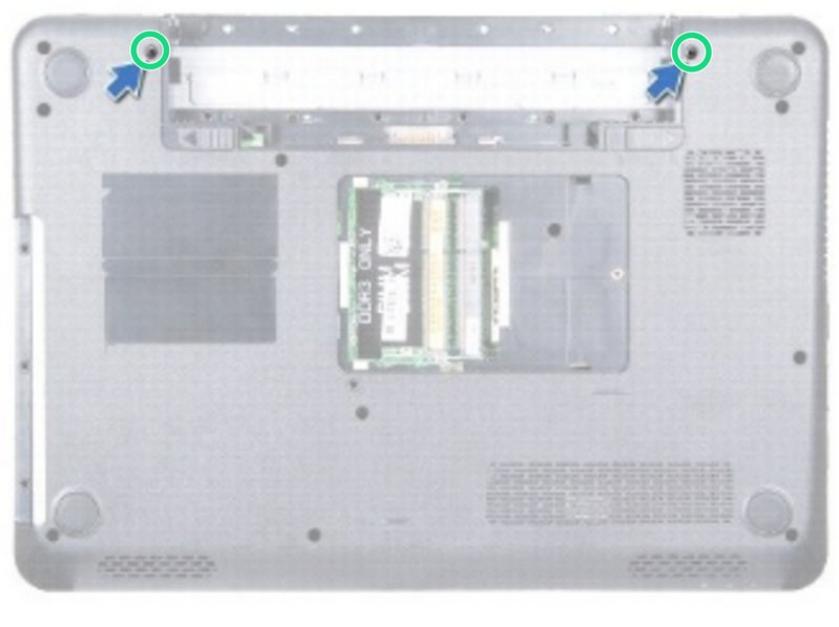


**⚠️** **WARNING:** Before working inside your computer, read the safety information that shipped with your computer. Follow the instructions in [Before You Begin](#).

**⚠️** **CAUTION:** To avoid electrostatic discharge, ground yourself by using a wrist grounding strap or by periodically touching an unpainted metal surface (such as a connector on your computer).

- Remove the two screws that secure the display assembly to the computer base.

## Step 2 — Open the Display

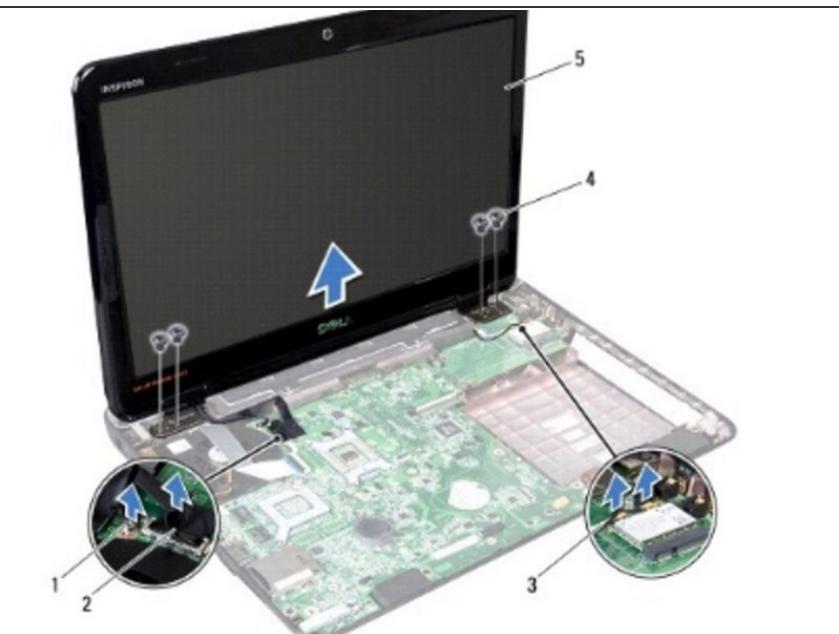

- Turn the computer over and open the display as far as possible.

## Step 3 — Disconnecting the Display Cable



- Disconnect the display cable from the connector on the system board, and remove the display cable grounding screw.

## Step 4 — Remove the Cables



- Make a note of the Mini-Card antenna cables and display cable routing and remove the cables from the routing guides.

## Step 5 — Remove the Screws




- Hold the display assembly in place and remove the four screws that secure the display assembly to the computer base.

## Step 6 — Remove the Display Assembly



- Lift and remove the display assembly out of the computer base.

## Step 7 — Placing the Display Assembly

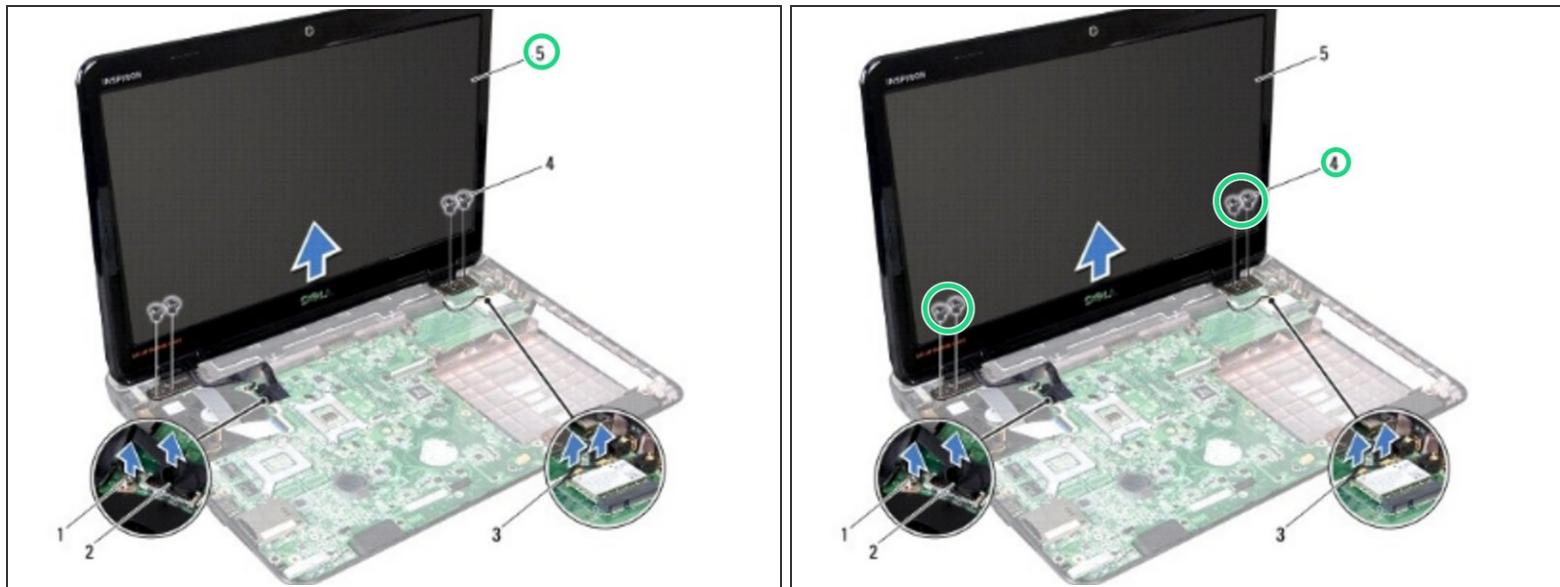

- Place the **NEW** display assembly in position and replace the four screws (two on each side) that secure the display assembly to the computer base.

## Step 8 — Routing the Cables




- Route the Mini-Card antenna cables and display cable through the routing guides.

## Step 9 — Connect the Display Cable




- Connect the display cable to the connector on the system board, and replace the display cable grounding screw.

## Step 10 — Close the Display

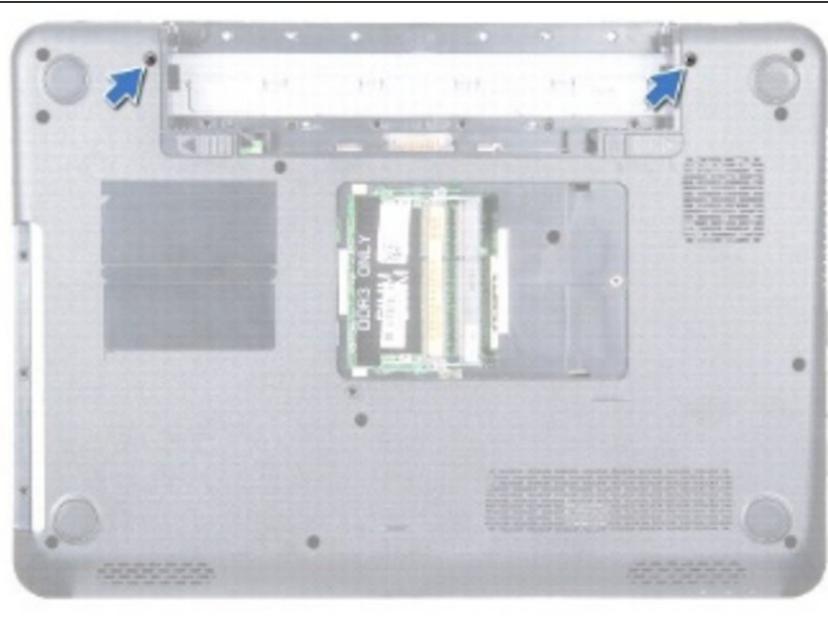

- Close the display and turn the computer over.

## Step 11 — Replace the Screws

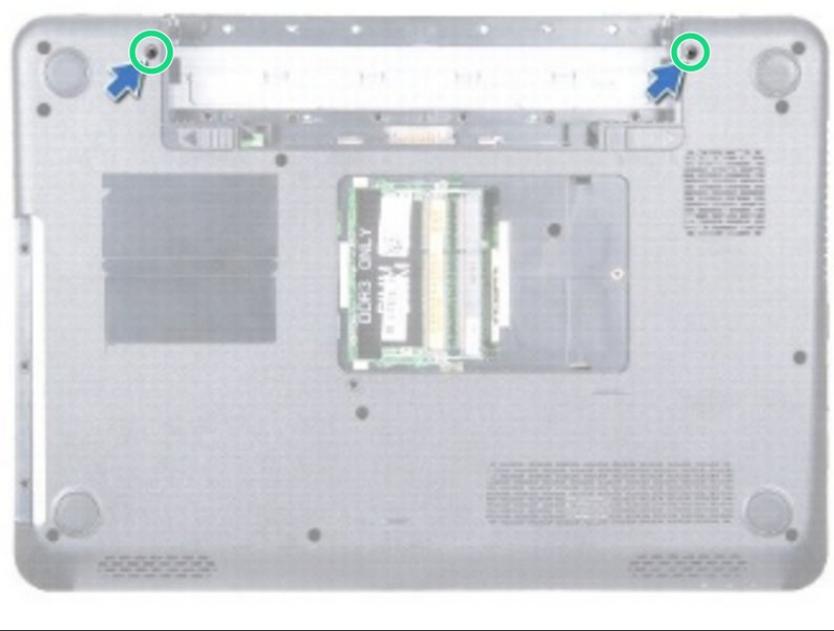

- Replace the two screws that secure the display assembly to the computer base.