


2-26-73 1333

**SPEAKERPHONE SYSTEM 3-TYPE
500R/S, 1500S, AND 2500S TELEPHONE SET
CONNECTIONS**

1. GENERAL

1.01 This section is reissued to add information on the 1500S and 2500S telephone sets, formerly contained in Sections 512-621-402 and 512-622-405 which are hereby canceled.

1.02 Refer to the appropriate Reference or Service section in the Division 502 for complete wiring information of the telephone set. Information on the components of the 3-type speakerphone system will be found in Section 512-620-100.

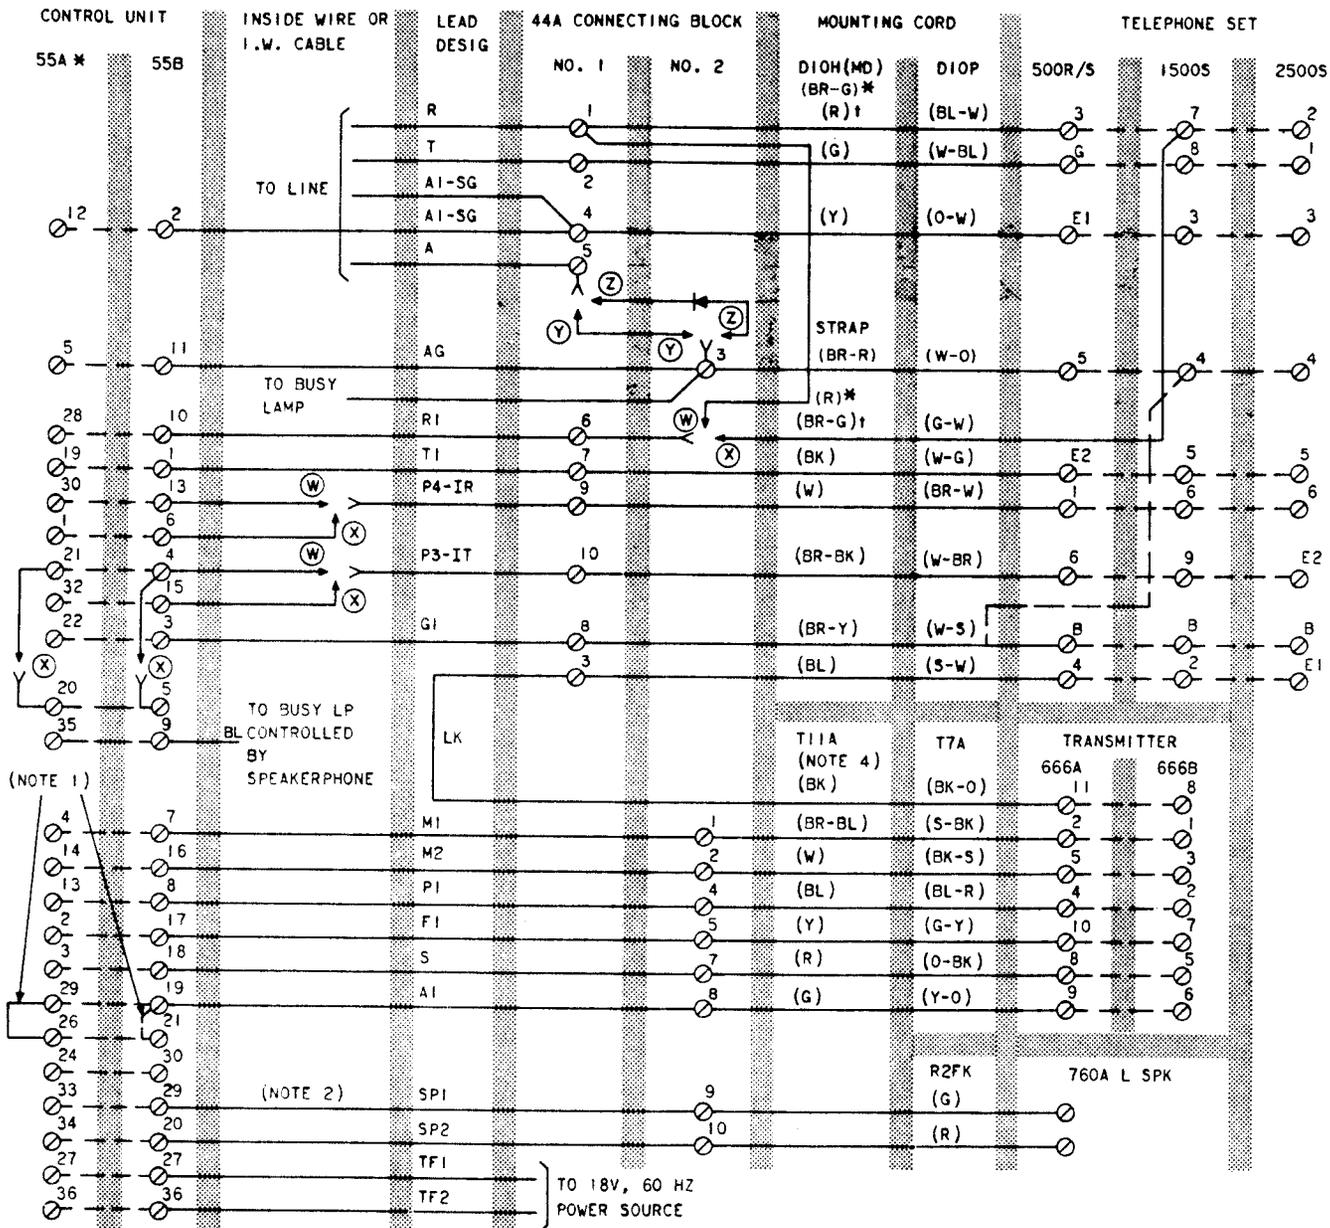

- NOTES:
1. ADD STRAP FOR BUSY LAMP CONTROLLED BY SPEAKERPHONE ONLY.
 2. IF REDUCED LOUDSPEAKER VOLUME IS DESIRED, MOVE SPI LEAD TO TERM. 30 (55B) OR 24 (55A).
 3. MODIFIED FOR TOUCH-TONE USE.
 4. INSULATE AND STORE UNUSED LEADS.
- (W) 500R/S
 (X) 1500S, 2500S
 (Y) WITHOUT BUSY LAMP
 (Z) WITH BUSY LAMP KS-15724, LI DIODE

* COLOR CODE USED ON 500R/S
 † COLOR CODE USED ON 1500S

Fig. 1—500R/S, 1500S, and 2500S Telephone Set—Speakerphone Connections