

2AB TELEPHONE ANSWERING SET

IDENTIFICATION

1.00 GENERAL

- 1.01** This section identifies the 2AB telephone answering set which was designed to be used as an announcement set in the group alerting system.
- 1.02** This announcement set provides automatically repeated recorded announcements to the group alerting system. The 2AB telephone answering set is controlled remotely by means of the push buttons of a modified 565GBR key telephone set through a 53A control unit.
- 1.03** See section entitled Group Alerting System — Station Apparatus — Identification, for over-all description of this system.

2.00 IDENTIFICATION

- 2.01** The 2AB telephone answering set consists essentially of a 2A telephone answering set which has been modified by removing the external controls and indicators and changing the wiring so that it can be remotely controlled (see Fig. 1 and 2).
- 2.02** The dc power to operate associated control unit is furnished by 2AB telephone answering set.
- 2.03** A variable cycle feature is provided which automatically adjusts reproduce cycle to length of recorded announcement. Recording time is adjustable from 10 seconds to 1 minute. Adjust for 1 minute unless otherwise instructed to meet local requirements.
- 2.04** Power required for this set is 105- to 125-volt 60 cycle ac supplied by customer. A KS-15662 inverter must be used where only dc power is available.

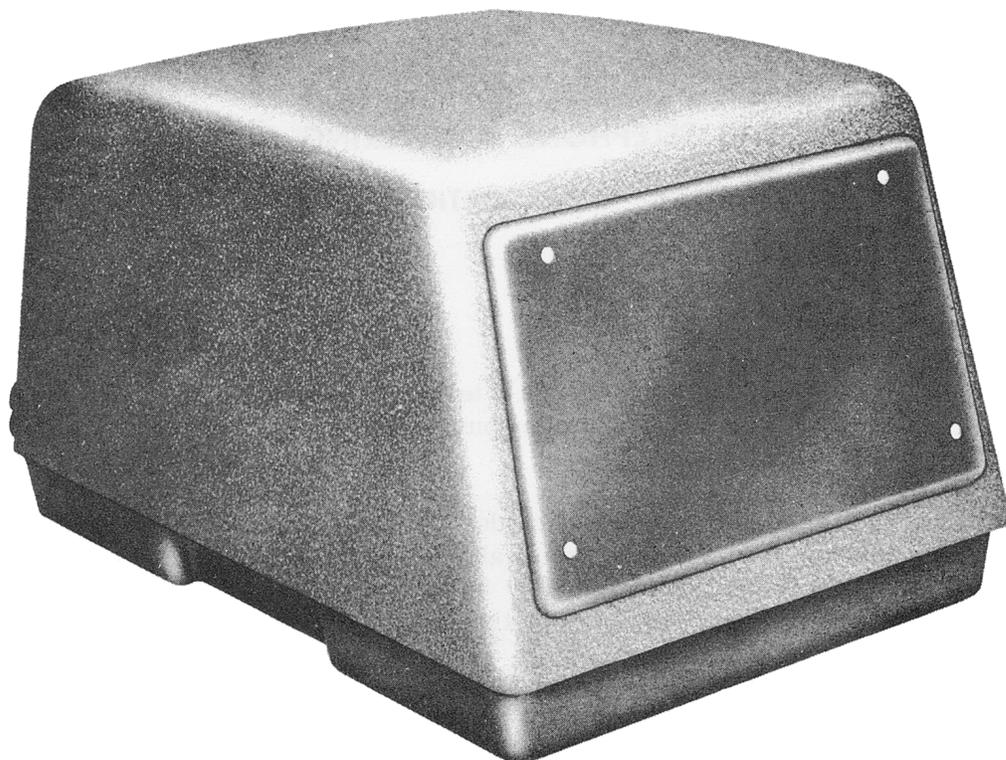


Fig. 1 – 2AB Telephone Answering Set

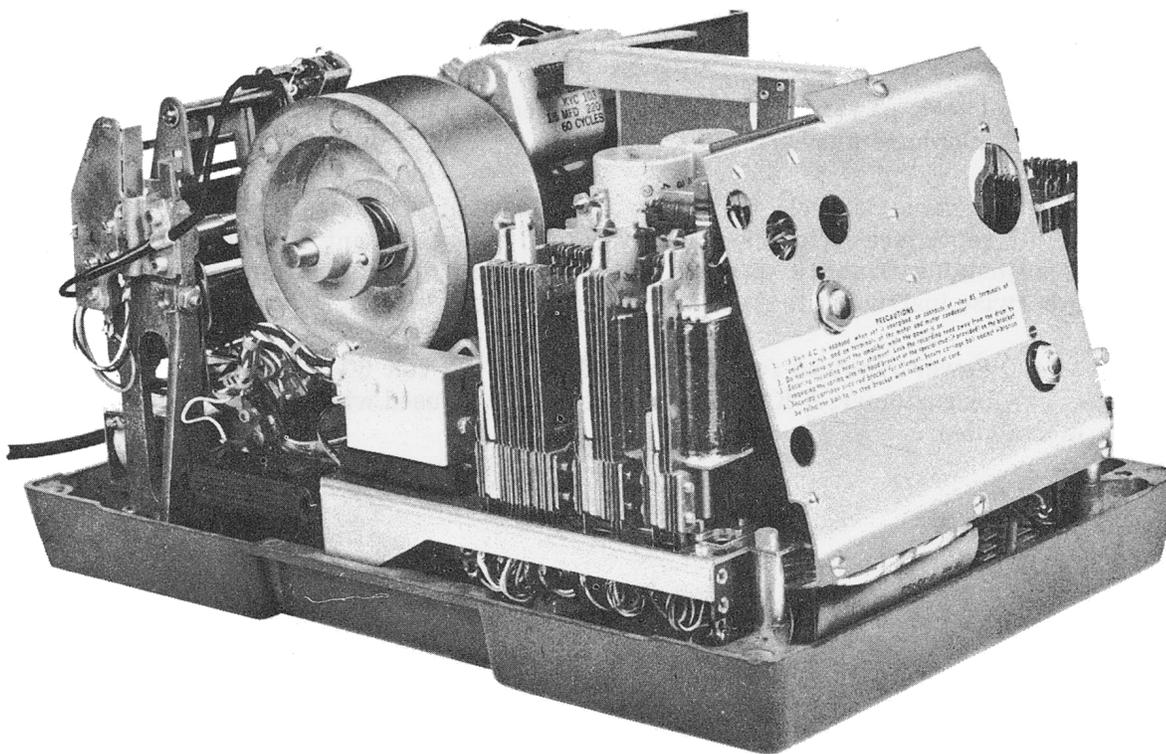


Fig. 2 – 2AB Telephone Answering Set, Cover Removed