




# Digital2 D2-861G Charging Port Replacement

To replace the Digital2 charging port for the D2-861G model.

Written By: Eduardo Duran

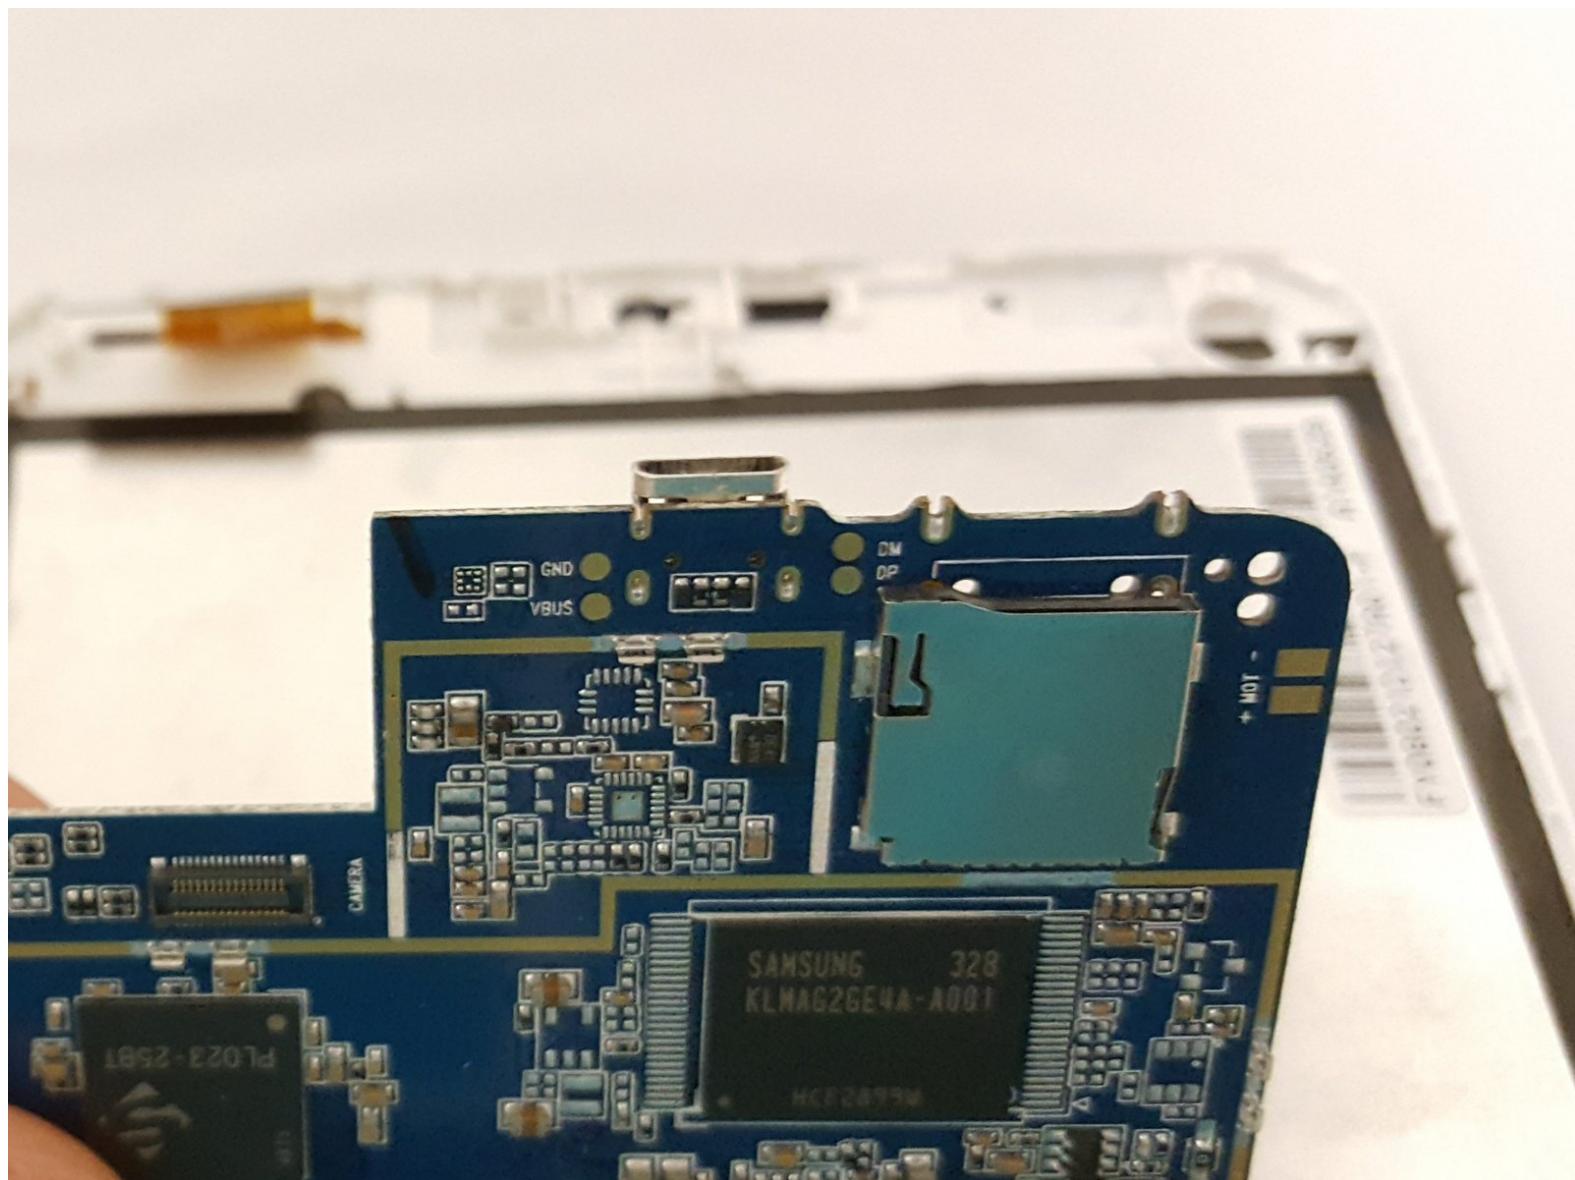

## INTRODUCTION

This guide will be showing you how to replace the charging port for the Digital2 D2-861G model. Be sure to carefully remove parts to avoid damaging the device.

### TOOLS:

- [Spudger](#) (1)
- [Phillips #00 Screwdriver](#) (1)


## Step 1 — Motherboards



**⚠** Working on your device while powered on may result in electric shock. Make sure to unplug and power down your device before you begin.

- Place your device on a soft cloth to avoid scratching the screen.
- Flip your device over so back panel is facing upwards.


## Step 2

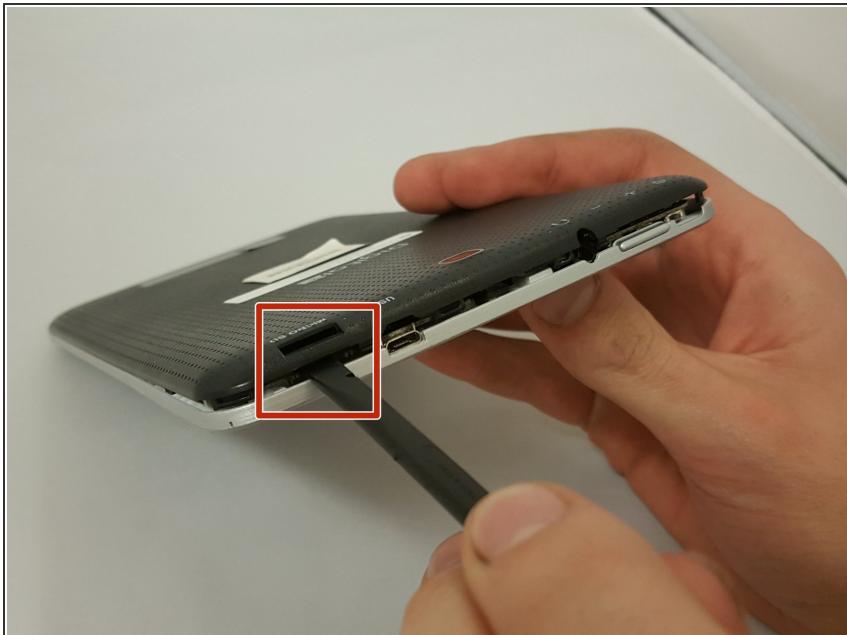

**⚠** Do not use a lot of force as it can break the clips or the back panel.


- Insert spudger in the slot below the micro SD card.
- You should hear clips releasing as you pry along the edges.
- With the spudger tool, run along the edges of the backing undoing 20 plastic clips.

## Step 3

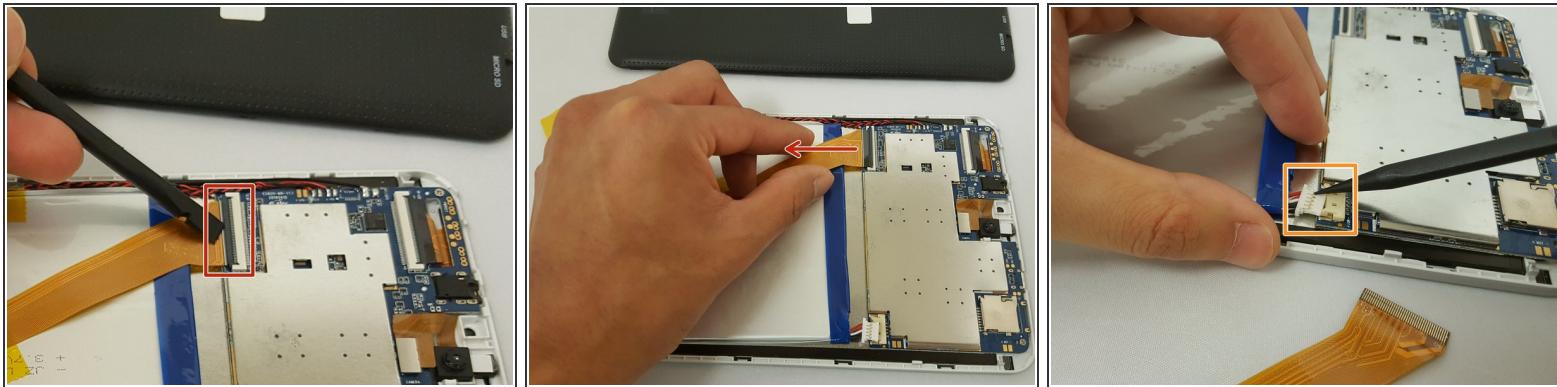


- Locate the gold colored ZIF (Zero insertion force) connector and disconnect it from the motherboard.
- (i)* To disconnect the ZIF connector, go under the black tab and lift up. Then pull the connector out.
- Locate the bundled cable connector and disconnect it by simply pulling it gently or using a spudger.
- (i)* Disconnecting the bundled cable connector helps avoid short circuiting anything on the device.

## Step 4

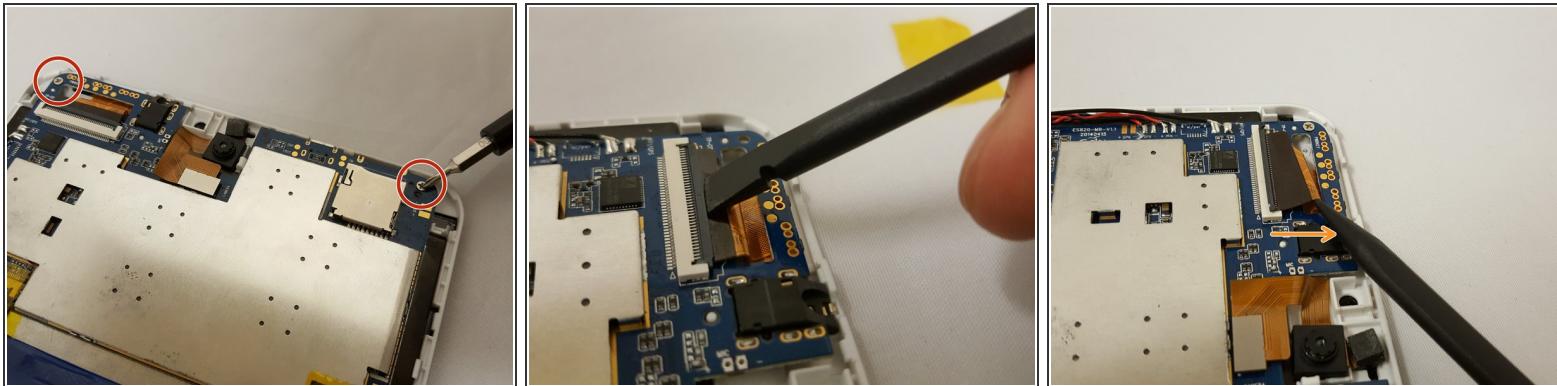

- (i)* Make sure to have your magnetic board to hold your screws.
- Remove two 3.51mm screws that are located on the top corners with your Phillips #00 screwdriver.
- Next, unplug the ZIF connector by going under the black tab and simply lift up.
- Slide the connector out with the pointed side of the spudger.


## Step 5

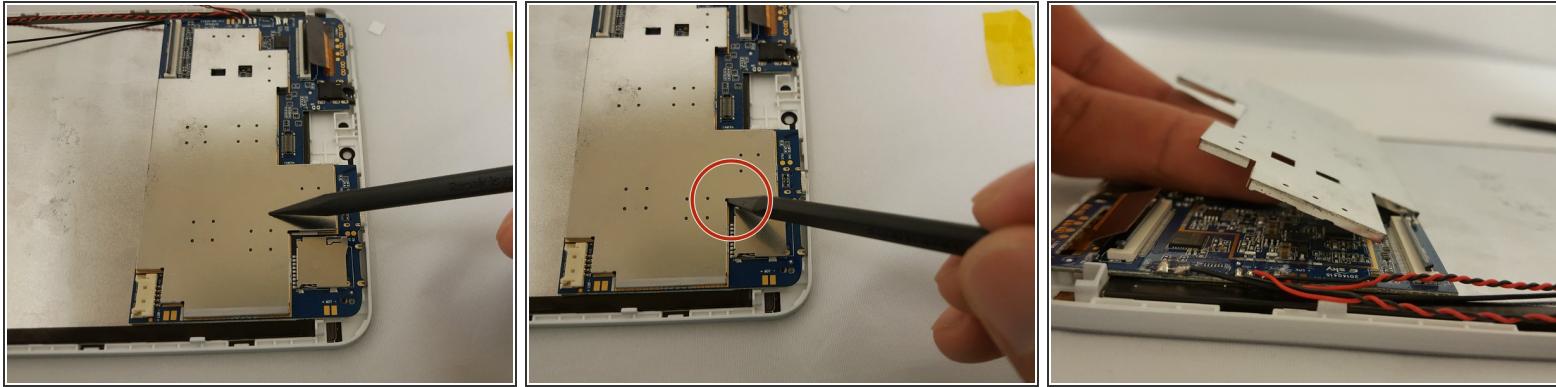

*(i)* This step is optional if you want to remove the metal casing.

- Insert the pointed side of the spudger in the corner and gently lift.
- Once one side is lifted, use your fingers and with little force, lift up to remove the case.

## Step 6

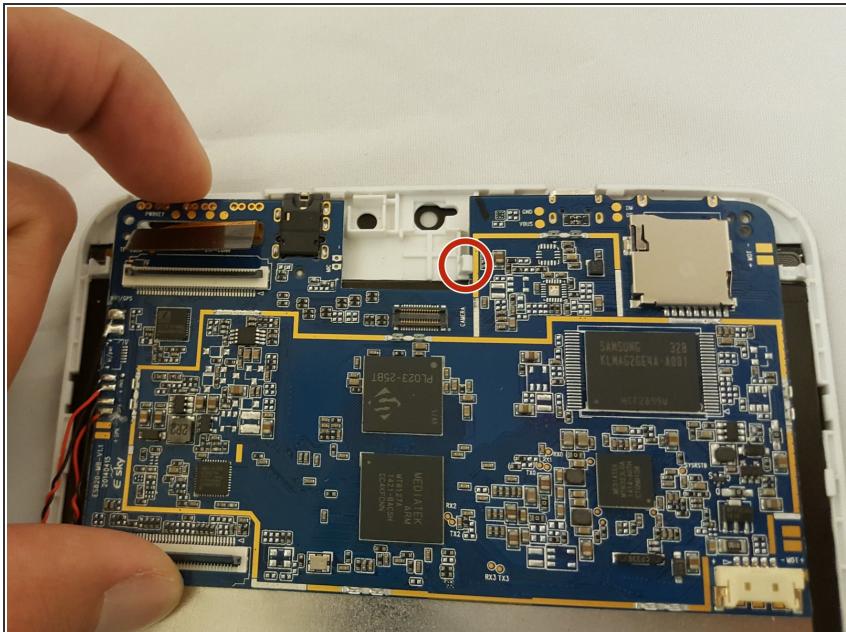


 Use little force or else you risk breaking the motherboard.

 Watch out for the ZIF connector!

 There is a white clip holding the motherboard.

- To remove the motherboard, grab the component on the top left and gently lift while pushing or pulling to the right.

## Step 7 — Charging Port

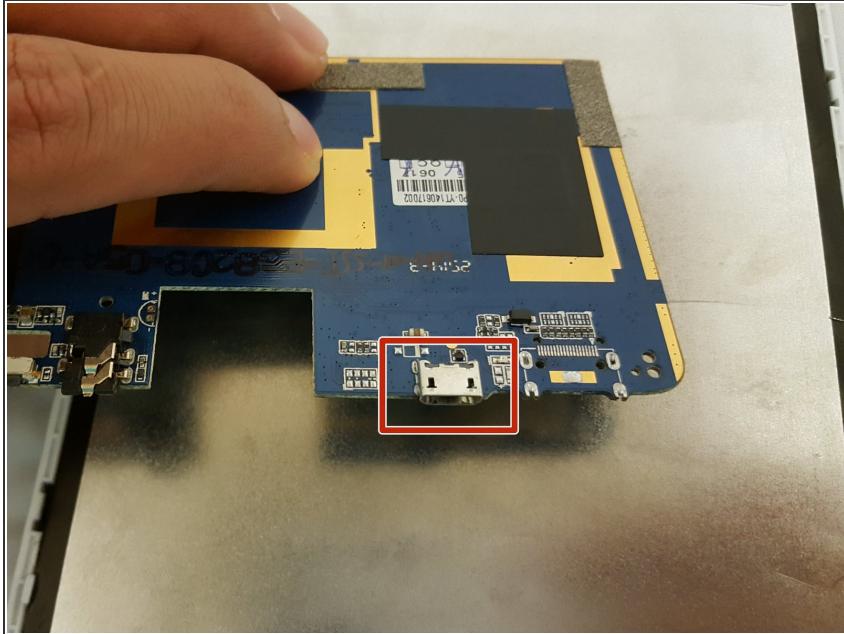

- ⓘ Refer to iFixit's guide on how to Solder [How To Solder and Desolder Connections](#)
- To replace the charging port, you can either replace the motherboard or desolder the port.

To reassemble your device, follow these instructions in reverse order.