




Disassembling HP Photosmart c3180 Top Panel

Remove the top of the scanner to access the scanner components and the rest of the printer.

Written By: Jim

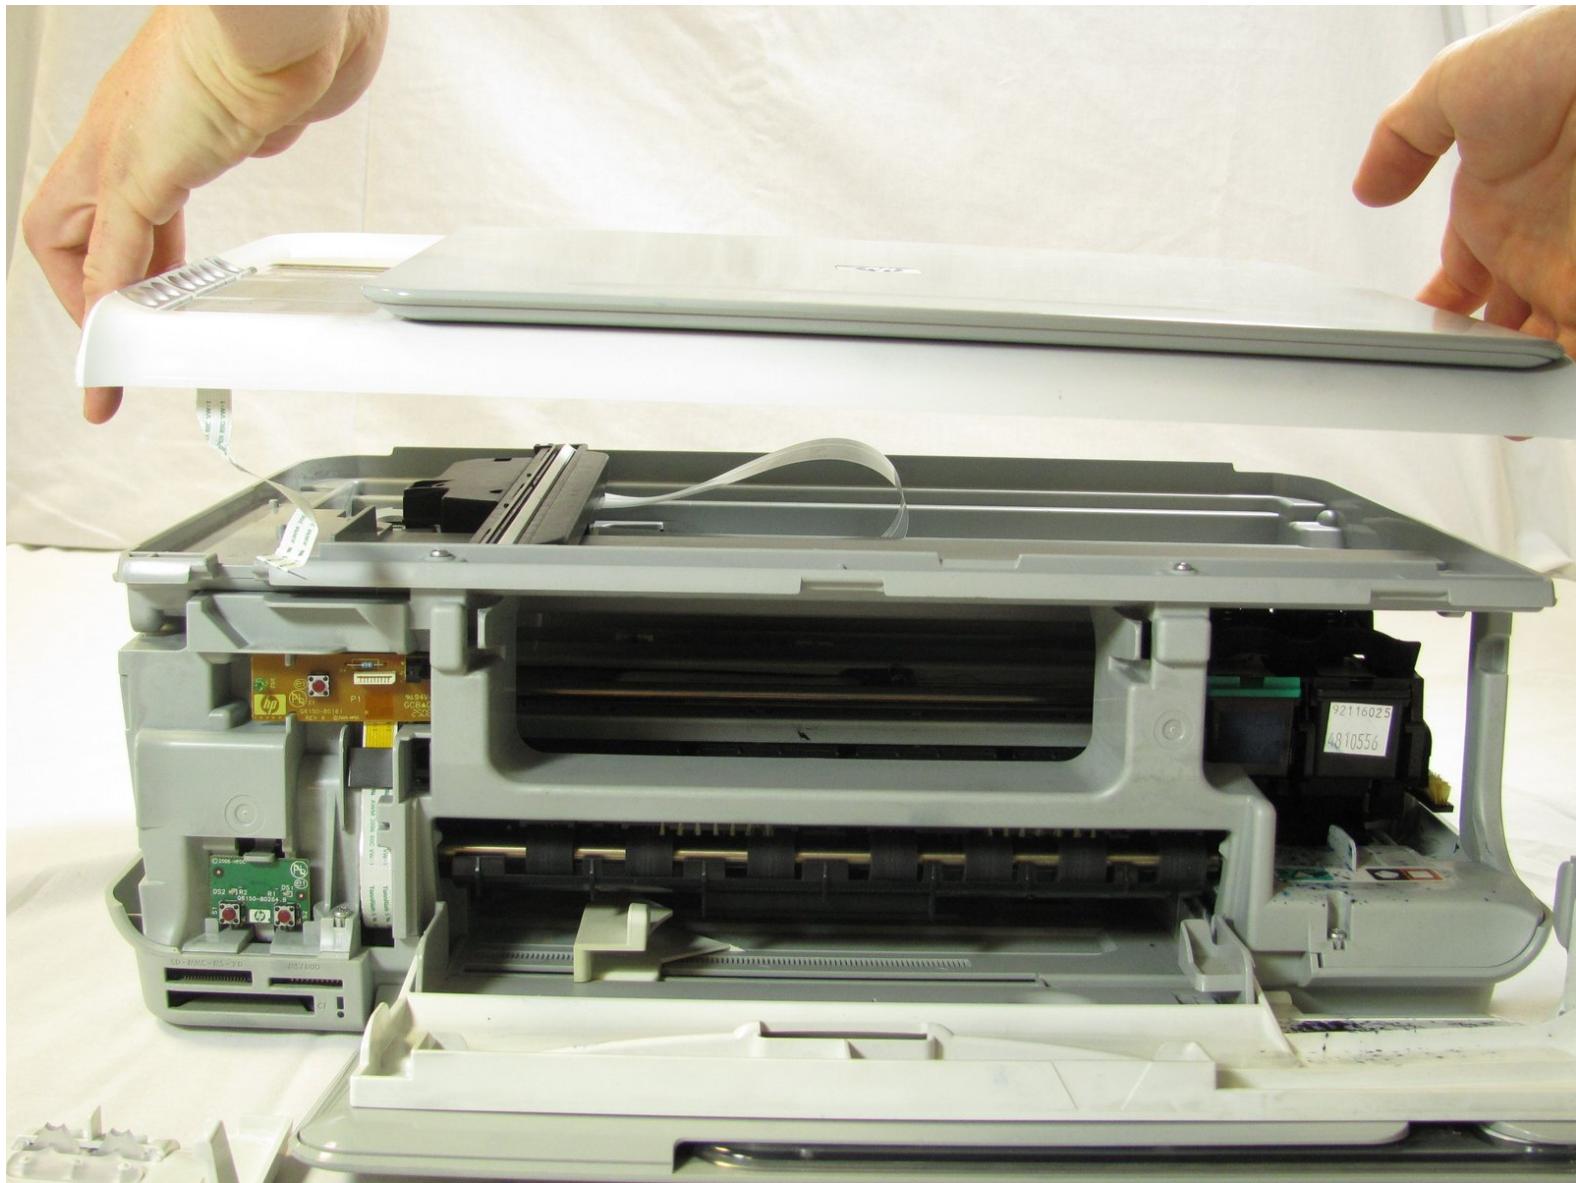

INTRODUCTION

Be sure to remove the ink-cartridges and unplug the printer before beginning dis assembly of the device.

TOOLS:

- [Spudger](#) (1)
- [T10 Torx Screwdriver](#) (1)

Step 1 — Top Panel



 Before disassembling your printer, be sure that the printer has been unplugged.

- Rotate the printer 90 degrees counter clockwise so that the side panel next to control panel is facing you.
- Remove the two T10 12mm Torx screws from the left side panel.

Step 2




- Firmly pull the the back of the side panel until it separates from the body of the printer.
- Rotate the side panel upwards while pulling it towards yourself to remove the panel.

Step 3



- Rotate the printer 90 degrees clockwise.
- Grasp the paper tray and rotate it down.
- Insert your fingers into the slot in the printer door and pull to rotate the gate down.

Step 4

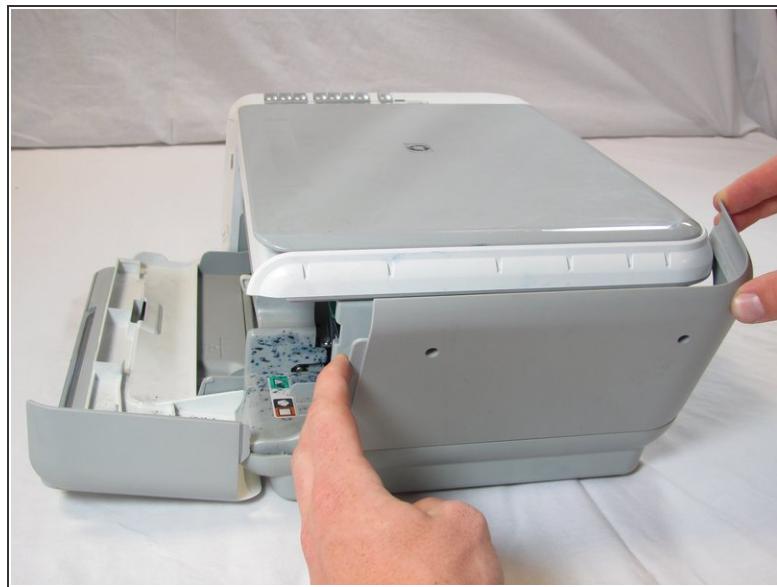

- Rotate the printer 90 degrees clockwise.
- Remove the two T10 12 mm Torx screws.
- Grasp both sides of the side panel and pull it forward to remove the panel.

Step 5



- Rotate the printer 90 degrees counter clockwise.
- Lift the scanner lid to expose the scanner glass.


Step 6



- Remove the two T10 12 mm Torx screws.



⚠ Do not attempt to lift the top panel off the printer yet because it is still connected to the printer body by a cable.

Step 7

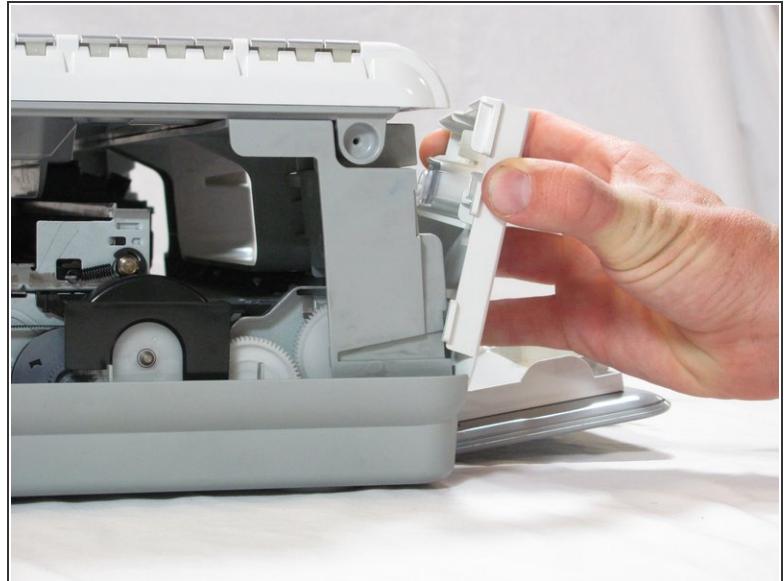


- Rotate the printer 90 degrees counter clockwise.
- Inside the printer is a small white tab. Press it inward with a spudger until a pop is heard.
- Remove the front panel by grasping its front and pulling away from the printer.

Step 8

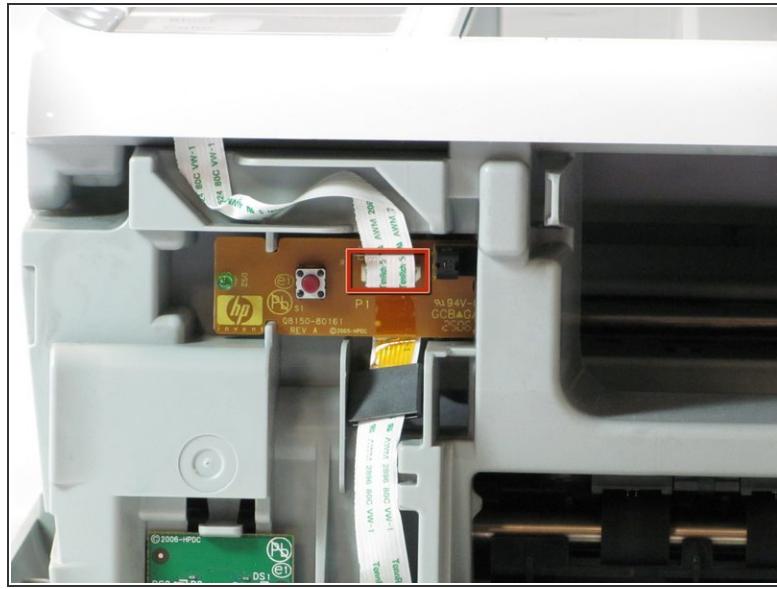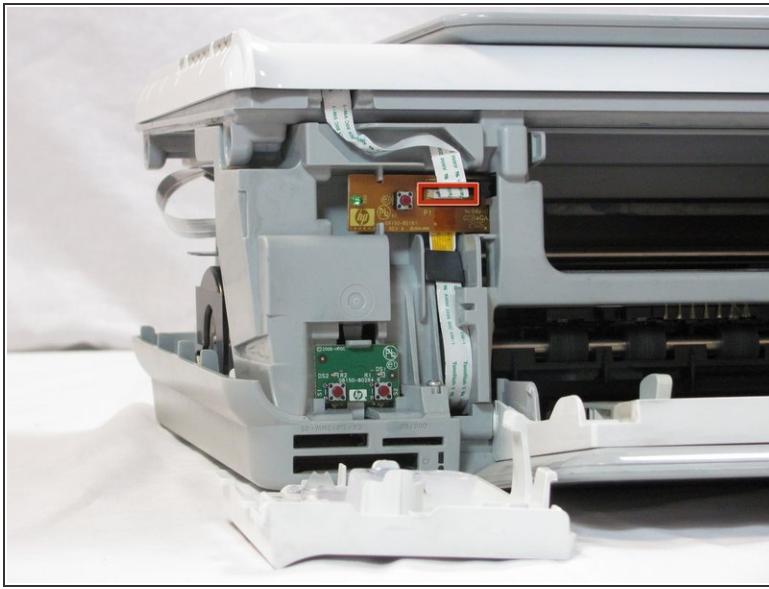

- Rotate the printer 90 degrees clockwise.
- Remove the cable connecting the top panel of the printer to the power button assembly.

Step 9

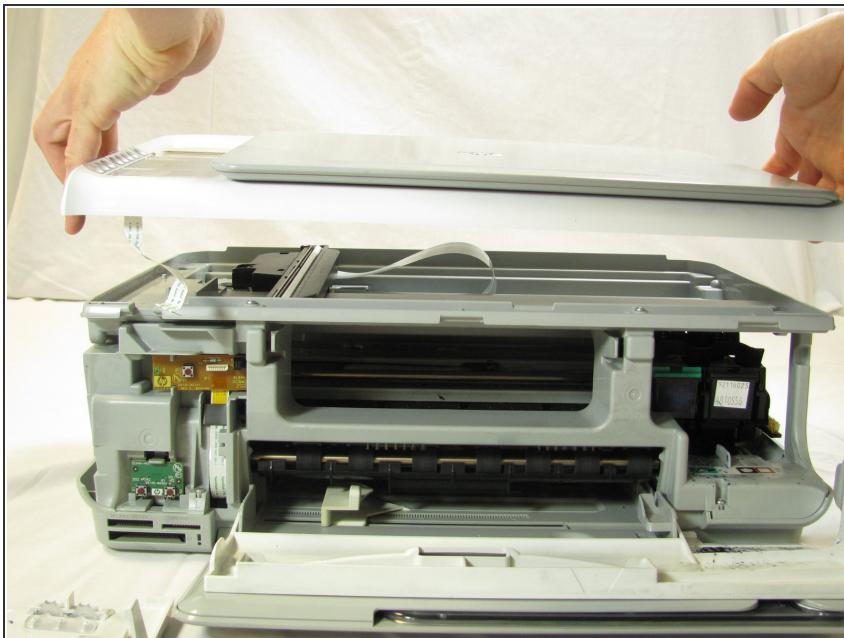

- Carefully lift the top panel of the printer away from the printer body.

To reassemble your device, follow these instructions in reverse order.