




# Drill Master Heat Gun Power Switch Replacement

Use this guide to replace the power switch on your heat gun.

Written By: Mikayla Kim

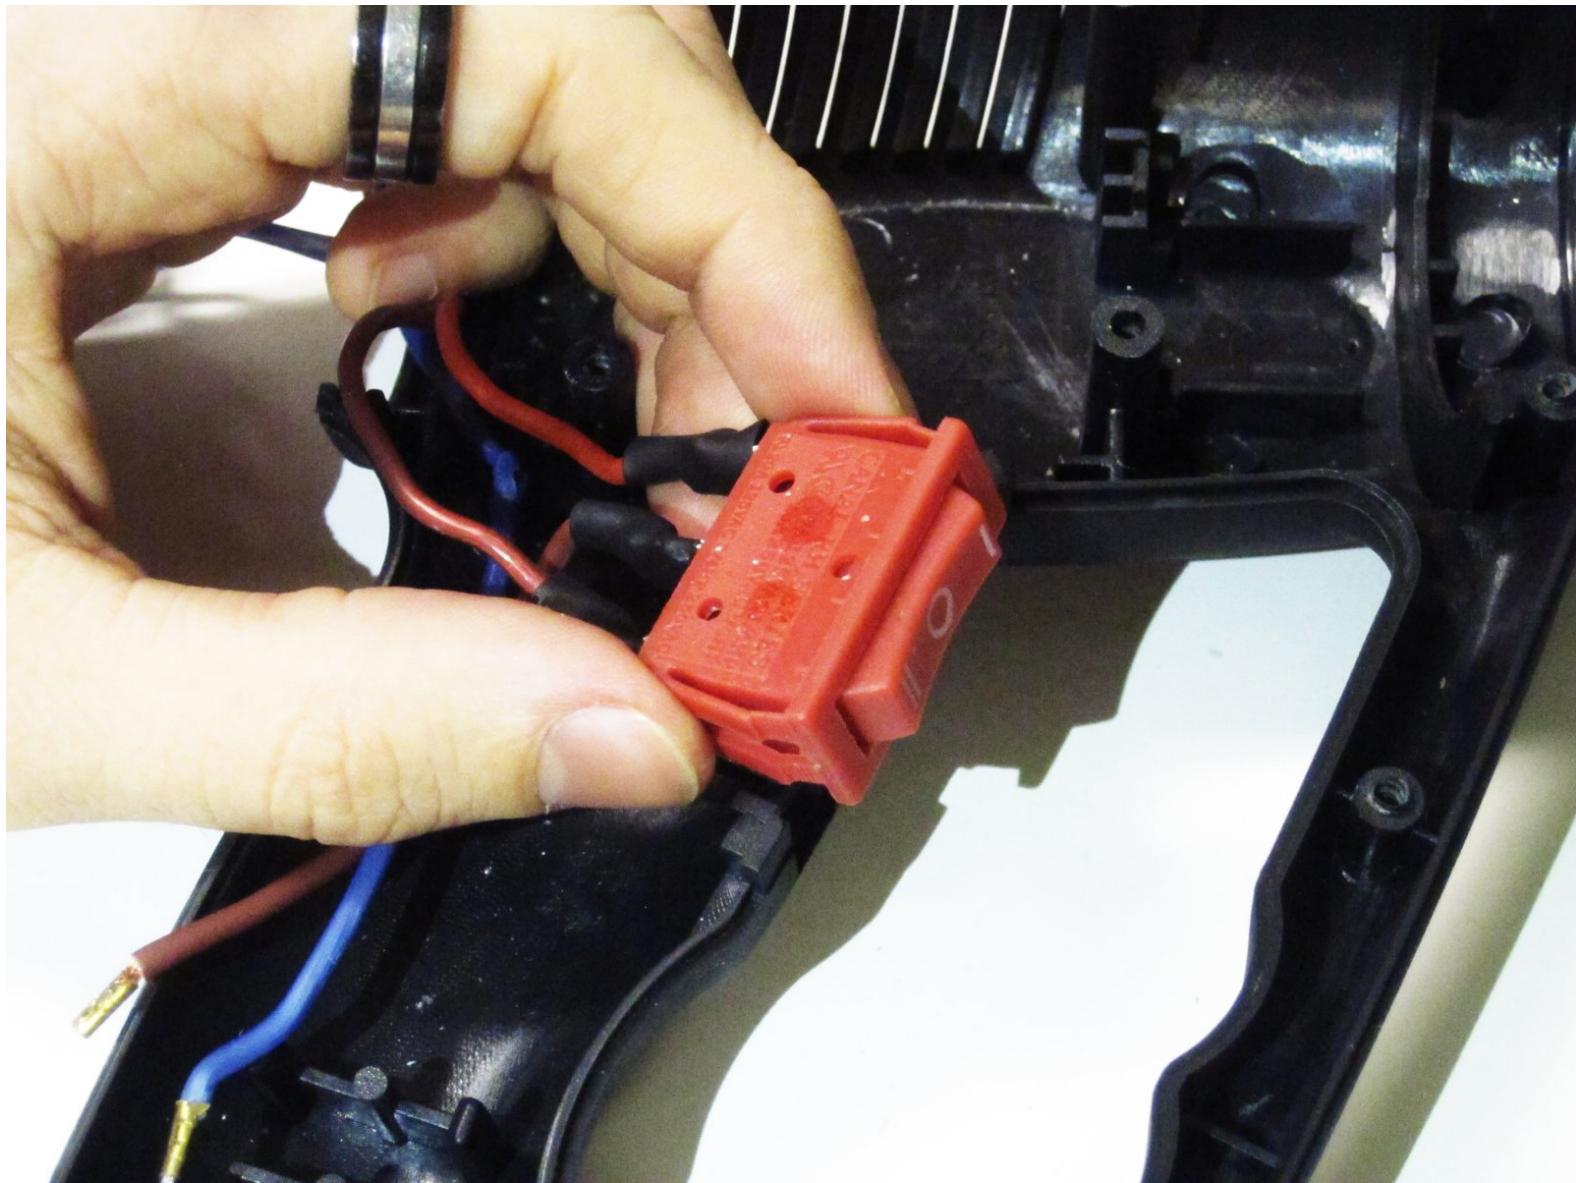

## INTRODUCTION

This requires soldering, so for a quick lesson or just a refresher, check out [How to Solder and Desolder Connections](#).

### TOOLS:

- Phillips #0 Screwdriver (1)
- Flathead 3/32" or 2.5 mm Screwdriver (1)
- Soldering Workstation (1)

## Step 1 — Power Switch



**⚠** Be sure the heat gun is unplugged before starting this process.

- Remove the seven 14mm screws from the side of the drill using the PH#0 screwdriver.
- **i** You will need a screwdriver extension.

## Step 2



- Remove the 8mm screw from underside of barrel using the PH#0 screwdriver.
- **i** Don't try to open the casing just yet.

## Step 3




- Remove the barrel casing on either end by twisting and pulling each side off.

## Step 4




- Remove the top casing to reveal inside of drill. You might have to tug a little harder for this one.

## Step 5

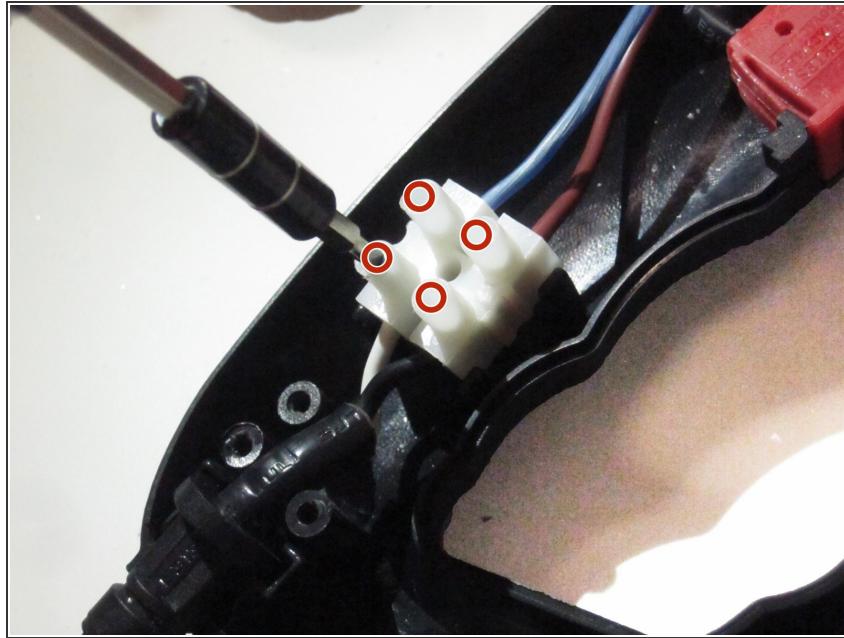



- Loosen four screws on the wire connector using the flathead 2.5 screwdriver.
- *i* Screws do not come out of connector.

## Step 6

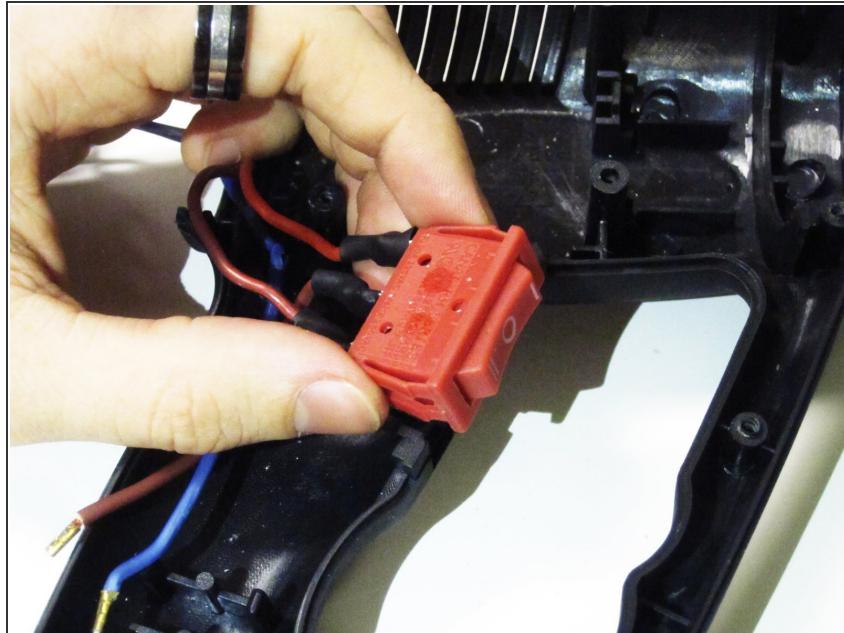


- Squeeze the tabs on either side of the power switch to remove from the casing.

## Step 7

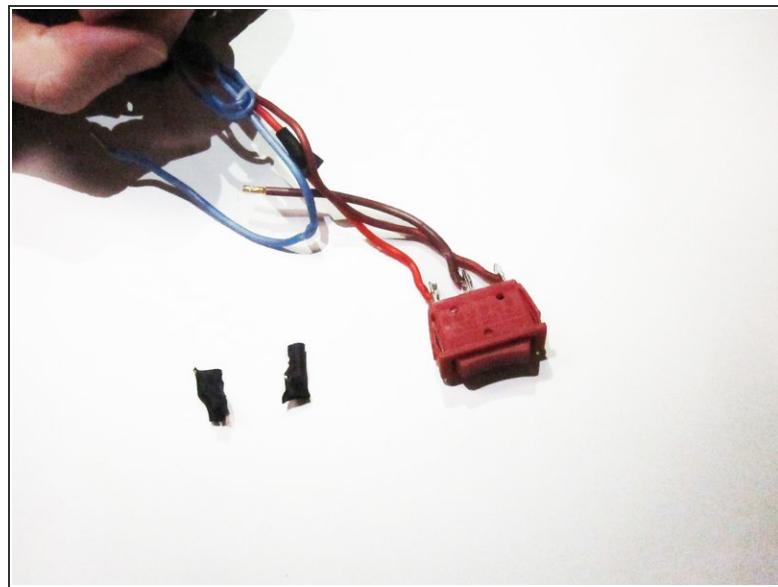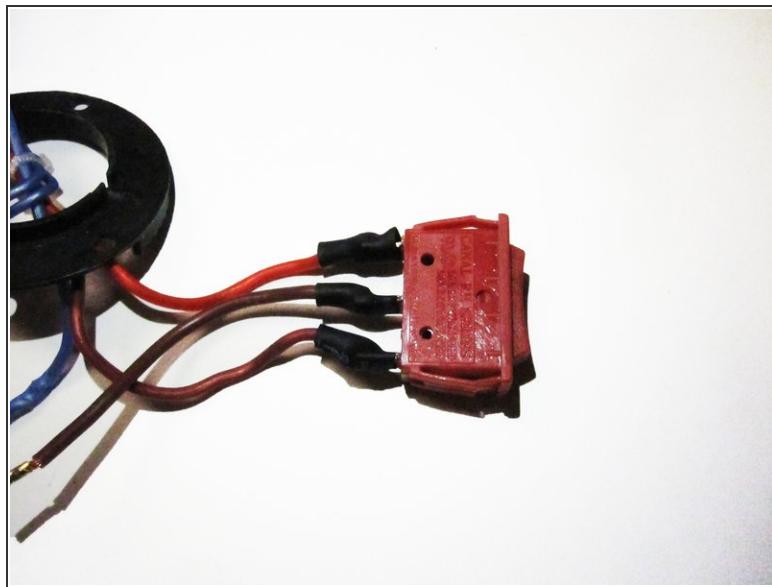

- Remove the black, plastic wire protectors from the end of the power switch.

## Step 8

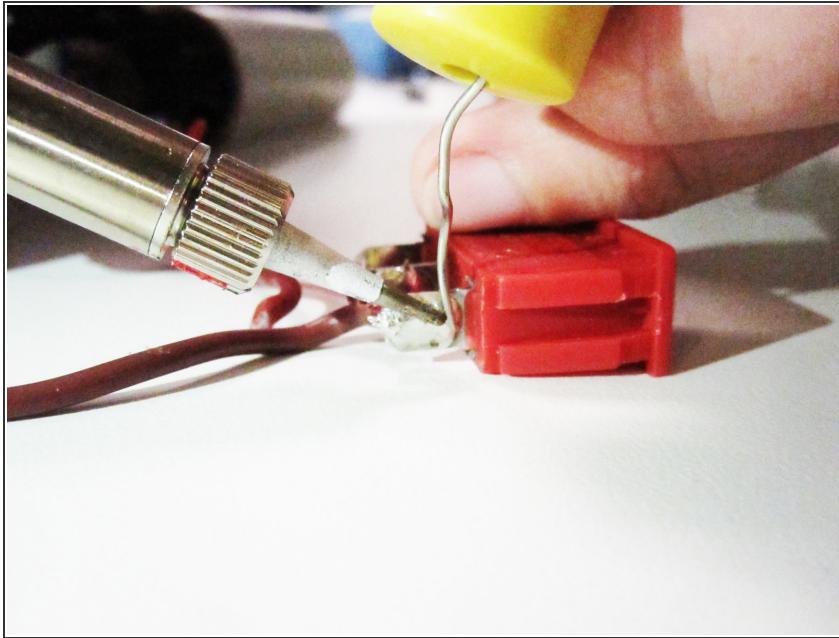

- Use soldering iron to remove the electrical wiring from the power switch. To replace the power switch, solder the new switch onto the wires.

**i** Heating the soldering metal will allow you to pull off the electrical wiring.

**i** For a brush-up on proper soldering, check out [How to Solder and Desolder Connections](#).

To reassemble your device, follow these instructions in reverse order.