




# Flip Video LCD Screen

Written By: Elizabeth

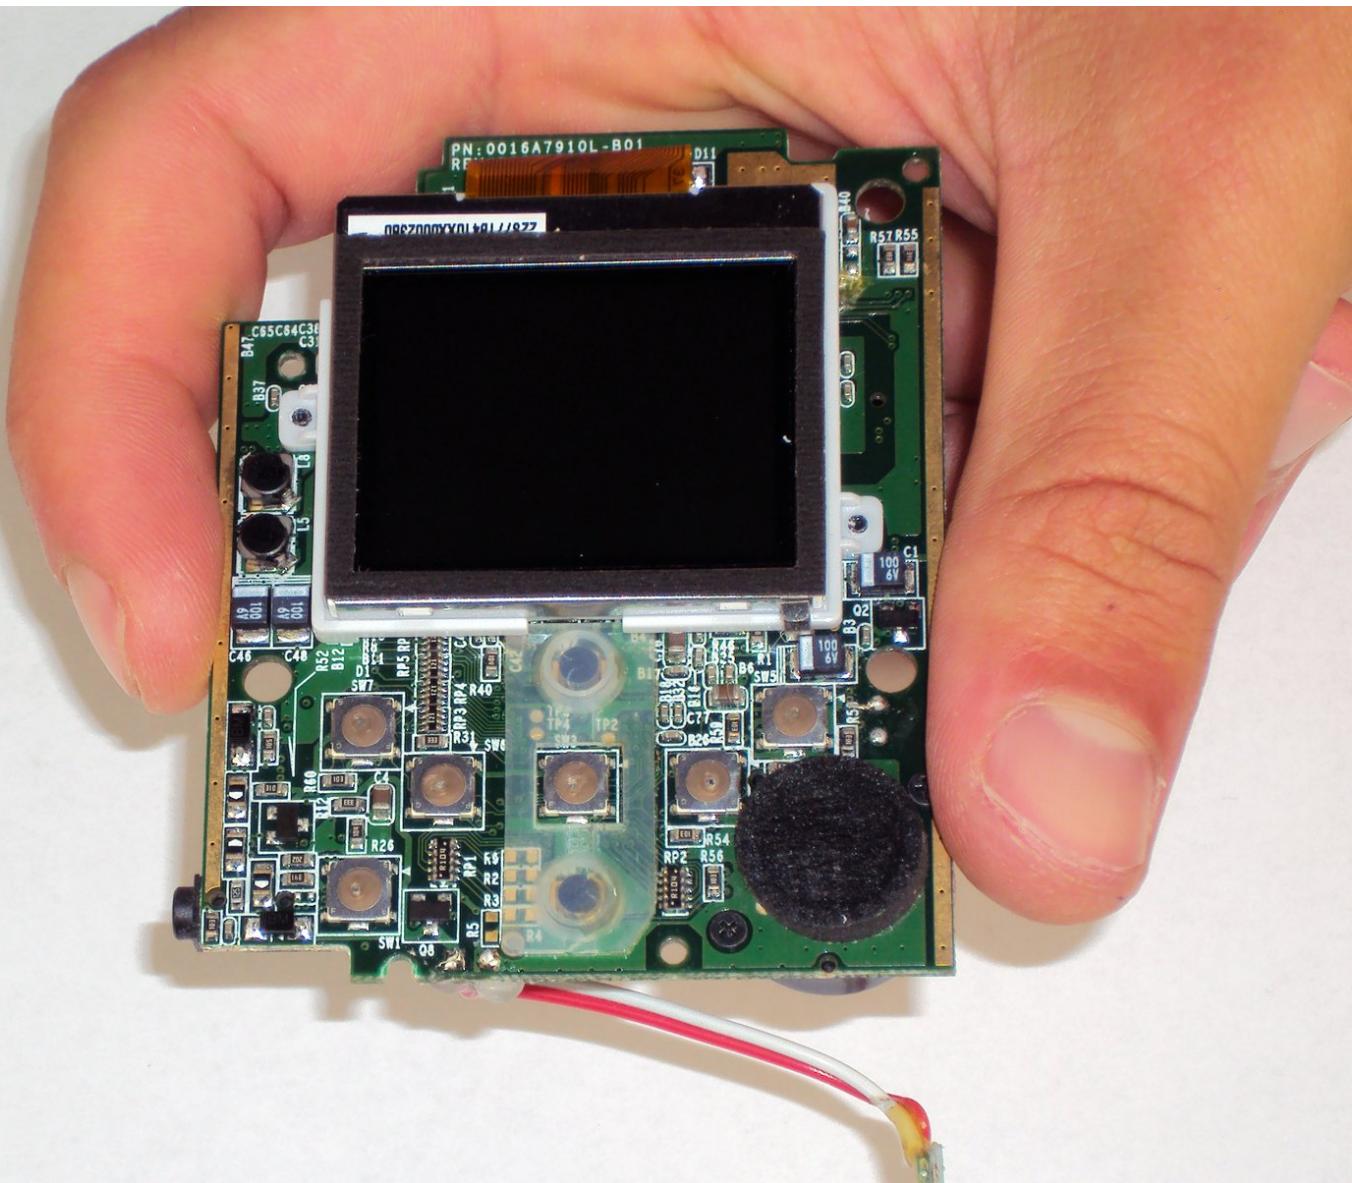


## INTRODUCTION

This guide will show you how to disassemble your flip video and replace the LCD screen.

### TOOLS:

- [Phillips #00 Screwdriver](#) (1)
- [Spudger](#) (1)

## Step 1 — Outer Shell

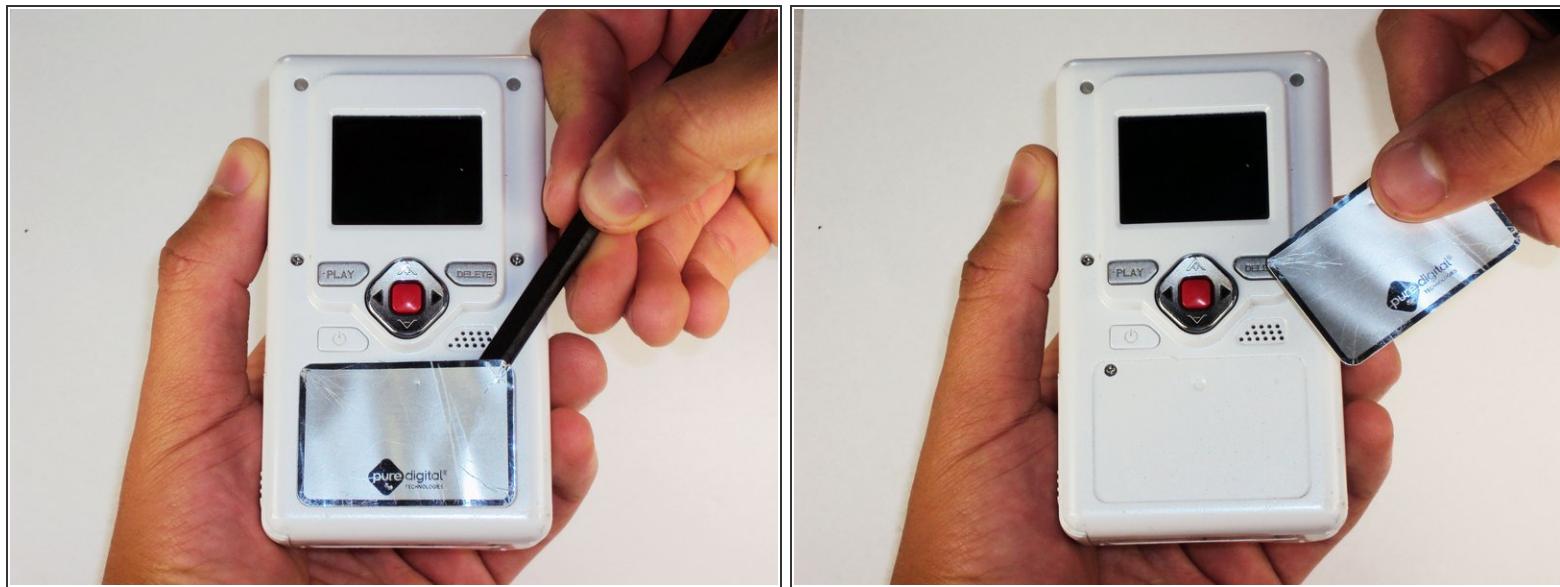

 Turn off the device and take the batteries out.


- Remove metal sticker under the LCD screen with a spudger.
  -  This may require a large force to pry off the glued sticker.

## Step 2



- Remove the 4 gray screw caps with the spudger. These cover the screw heads and protect from dirt or grime.

## Step 3

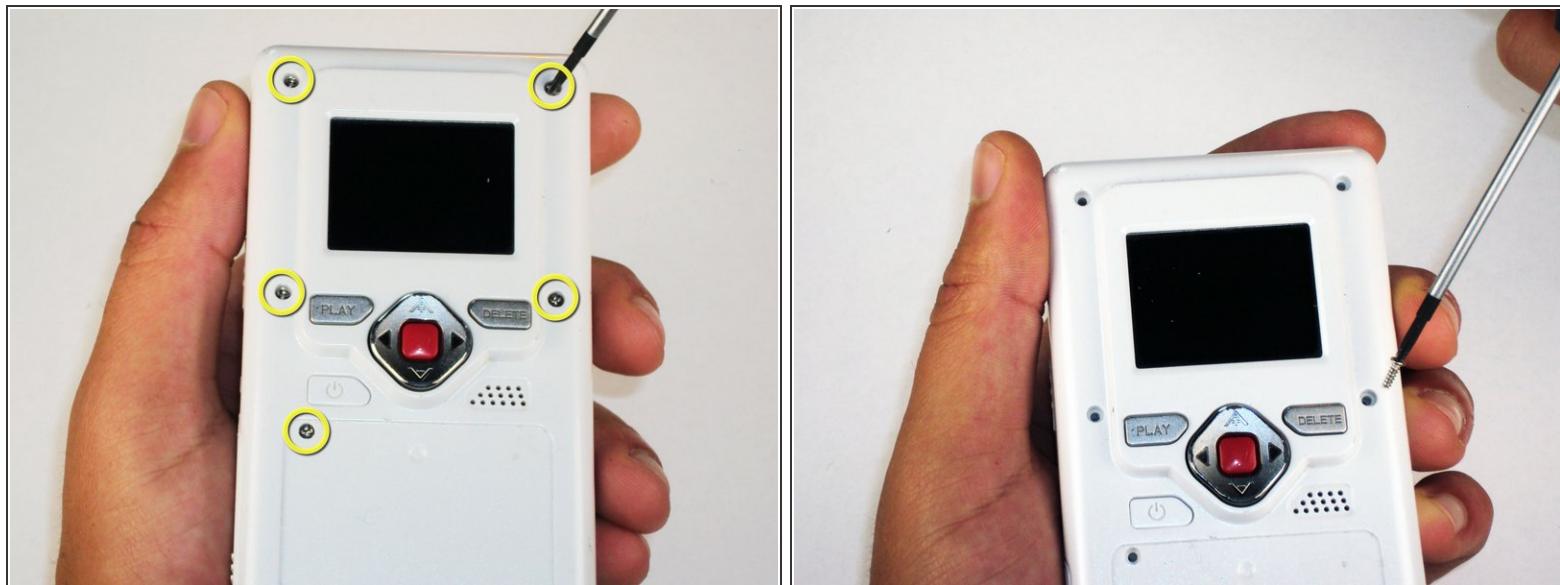

- Remove the 5 10mm screws with the #00 Phillips screwdriver. These connect the back of the outer shell to the front of the outer shell.

## Step 4




- Open battery door. This can be done by gently depressing and sliding the battery down downward.

## Step 5




- Use the spudger to separate outer shells.
- The spudger must be inserted between the shell halves to pry the edges apart.
- Slowly work around the outside to separate the halves.

## Step 6 — Circuit Board

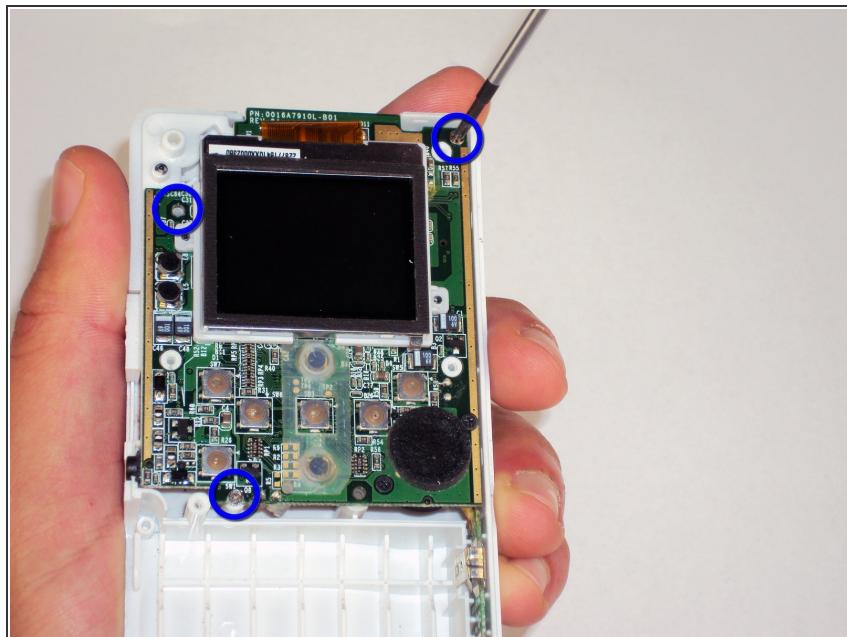

- Remove the 3 5mm screws securing the circuit board to the front shell with the #00 Phillips screwdriver.


## Step 7

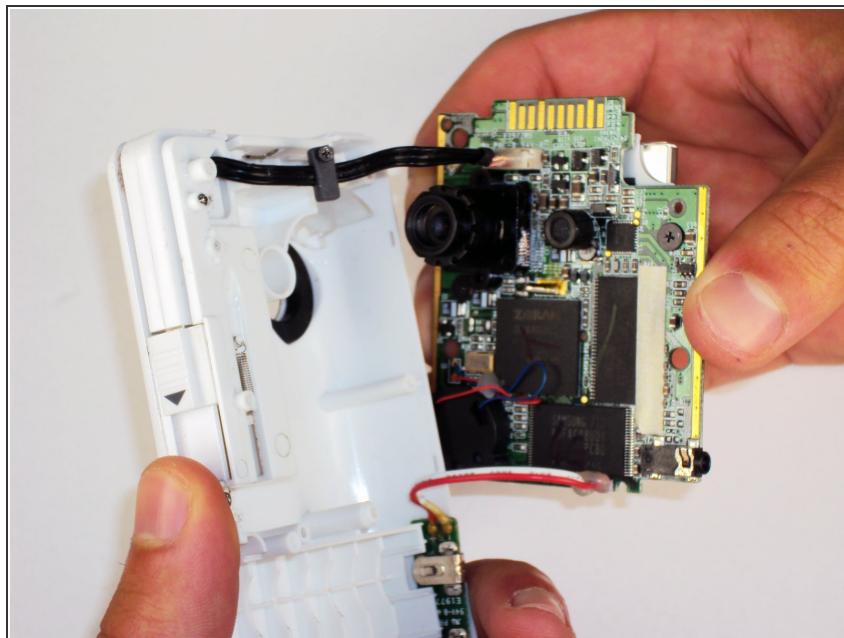

- Slowly lift the left side of the circuit board.


 Do not attempt to remove the circuit board completely yet. It is still connected to the device.

## Step 8

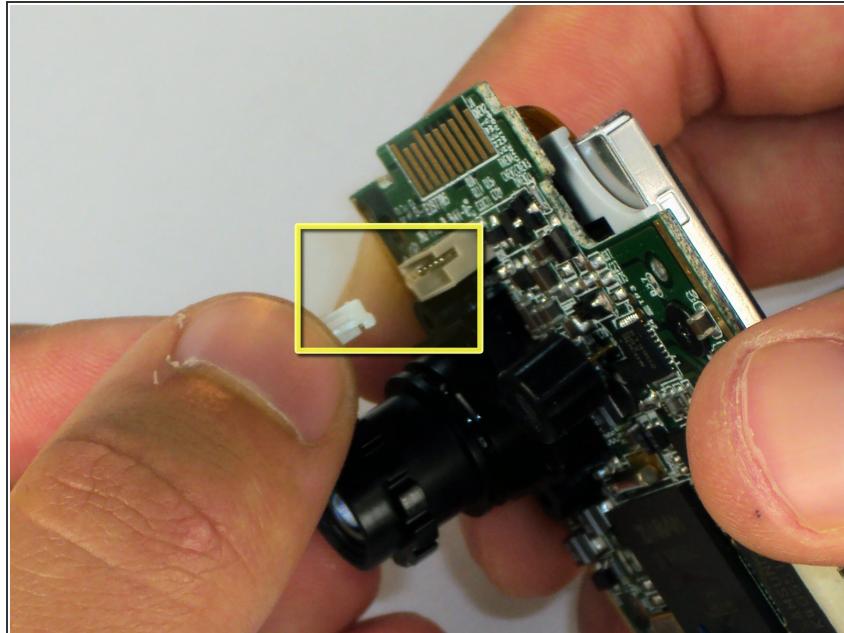


- Disconnect the USB port cable from the back side of the circuit board.

## Step 9

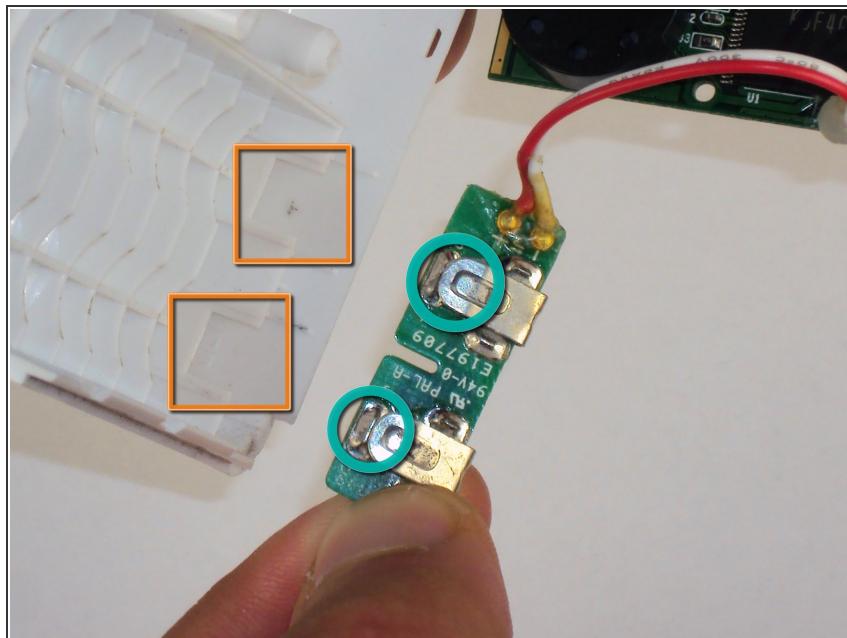


- Slide out the battery contacts.
  - Battery contacts
  - Slot where battery contacts were located

## Step 10 — LCD Screen

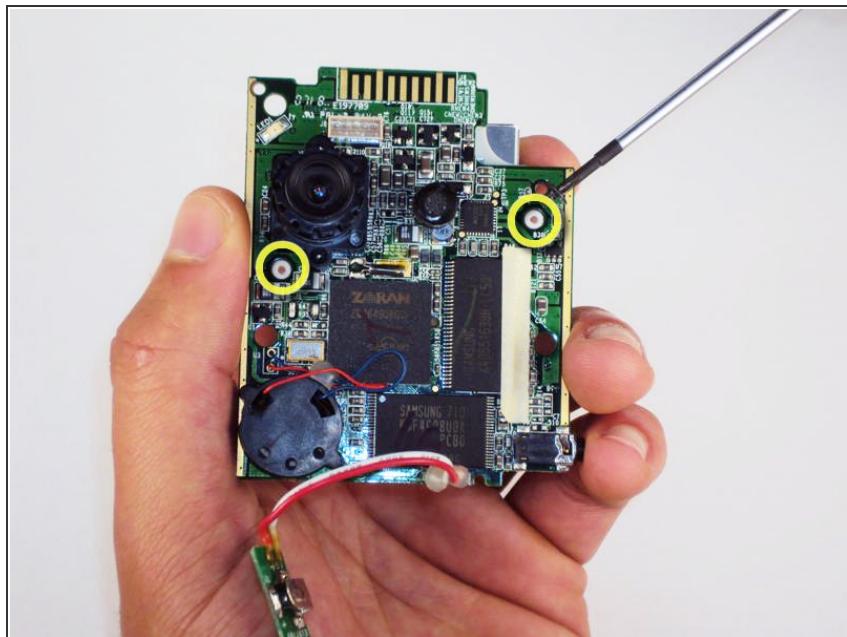


- With the LCD screen facing away from you, remove the 2 bronze 3 mm screws securing the LCD using the #00 Phillips screwdriver.

## Step 11

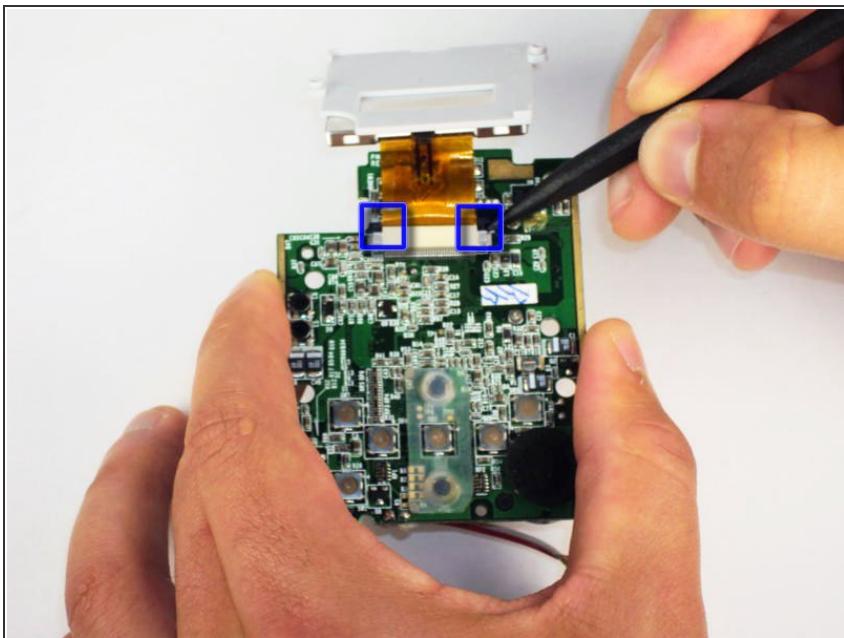

- Flip over the circuit board and unlock the two black tabs on the ribbon connector by sliding them upwards.

## Step 12

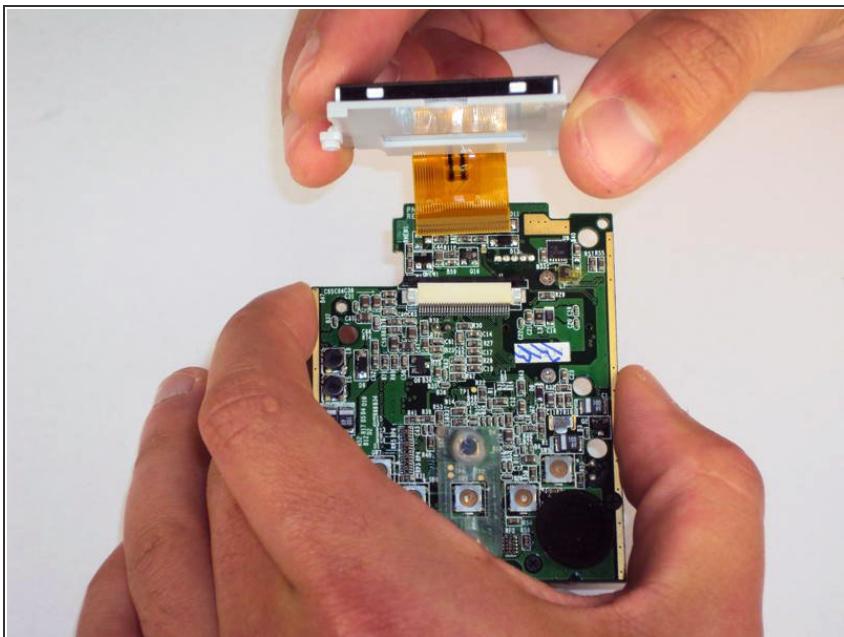

- Gently pull out ribbon cable.

**⚠** If the ribbon cable does not come out easily you may not have fully unlocked the ribbon cable connector in the previous step.

**i** The LCD screen is now removed and can be replaced.

To reassemble your device, follow these instructions in reverse order.