



HP Spectre x360 13-ac023dx Fan Replacement

How to replace the fan in a HP Spectre x360 13-ac023dx.

Written By: Jonathan



INTRODUCTION

If your HP Spectre x360 13-ac023dx laptop is overheating after trouble shooting for possible errors, use this guide to replace the cooling fan.

TOOLS:

- [Phillips #000 Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)
- [T5 Torx Screwdriver](#) (1)

Step 1 — Battery




- Flip the laptop over so the model sticker faces the ceiling.

Step 2




- Use a Torx #5 screwdriver to remove the six 3.5 mm screws holding the back cover to the laptop.

Step 3

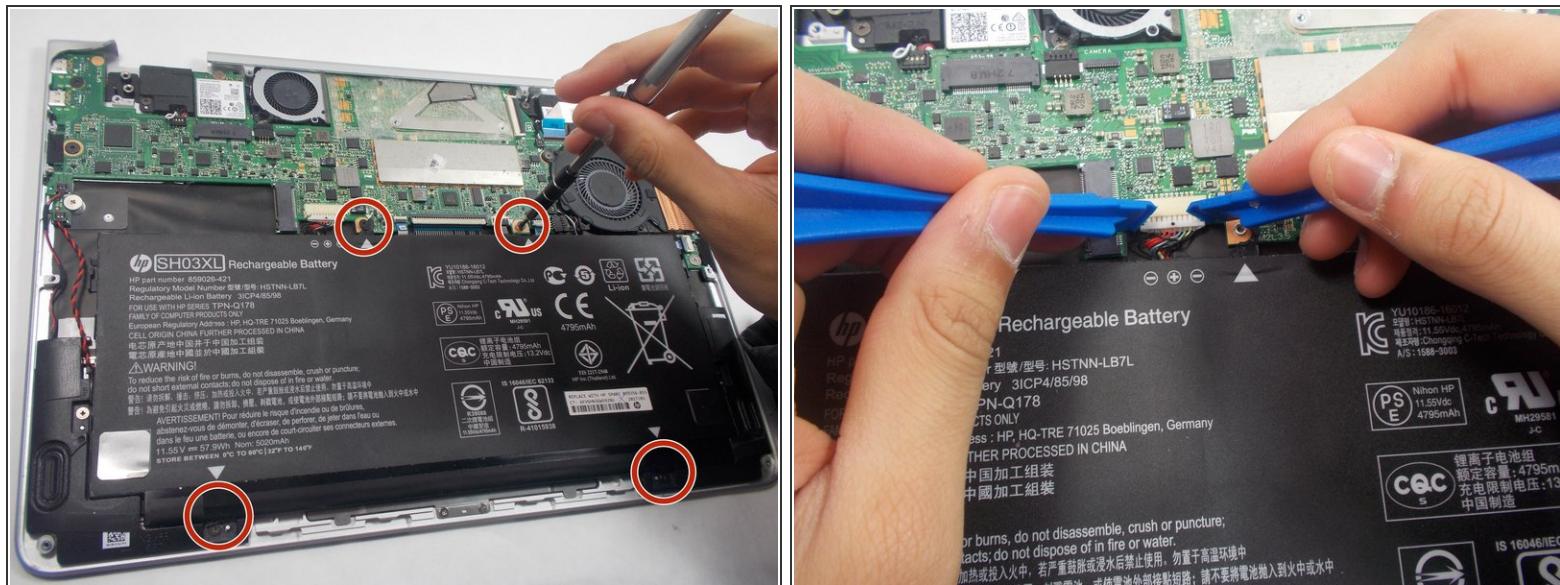


- Use the Phillips #000 screwdriver to remove the four 3.5 mm screws holding the battery.
- After removing the screws, detach the battery wire from the mother board with the iFixit opening tool.
- Then, carefully lift the battery off with the iFixit opening tool.

Step 4 — Fan

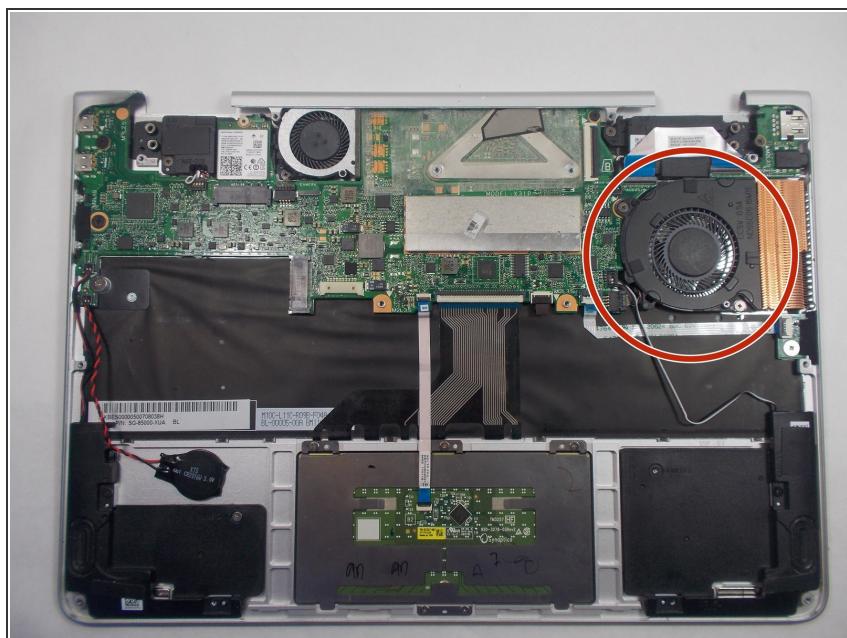


- Locate the Cooling Fan in the device.

Step 5

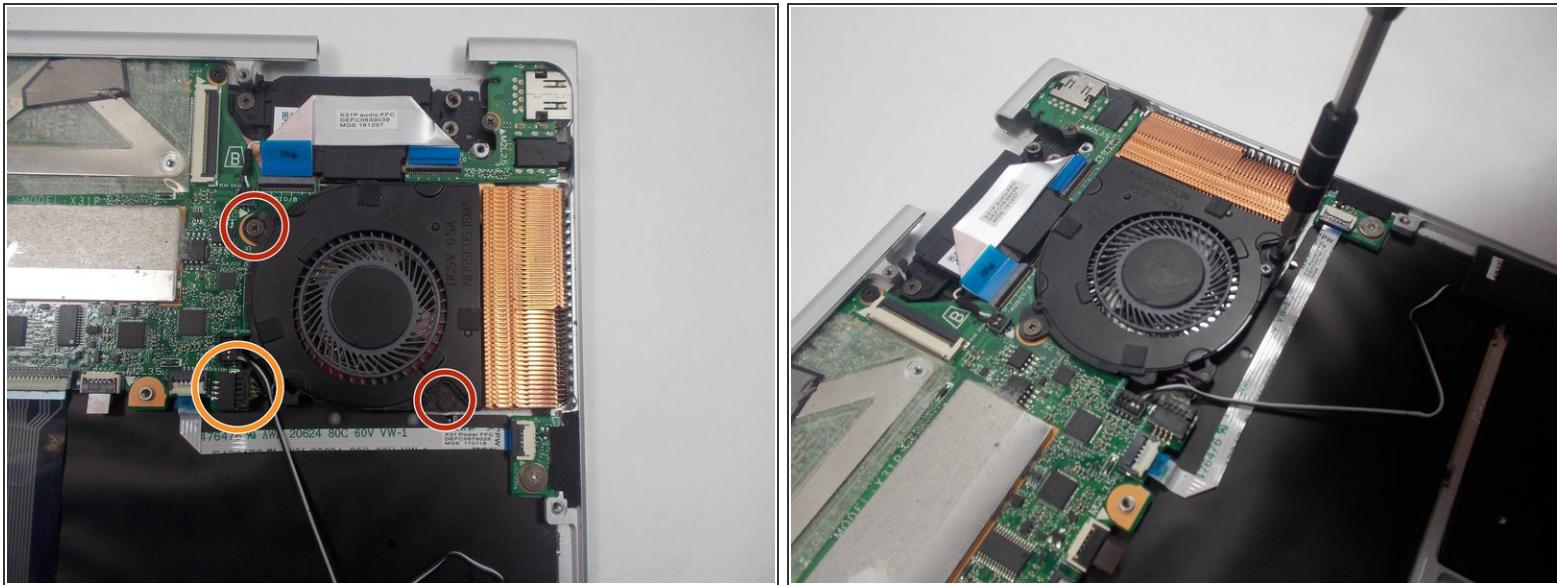

- Use the Phillips #000 screwdriver to remove the 3mm screws holding the fan in place.
- Remove the wires connecting to the motherboard, using the iFixit opening tool.
- *(i)* The iFixit Opening Tool is not required, but recommended

Step 6

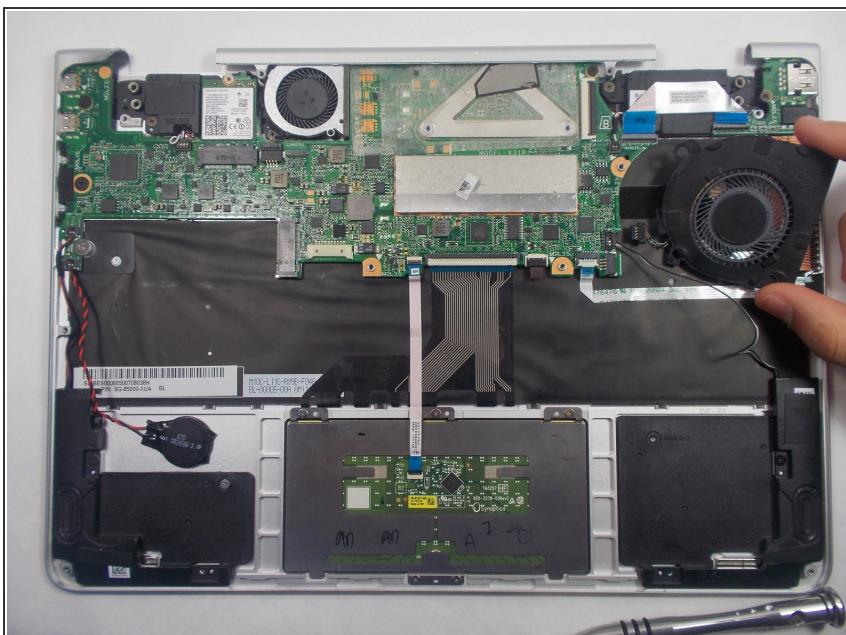

- Remove the Cooling Fan.

To reassemble your device, follow these instructions in reverse order.