




HP Stream 13-c110nr WLAN Module Replacement

The WLAN repair guide will assist the user in removal and installation of the WLAN module for the HP Stream 13-c110nr.

Written By: Stacey Deel

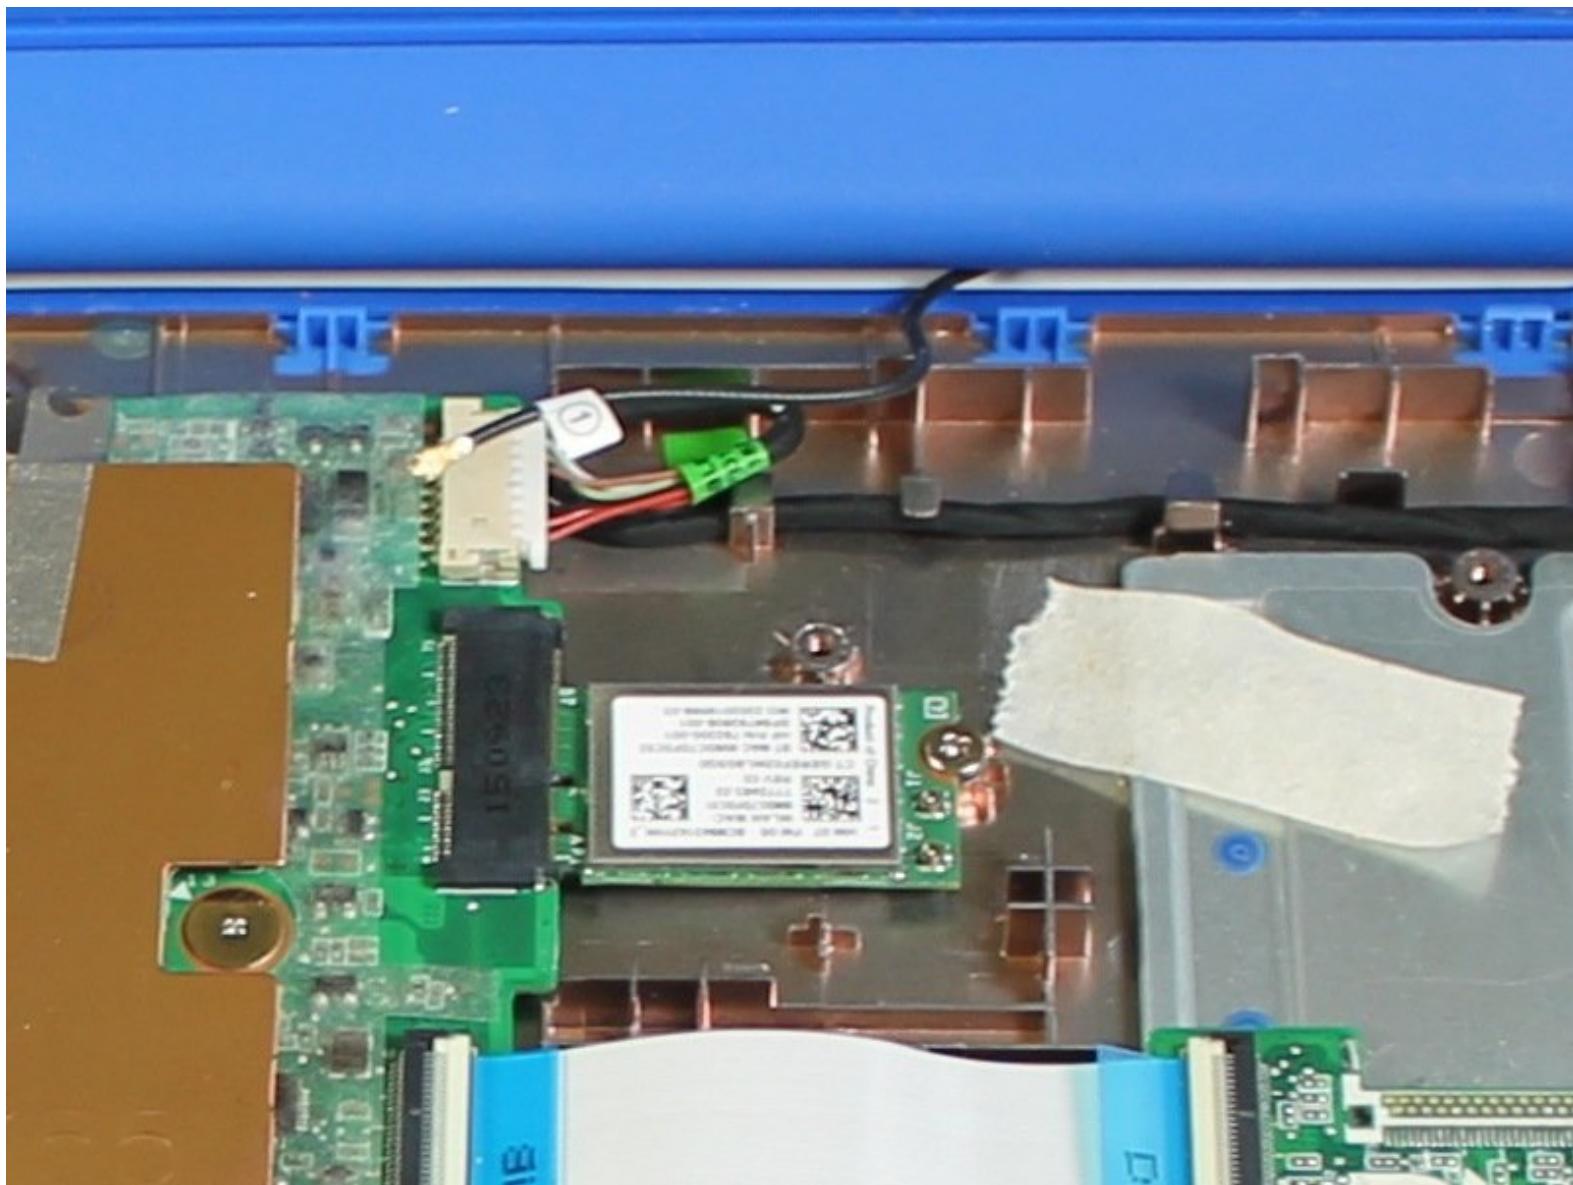

This document was generated on 2020-01-19 10:02:58 PM (MST).

INTRODUCTION

The WLAN repair guide will assist the user in removal and installation of the WLAN module for the HP Stream 13-c110nr.

TOOLS:

- [Phillips #0 Screwdriver](#) (1)
- [Spudger](#) (1)
- [Pick Tool](#) (1)
- [Magnetic Project Mat](#) (1)

Step 1 — Top Cover/Keyboard



- Close the device.
- Remove AC adapter plug from electrical outlet.
- Remove AC adapter from device.
- Turn the device off.
- Unplug all external devices from device.


i If you are unsure whether the computer is off or in hibernation mode, start the computer and then shutdown the operating system.

Step 2



- Turn the device upside down with the back facing towards you.

Step 3

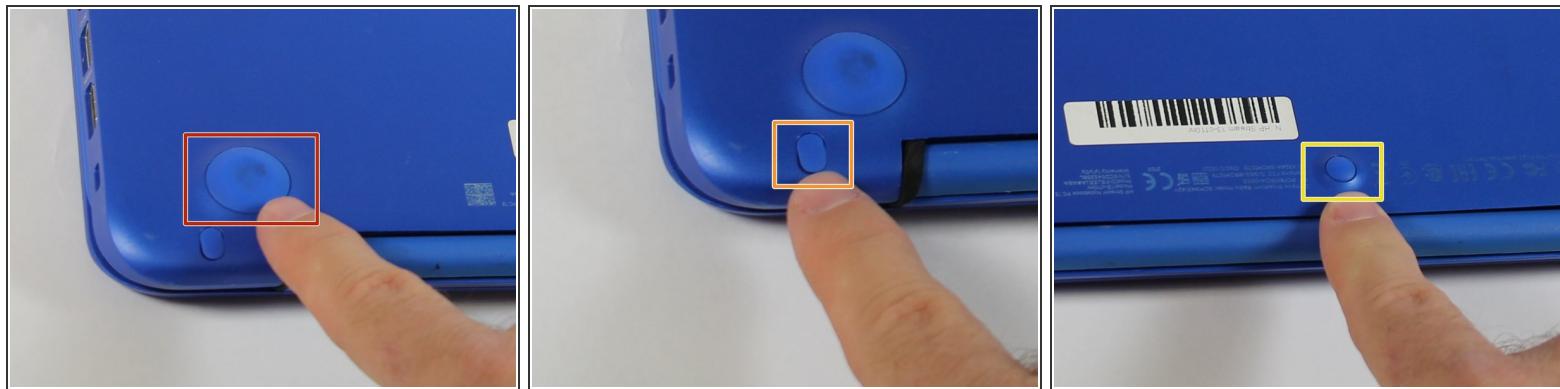

- Use a pick to remove the two (2) large computer feet along the back edge of the device.
- Use a pick to remove the two (2) small computer feet.
- Use a pick to remove the one (1) screw cover.
- Place rubber computer feet in safe place for reassembly.

Step 4



- Remove the thirteen (13) Phillips P0 PM2.5x6.0 mm screws.
- Place the thirteen (13) screws on magnetic mat for reassembly.

Step 5



- Turn the device over with the front facing towards you.
- Open the device as shown.


Step 6



- Insert the Spudger between the Top Cover and Bottom Cover to lift the front edge until it separates from the Bottom Cover.



(i) Do not completely remove the Keyboard/Top cover from the Bottom cover yet.

Step 7

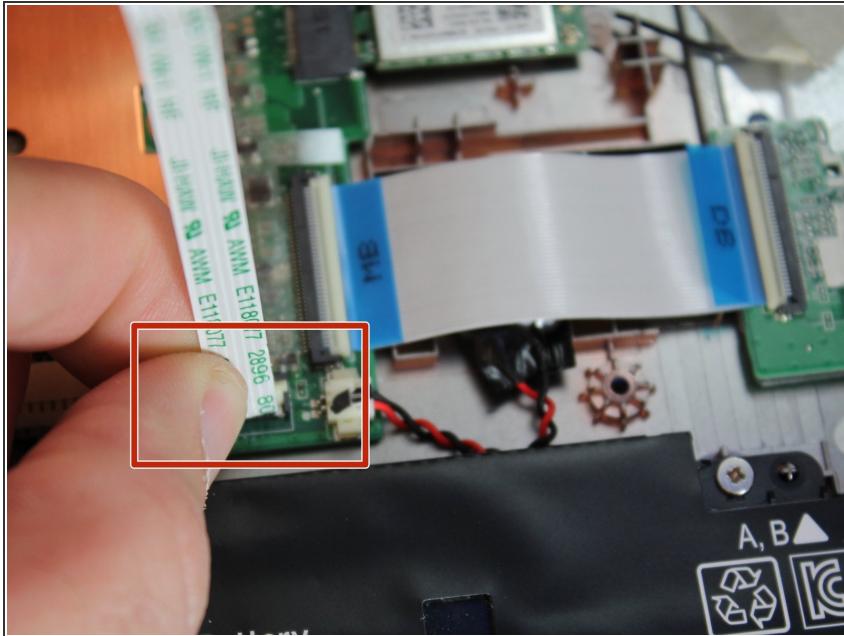



- Disconnect the Touchpad cable.

Step 8

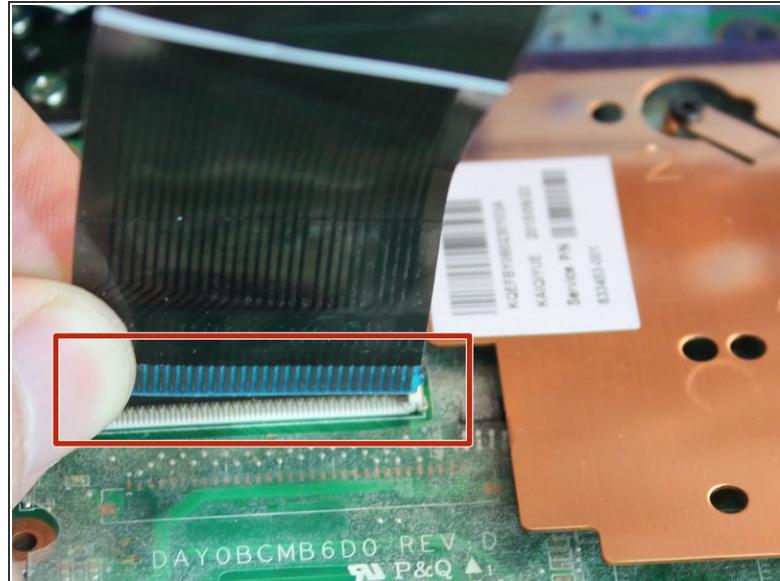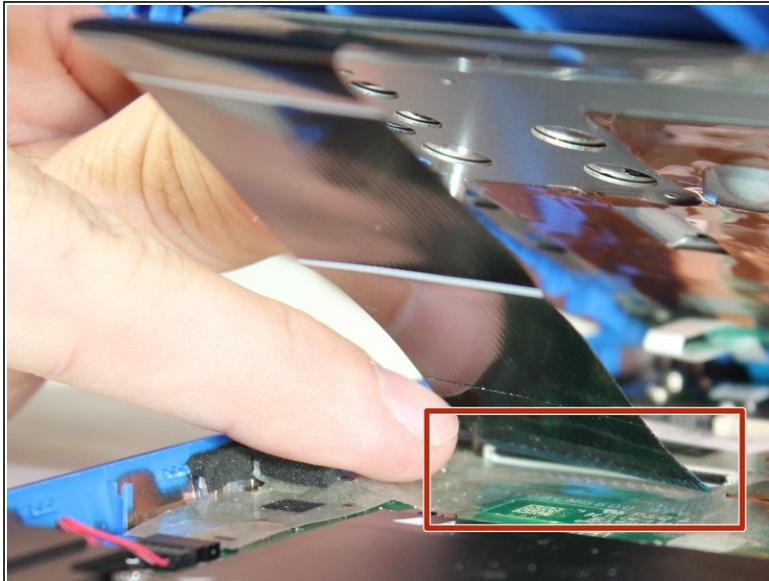


- Disconnect the Keyboard Cable.

Step 9

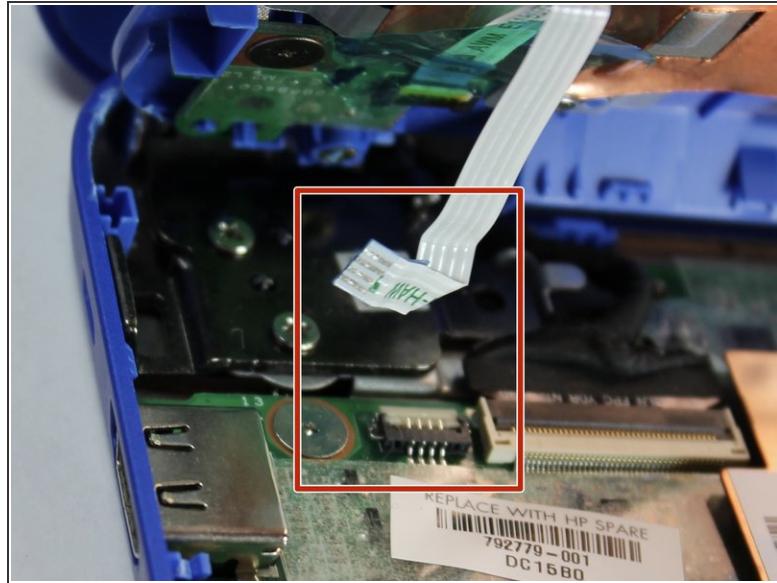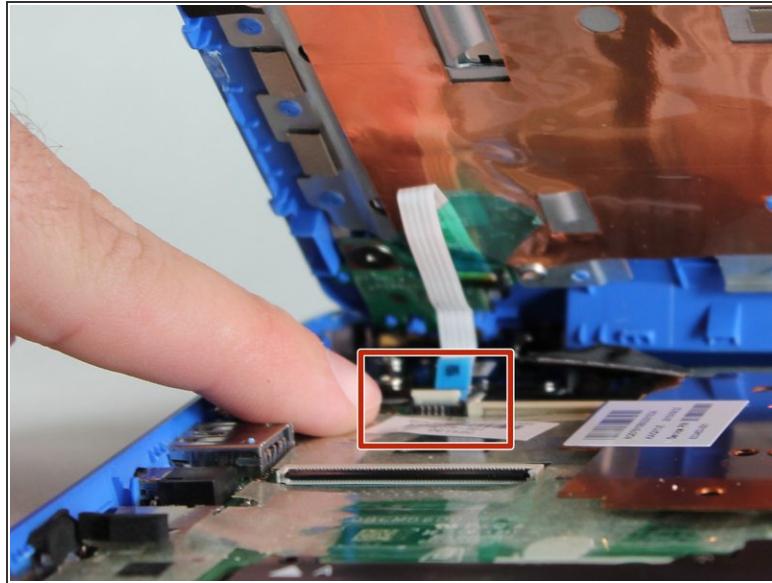

- Disconnect the Power connector cable.

Step 10

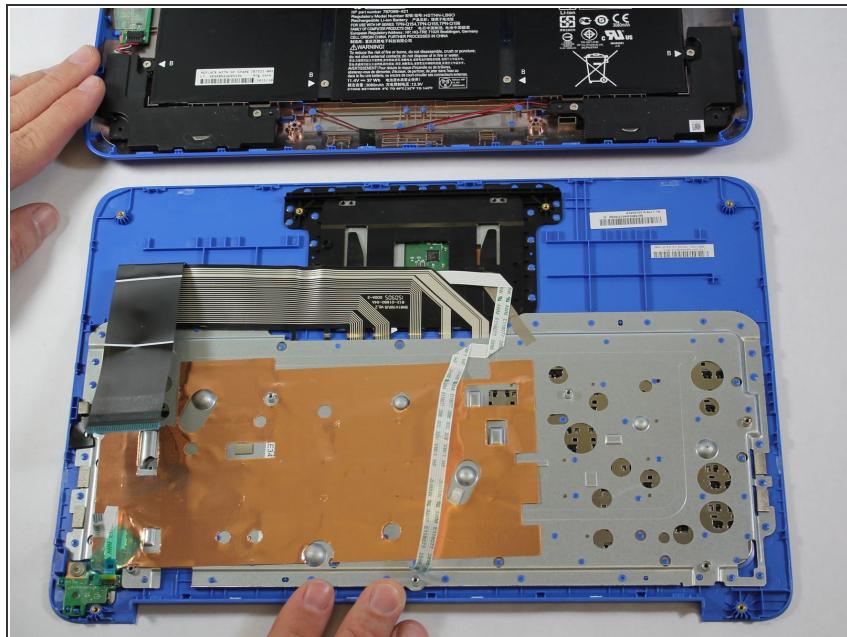


- Remove the Keyboard/Top Cover from the device.

Step 11 — WLAN Module



- Disconnect the WLAN antenna cable from the WLAN module.

Step 12

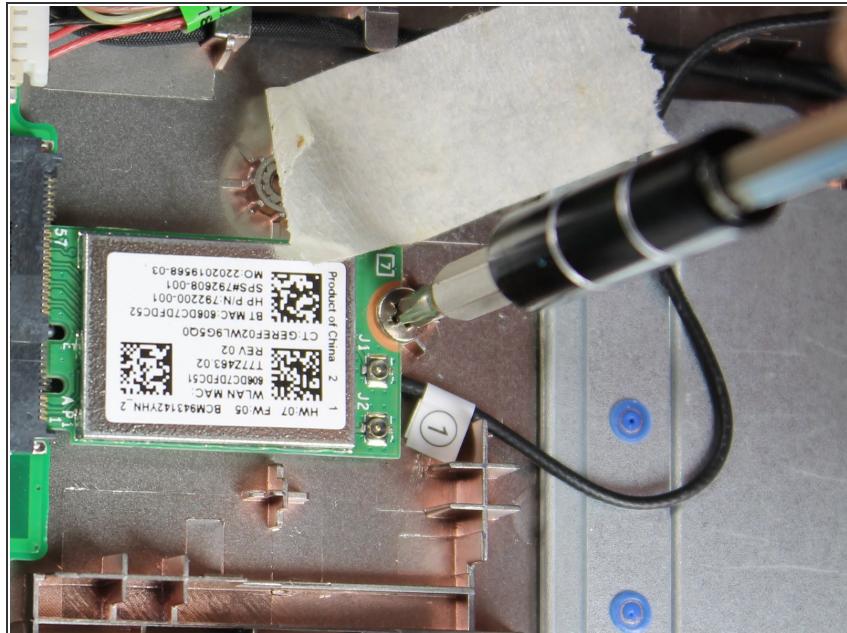

- Remove one (1) Phillips P0 PM2.0x3.0 mm screw.
- Place one (1) screw on magnetic mat for reassembly.

Step 13



- Remove the WLAN Module from device.

To reassemble your device, follow these instructions in reverse order.