




HTC Ozone Motherboard Replacement

Remove motherboard from the plastic phone casing.

Written By: Marco Jokada

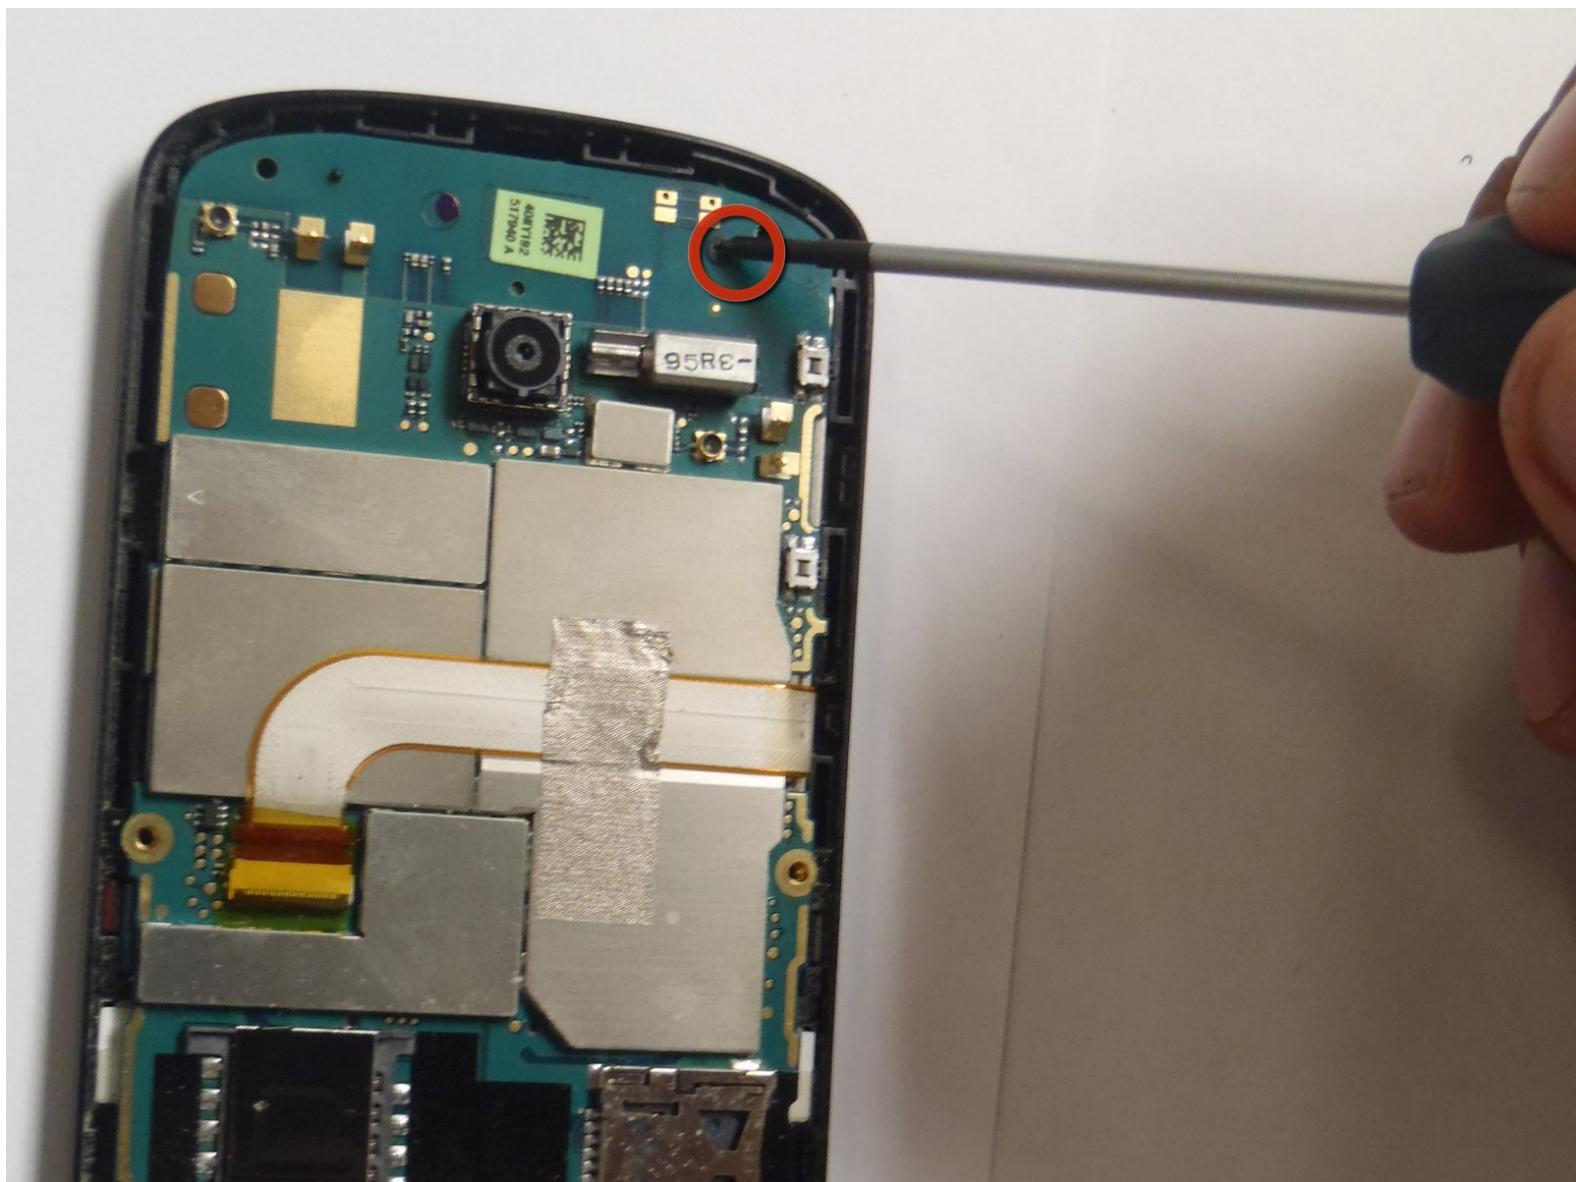

INTRODUCTION

The motherboard is the main internal component which integrates all the other internal components (i.e. led display, processor, keyboard, etc.)

TOOLS:

- [Phillips #0 Screwdriver \(1\)](#)
- [iFixit Opening Tools \(1\)](#)

Step 1 — Rear Battery Cover



- Flip the phone over to have the rear cover facing up.
- The camera lens should be towards the top of the phone.

Step 2



- Slide the cover up, towards the top of phone, to unlock the battery cover.
- Lift the cover off phone and remove it.

Step 3 — Battery



- Use your finger to push the top of the battery downwards and lift the battery out of the phone.

Step 4 — Frame




- Remove the six Torx #5 screws that are securing the rear frame.

Step 5




- Pry the frame open, releasing the eight plastic tabs around the edge of the frame, using the plastic opening tool.
(i) A plastic card can be used instead of the plastic opening tool.

Step 6 — Motherboard

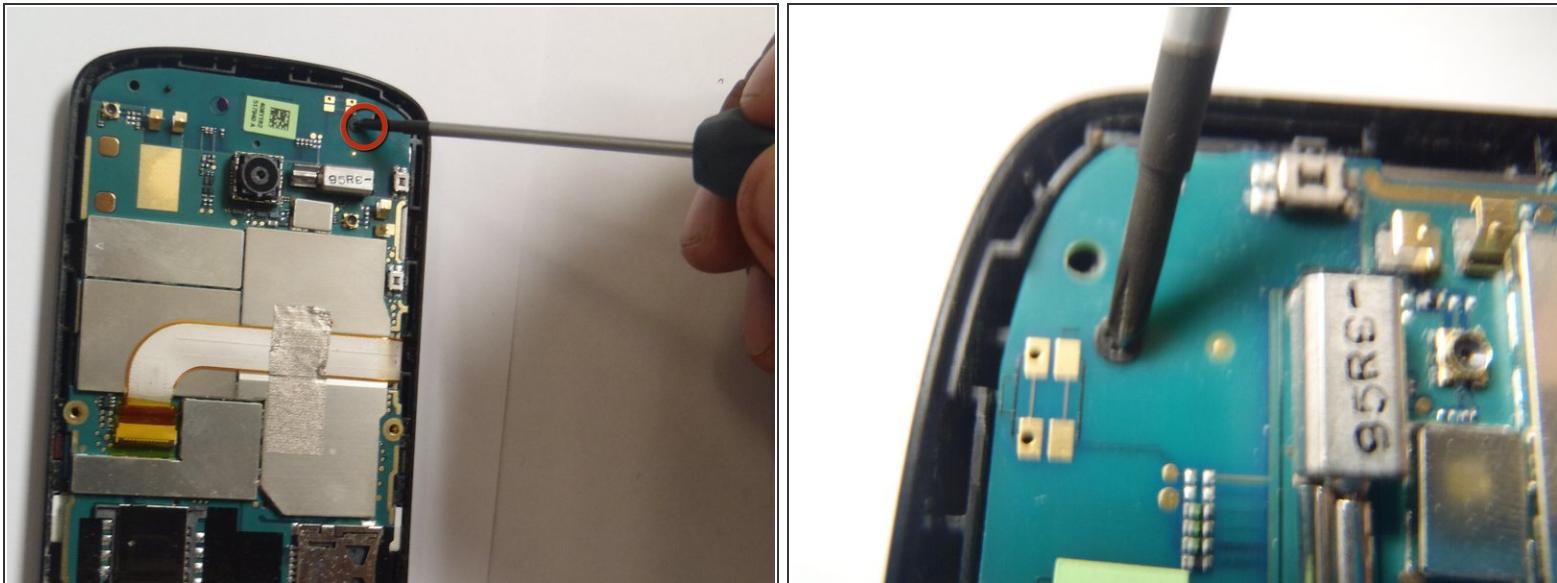

- Remove the single Phillips #0 screw that is securing the motherboard to the front case of the phone.

Step 7

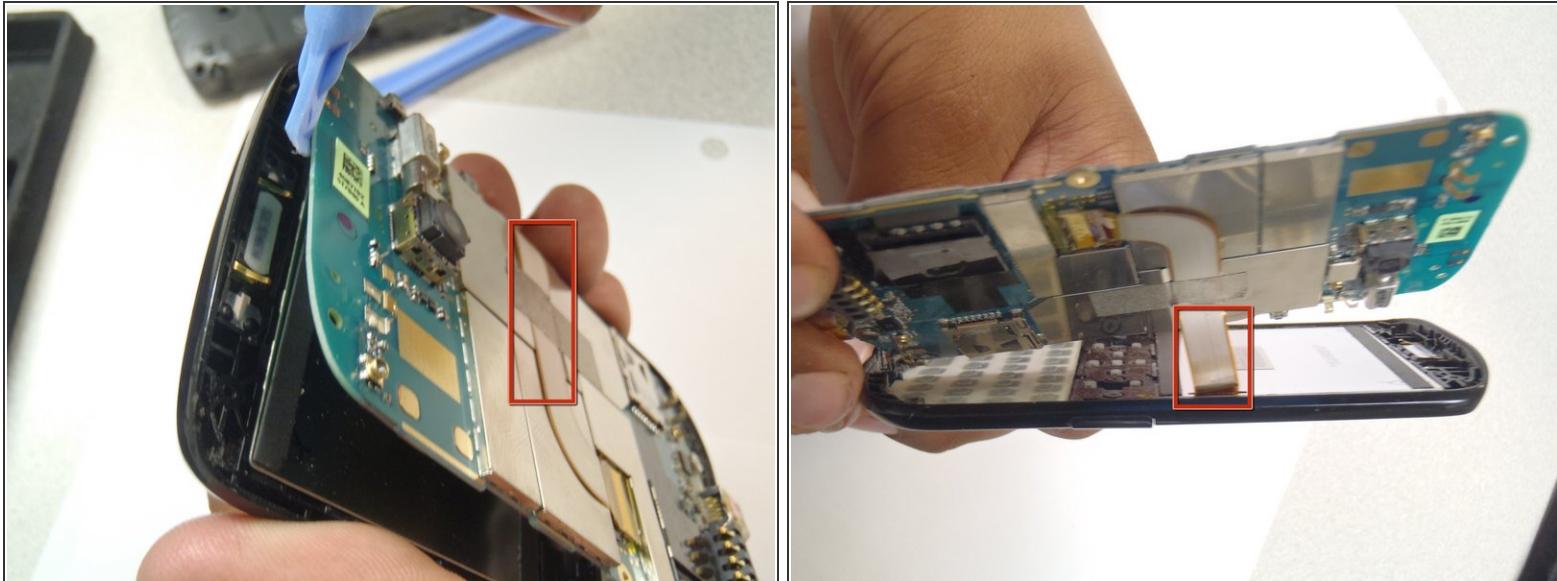

- Pry the motherboard away from the front of the plastic case using a plastic opening tool.

⚠ Be careful not to break the ribbon cable when prying away the motherboard.

Step 8



- Remove the plastic cover from the LCD display and the motherboard.

⚠ The Motherboard and the LCD are still attached together.

To reassemble your device, follow these instructions in reverse order.