



# Avaya™ Directory Enabled Management

Release 1.1.4  
Installation and Implementation

555-038-101  
Issue 5  
June 2002

**Copyright 2002, Avaya Inc.  
All Rights Reserved**

**Notice**

Every effort was made to ensure that the information in this document was complete and accurate at the time of printing. However, information is subject to change.

AUDIX, Avaya, CajunRules, DEFINITY, DEFINITY One, Intuity, MultiVantage, and VisAbility are registered trademarks and trademarks of Avaya Inc.

ALL OTHER TRADEMARKS MENTIONED IN THIS DOCUMENT ARE PROPERTY OF THEIR RESPECTIVE OWNERS.

**Preventing Toll Fraud**

“Toll fraud” is the unauthorized use of your telecommunications system by an unauthorized party (for example, a person who is not a corporate employee, agent, subcontractor, or is not working on your company’s behalf). Be aware that there may be a risk of toll fraud associated with your system and that, if toll fraud occurs, it can result in substantial additional charges for your telecommunications services.

**Avaya Fraud Intervention**

If you suspect that you are being victimized by toll fraud and you need technical assistance or support, in the United States and Canada, call the Technical Service Center’s Toll Fraud Intervention Hotline at 1-800-643-2353.

**How to Get Help**

For additional support telephone numbers, go to the Avaya Web site: <http://www.avaya.com/support/>

If you are:

- Within the United States, click *Escalation Lists*, which includes escalation phone numbers within the USA.
- Outside the United States, click *Escalation Lists* then click *Global Escalation List*, which includes phone numbers for the regional Centers of Excellence.

**Providing Telecommunications Security**

Telecommunications security (of voice, data, and/or video communications) is the prevention of any type of intrusion to (that is, either unauthorized or malicious access to or use of) your company’s telecommunications equipment by some party.

Your company’s “telecommunications equipment” includes both this Avaya product and any other voice/data/video equipment that could be accessed via this Avaya product (that is, “networked equipment”).

An “outside party” is anyone who is not a corporate employee, agent, subcontractor, or is not working on your company’s behalf. Whereas, a “malicious party” is anyone (including someone who may be otherwise authorized) who accesses your telecommunications equipment with either malicious or mischievous intent.

Such intrusions may be either to/through synchronous (time-multiplexed and/or circuit-based) or asynchronous (character-, message-, or packet-based) equipment or interfaces for reasons of:

- Utilization (of capabilities special to the accessed equipment)
- Theft (such as, of intellectual property, financial assets, or toll-facility access)
- Eavesdropping (privacy invasions to humans)
- Mischief (troubling, but apparently innocuous, tampering)
- Harm (such as harmful tampering, data loss or alteration, regardless of motive or intent)

Be aware that there may be a risk of unauthorized intrusions associated with your system and/or its networked equipment. Also realize that, if such an intrusion should occur, it could result in a variety of losses to your company (including but not limited to, human/data privacy, intellectual property, material assets, financial resources, labor costs, and/or legal costs).

**Responsibility for Your Company’s Telecommunications Security**

The final responsibility for securing both this system and its networked equipment rests with you - Avaya’s customer system administrator, your telecommunications peers, and your managers. Base the fulfillment of your responsibility on acquired knowledge and resources from a variety of sources including but not limited to:

- Installation documents
- System administration documents
- Security documents
- Hardware-/software-based security tools
- Shared information between you and your peers
- Telecommunications security experts

To prevent intrusions to your telecommunications equipment, you and your peers should carefully program and configure:

- Your Avaya-provided telecommunications systems and their interfaces
- Your Avaya-provided software applications, as well as their underlying hardware/software platforms and interfaces
- Any other equipment networked to your Avaya products.

**To order copies of this and other documents:**

Call: Avaya Publications Center

Voice 1.800.457.1235 or 1.410.568.3680

FAX 1.800.457.1764 or 1.410.891.0207

Write: Globalware Solutions

200 Ward Hill Avenue

Haverhill, MA 01835 USA

Attention: Avaya Account Management

E-mail: [totalware@gwsmail.com](mailto:totalware@gwsmail.com)

# Table of Contents

---

<b>Preface</b> .....	<b>vii</b>
The Purpose of this Guide .....	vii
Who Should Use this Guide .....	vii
Organization of this Guide .....	viii
Related Documentation/Training .....	viii
Conventions Used .....	ix
Getting Help .....	ix
<b>Chapter 1 — Introduction</b> .....	<b>1</b>
Overview of Avaya Directory Enabled Management (DEM) .....	1
DataStore Managers .....	3
Synchronization Engine .....	4
LDAP Data Store .....	4
DEM Administrator .....	4
DEM Browser .....	5
New Features in This Release .....	6
<b>Chapter 2 — Installing Avaya Directory Enabled Management (DEM)</b> .....	<b>7</b>
Requirements .....	7
Upgrading from an Earlier Release .....	9
Before You Begin .....	10
Planning Form .....	12
Install the Software .....	15
Planning Form .....	20
<b>Chapter 3 — Configuring Avaya Directory Enabled Management (DEM)</b> .....	<b>23</b>
Configuring a New DEM .....	23
Upgrading from an Earlier Release .....	25
Procedure 1: Configure the LDAP Schema .....	28
Configure the LDAP Schema for Active Directory .....	28
Configure the LDAP Schema for Netscape or NDS .....	31
Procedure 2: Start the DEM Administrator Application .....	32
Procedure 3: Configure GWAgent .....	32
Procedure 4: Activate the Synchronization Engine .....	35
Procedure 5: Activate and Attach the DEM DataStore Manager ..	36
Procedure 6: Configure Additional DEM DataStore Managers ..	37

Procedure 7: Activate and Attach the DEFINITY DataStore Manager 40  
 Procedure 8: Configure Additional DEFINITY DataStore Managers .41  
 Procedure 9: Activate and Attach the Intuity DataStore Manager . .44  
 Procedure 10: Configure Additional Intuity DataStore Managers . .45  
 Procedure 11: Configure the DEM Browser . . . . .48  
 Procedure 12: Create a New DEM Administrator Login . . . . .49  
 Procedure 13: Administer DEM . . . . .50

**Chapter 4 — Troubleshooting . . . . . 51**

Troubleshooting the Installation . . . . .52  
     Problem 1: You receive the message: “Catastrophic Error”  
         or “Error Extracting Support Files” . . . . .52  
     Problem 2: You receive the message: “The InstallShield  
         engine (iKernel.exe) could not be installed.” . . . . .52  
 Troubleshooting DEM Administrator Startup . . . . .53  
     Problem 1: DEM Administrator will not start . . . . .53  
     Problem 2: DEM Administrator attempts to create the DSN . . .54  
     Problem 3: After the system reboots, the gwcfg window  
         appears and “hangs” . . . . .54  
     Problem 4: When you try to start DEM Administrator,  
         the application “hangs” . . . . .55  
     Problem 5: The system is unable to reattach to the running  
         DSMs, SE, and DEM Administrator . . . . .56  
     Problem 6: A console alert appears, indicating that the  
         connection to the monitor failed . . . . .56  
     Problem 7: You receive a message that the security host  
         is not found . . . . .57  
     Problem 8: DEM Administrator does not respond . . . . .57  
     Problem 9: You receive a message that DEM Administrator  
         cannot connect to a service . . . . .57  
 Troubleshooting DEM Administrator Login . . . . .58  
     Problem 1: Login Unsuccessful . . . . .58  
     Problem 2: DEM Administrator window does not appear  
         after you log in . . . . .58  
     Problem 3: When you log in, you are prompted to enter a  
         new password . . . . .59  
 Troubleshooting the Synchronization Engine . . . . .60  
     Problem 1: Secondary level synchronization errors occur . . . .60  
     Problem 2: Controlled types are not found . . . . .60  
     Problem 3: The Lexer.cfg file is not found . . . . .60  
 Troubleshooting DataStore Managers . . . . .61  
     Problem 1: A DataStore Manager fails to activate, and the  
         “<DSM Name> failed to launch properly” message appears . .61  
     Problem 2: A DataStore Manager fails to activate, and no  
         message appears . . . . .62  
     Problem 3: A DataStore Manager activates, but it fails to  
         attach or run . . . . .63  
     Problem 4: The Protocol Adapter module failed to load . . . . .64

Troubleshooting GWAgent .....65  
    Problem 1: You cannot start GW Agent .....65  
    Problem 2: You cannot connect to LDAP .....65  
    Problem 3: The triggers are unavailable and/or unpopulated . .65  
    Problem 4: All of the triggers fail .....65  
Troubleshooting the Scheduler .....66  
    Problem 1: Scheduled events will not run .....66

***Glossary and Abbreviations* ..... 67**

***Index*..... 71**

**Table of Contents**

---

# Preface

---

Welcome to Avaya™ Directory Enabled Management (DEM), part of the Avaya VisAbility™ Management Suite 1.0. This chapter provides an introduction to the structure and assumptions of this guide.

## The Purpose of this Guide

This guide describes how to install and configure Avaya Directory Enabled Management (DEM).

## Who Should Use this Guide

This guide is intended for technicians who are installing DEM at a customer location. It is assumed that the technician is experienced with the following subjects:

- One of the following operating systems
  - Microsoft® Windows NT® Server 4.0 with Service Pack 4 or later
  - Microsoft Windows® Server 2000
- One of the following LDAP services:
  - Novell® NDS® eDirectory™ 8.5
  - Netscape® Directory Server Version 4.12
  - Microsoft Active Directory™
- local area networks (LANs)
- Avaya voice server installation and implementation
- INTUITY™ AUDIX® system administration

Professional services are available through your authorized Avaya dealer to support these requirements.

## Organization of this Guide

This guide consists of the following chapters:

- **Preface** - This chapter describes the intended audience for this document and how to get support when installing and/or administering DEM.
- **Chapter 1: Introduction** - This chapter provides a brief introduction to DEM.
- **Chapter 2: Installing Avaya Directory Enabled Management** - This chapter describes how to install DEM.
- **Chapter 3: Configuring Avaya Directory Enabled Management** - This chapter describes how to configure DEM.
- **Chapter 4: Troubleshooting** - This chapter provides information about possible error conditions and how to respond to them when you install and configure DEM.

## Related Documentation/Training

The following user documentation and training materials are available for installing and administering DEM:

- **Avaya Directory Enabled Management Online Training Course**

This online training course is available at <http://www.avaya.com/support>.

- **Avaya Directory Enabled Management Administration**

This Portable Document Format (PDF) document is located in the Docs folder in the Avaya VisAbility™ Management Suite 1.0 CD. To view this document, you will need Adobe Acrobat® Reader 5.0 or later. You can install Adobe Acrobat Reader 5.0 from the Avaya VisAbility™ Management Suite 1.0 CD or download it from the Internet at <http://www.adobe.com/>.

---

## Conventions Used

The following conventions are used in this document:

- Commands and text you should enter appear ***in this style of type***.
- Components of dialog boxes (such as boxes and buttons) and prompts that appear on the screen appear **in this style of type**.
- The terms *option buttons* and *radio buttons* refer to the same object.

## Getting Help

For the most up-to-date troubleshooting information, go to <http://www.avaya.com/support>.

If you have questions about or problems with DEM that this guide does not resolve, call Avaya technical support at 1800-242-2121 (USA only) or your local authorized Avaya dealer.



# 1 Introduction

---

This chapter describes Avaya™ Directory Enabled Management (DEM) and its components.

## Overview of Avaya Directory Enabled Management (DEM)

Avaya Directory Enabled Management (DEM) is software that “LDAP-enables” voice server data and Intuity system data, providing real-time, integrated, directory-based read/write access to voice server data, Intuity data, and data derived from enterprise sources (such as corporate databases). DEM interfaces with the voice server (such as Avaya MultiVantage™ on a DEFINITY® Server SI and Avaya™ S8100 Media Server with CMC1 Media Gateway), the Intuity system, a company’s LDAP server, the DEM Administrator application, and DEM client applications (which are LDAP-based applications that enable users to view and modify the DEM data).

DEM consists of the following components:

- DataStore Managers (DSMs)
- Synchronization Engine
- LDAP Data Store
- DEM Administrator
- DEM Browser

Figure 1-1 shows the structure of DEM.

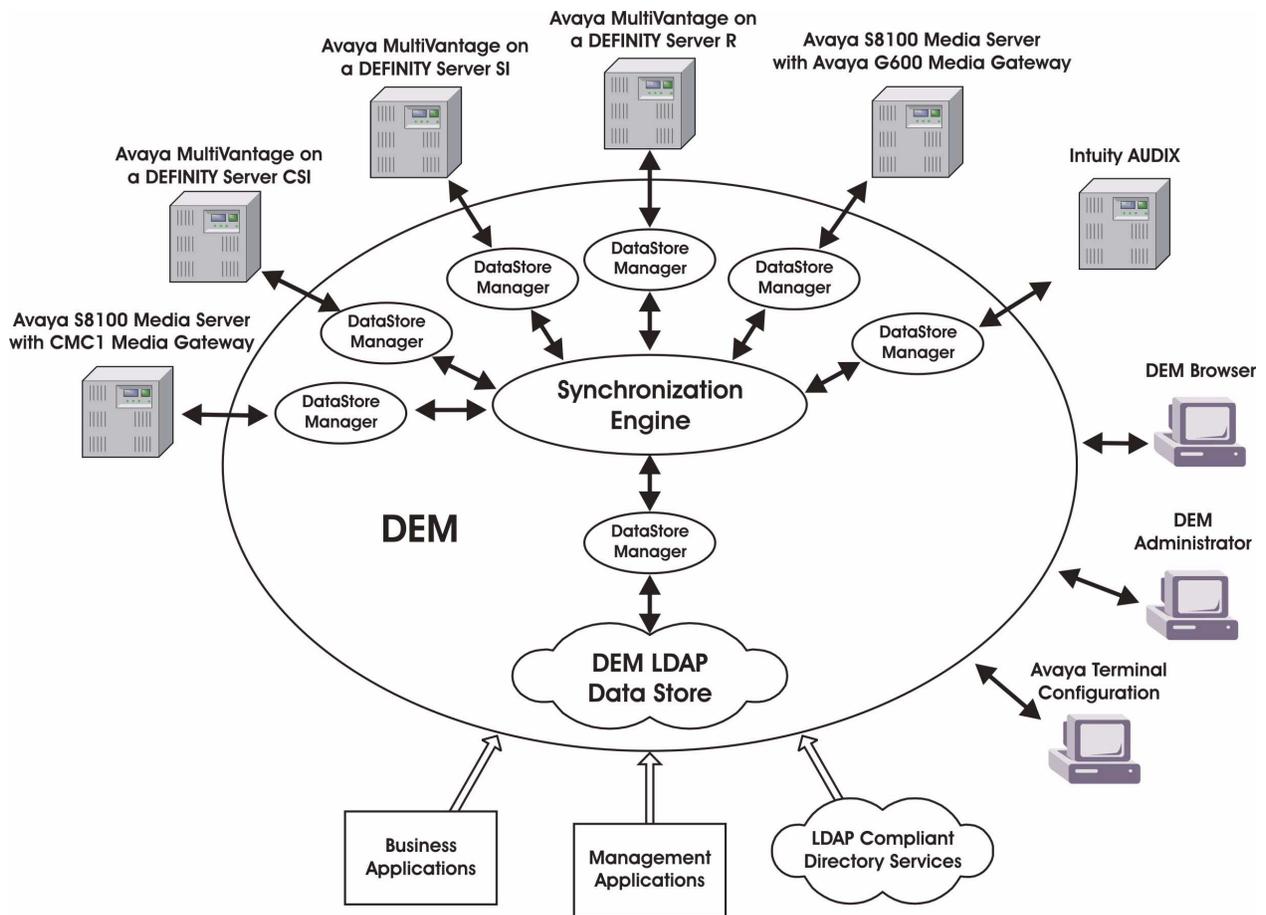


Figure 1-1. Avaya Directory Enabled Management (DEM)

---

## DataStore Managers

DataStore Managers are software processes that interface with each device type that connects to DEM. A DataStore Manager is the “connector technology” for DEM, enabling different DEM devices (such as voice servers, Intuity systems, and LDAP servers) to communicate with each other. Each DataStore Manager contains low-level mapping information that converts device-specific data types to DEM data types (also known as *DEM virtual objects*). The DEM virtual objects are composed of the “common data representation language” of DEM, enabling all DEM devices to communicate with one another. For example, when a change is made to the voice server data, the DEFINITY DataStore Manager takes the changed data from the voice server, converts it into a DEM schema object (which can be understood by every other DataStore Manager on DEM), and sends this data change (packaged in a *ChangeDescriptor*) to the Synchronization Engine. A *ChangeDescriptor* is the transport vehicle for a package of data (that is, a data change) through DEM. DEM uses the *ChangeDescriptor* to keep track of the device supplying the data change and the transaction number.

Each device on DEM must have its own DataStore Manager. For example, the voice server has its own DataStore Manager, and your company’s LDAP server has its own DataStore Manager. As the DEM Administrator, it is your responsibility to define, activate, and monitor the DataStore Managers for each DEM device.

Each DataStore Manager monitors its associated device. Every time a data change is made on the device, the DataStore Manager creates a *ChangeDescriptor* that describes the data change, and then sends the *ChangeDescriptor* to the Synchronization Engine, which is the hub of DEM. The *ChangeDescriptor* is propagated to the rest of the system by the Synchronization Engine based on the routing and mapping rules you define for the Synchronization Engine.

Each DataStore Manager receives *ChangeDescriptors* from the Synchronization Engine for DEM types to which it subscribes.

## Synchronization Engine

The Synchronization Engine, the heart of DEM, is a software process that synchronizes changes between native device data (for example, data from a voice server) and data from enterprise directories according to rules that you define.

When a change is made in a device (such as the voice server), the DataStore Manager creates a ChangeDescriptor and sends that ChangeDescriptor to the Synchronization Engine. The Synchronization Engine then applies its rules to the ChangeDescriptor and determines whether that data change affects data used by other devices on DEM. Depending on its rules, the Synchronization Engine routes the ChangeDescriptor to the appropriate DataStore Managers in the system. Those DataStore Managers then convert the virtual object in the ChangeDescriptor to the native data type of the device, and the appropriate data is changed in the device, thereby synchronizing the data across the system.

## LDAP Data Store

DEM provides an LDAP server that stores all of the DEM data. However, DEM can be configured to store its data in an existing LDAP directory service on your LAN. As changes are made to data in the DEM devices, the LDAP data store is continuously updated with these changes.

## DEM Administrator

DEM Administrator is a software application that enables you to configure, monitor and control DEM. Some of the tasks you can perform via DEM Administrator include:

- synchronize DEM data
- create, manage, and control DataStore Managers
- create, manage, and control Synchronization Engines
- monitor messages generated by DataStore Managers and/or the Synchronization Engine
- manage DEM Administrator users

## DEM Browser

DEM Browser is a web-based application that enables users to view and modify data in the DEM LDAP data store. Using the DEM Browser, users can perform the following tasks in the LDAP data store:

- view LDAP objects
- search for LDAP objects
- add LDAP objects
- modify LDAP objects
- delete LDAP objects

## New Features in This Release

DEM has the following new features:

- **Support for Python maps**

DEM now uses Python maps as the type-to-type mapping mechanism. Python maps offer greater flexibility and power than the legacy mapping mechanism used in previous releases. DEM still supports the legacy mapping mechanism.

- **“Out-of-the-box” DSM-level rules for the DEM LDAP DSM**

The DEM LDAP DSM now has DSM-level rules running by default. You can add these rules to other DSMs.

- **AdapterDSM**

DEM now provides AdapterDSM, a special type of DSM that enables third-party applications to “plug into” DEM change notifications. AdapterDSM allows a third-party application to “listen” to DEM activity with a publisher/subscriber model, enabling that application to know when DEM has changed the LDAP representation of the data in which the application is interested. Previously, third-party applications were required to poll the LDAP repository to determine whether information had changed. For more information about AdapterDSM, see the AdapterDSM Technical Notes in the Docs folder in DEM installation directory.

- **Avaya Terminal Configuration**

DEM now provides Avaya Terminal Configuration, a DEM client application that enables users to customize the settings for their telephone from their web browser.

# 2 Installing Avaya Directory Enabled Management (DEM)

---

This chapter describes how to install DEM.

## Requirements

DEM requires the hardware and software listed below.

**\* Note:** Note that system performance may be adversely affected by lower system speeds and lower memory capacities.

- An IBM-compatible PC with the following hardware:
  - a Pentium® III 500 MHz or higher processor
  - a hard disk with at least 8 GB of space available (13 GB recommended)
  - 128 MB of RAM (256 MB recommended)
  - a network interface card to connect the PC to the company's local area network (LAN)
  - a 56Kbps or higher modem (for required remote support)
  - a CD-ROM drive, a Windows compatible VGA (or better) adapter, and a pointing device
- one of the following operating systems:
  - Microsoft Windows NT Server 4.0 with Service Pack 4 or later
  - Microsoft Windows 2000 Server
- one of the following LDAP services:
  - Novell NDS eDirectory 8.5
  - Netscape Directory Server Version 4.12
  - Microsoft Active Directory

- pcANYWHERE® Version 9.0 or later (for required remote support)
- Any of the following Avaya servers connected to the company's LAN:
  - Avaya MultiVantage on a DEFINITY Server CSI
  - Avaya MultiVantage on a DEFINITY Server SI
  - Avaya MultiVantage on a DEFINITY Server R
  - Avaya S8100 Media Server with CMC1 Media Gateway
  - Avaya S8100 Media Server with Avaya G600 Media Gateway
  - Avaya S8300 Media Server with Avaya G700 Media Gateway
  - Avaya S8700 Media Server for IP Connect Configurations
  - Avaya S8700 Media Server for Multi-Connect Configurations
- Sun Java® Runtime Environment (JRE), Standard Edition Version 1.3.1\_02
- Apache Jakarta Tomcat or Allaire® JRun™ 3.0

\* **Note:** DEM provides Apache Jakarta Tomcat.

DEM supports INTUITY AUDIX messaging Release 5.1 or later systems that are connected to the company's LAN.

\* **Note:** To support the DEM Browser application, the PC accessing the DEM Browser must have Microsoft Internet Explorer 5.5 installed.

For the most up-to-date requirements for DEM, go to <http://www.avaya.com/support>.

## Upgrading from an Earlier Release

If you are upgrading from an earlier release of DEM, perform the following steps:

1. Gather the Intuity system information described in the “Before You Begin” section of this chapter.
2. Shut down all of the DataStore Managers running on DEM.
3. Shut down the Synchronization Engine running on DEM.
4. Shut down the DEM Administrator application.
5. Back up the DEM installation by copying the DEM folder to another directory.
6. Restart the PC.
7. Perform the procedures in [“Install the Software” on page 15](#).

## Before You Begin

Before installing the DEM software, make sure you have the following information:

- **LDAP information**
  - LDAP root
  - LDAP user ID (and its corresponding password) with administrative privileges
  - LDAP server port (usually 389)
  - name of the PC hosting the LDAP service
- **Voice server information**
  - an appropriate IP address of the network connection to the SAT server on the voice server
  - IP port number that is associated with the SAT server on that IP address

If you are using an Avaya S8100 Media Server with CMC1 Media Gateway (formerly called “DEFINITY One”) or an Avaya S8100 Media Server with Avaya G600 Media Gateway (formerly called “IP600”), perform the following steps:

- 1 Use the IP address of the server processor.
- 2 Verify that the port number is 23 for that IP address by entering the telnet command and the IP address from the SAT. For example, if the IP address is 123.45.67.89, you would enter **telnet 123.45.67.89**. If you receive a login prompt after entering the telnet command and the IP address, the IP address is correct.  
If you do not receive a login prompt after entering the telnet command and the IP address, contact your System Administrator for additional help.

If you are using an Avaya MultiVantage Solution system, use the IP address of a C-LAN board where the SAT server access is configured and the IP port that is configured on that board for the SAT server. To determine this information, perform the following steps:

- 1 From the SAT, use the command **display ip services** to determine the internal name of the C-LAN board that provides access to the SAT service and the IP port that is associated with it.

- 2 Now that you know the internal name of the C-LAN board, use the **display nodes ip** command to identify the IP address of the C-LAN board.
- login (and its corresponding password) on the voice server that DEM will use. This login must have the following settings:
    - login type set to “Service”
    - service level set to “inads”

It is recommended that you create this login before the DEM software is installed.

- **Intuity system information**

- IP address of the Intuity system
- login (and its corresponding password) on the Intuity system that DEM will use. This login must have administration privileges (for example, craft login).

It is recommended that you create this login before the DEM software is installed.

- **completed DEM planning form** (See [“Planning Form” on page 12.](#))

\* **Note:** If you are using Novell NDS eDirectory, you must enable “Cleartext” passwords.

# Planning Form

Before installing the software, you must know the following information. A blank copy of this form is located at the end of this chapter. You should fill out the planning form before installing the software.

## LDAP Information

1. LDAP Root: \_\_\_\_\_
2. LDAP User ID: \_\_\_\_\_
3. LDAP User ID password: \_\_\_\_\_
4. LDAP Server Port (usually 389): \_\_\_\_\_
5. Name of the PC hosting LDAP: \_\_\_\_\_

## Voice Server Information

1. Type of voice server
  - Avaya MultiVantage on a DEFINITY Server CSI
  - Avaya MultiVantage on a DEFINITY Server SI
  - Avaya MultiVantage on a DEFINITY Server R
  - Avaya S8100 Media Server with CMC1 Media Gateway
  - Avaya S8100 Media Server with Avaya G600 Media Gateway
  - Avaya S8300 Media Server with Avaya G700 Media Gateway
  - Avaya S8700 Media Server for IP Connect Configurations
  - Avaya S8700 Media Server for Multi-Connect Configurations
2. Switch ID of the voice server:  
\_\_\_\_\_
3. IP address of the voice server:  
\_\_\_\_\_
4. Port for the voice server:  
\_\_\_\_\_

5. Voice server login that DEM will use: \_\_\_\_\_

6. Voice server login password: \_\_\_\_\_

**Intuity  
Information**

1. Messaging server ID of the Intuity system:

\_\_\_\_\_

2. IP address of the Intuity system:

\_\_\_\_\_

3. Intuity login that DEM will use: \_\_\_\_\_

4. Intuity login password: \_\_\_\_\_

# Install the Software

To install DEM:

1. From the Avaya VisAbility Management Suite 1.0 CD, select **Avaya Directory Enabled Management**.

The Welcome dialog box appears.

2. Click the **Next** button.

The License Agreement dialog box appears.

3. Read the software license agreement.
4. To accept the software license agreement, click the **Yes** button.

The Customer Information dialog box appears.

5. In the **User Name** box, enter your name.
6. In the **Company Name** box, enter the company name.
7. Click the **Next** button.

The Choose Destination Location dialog box appears. The default folder is **C:\DEM**.

\* **Note:** If you are upgrading DEM, the Warning message box appears, indicating that a previous version of DEM is installed. Perform the following steps:

- a. Click the **OK** button.

The Previous Installation Detected dialog box appears. By default, the **UPGRADE previous installation** option button is selected.

- b. Click the **Next** button.

The Configure Intuity Servers dialog box appears. This dialog box enables you to specify each Intuity system that will be connected to DEM.

- c. Go to Step 29.

**8.** Click the **Next** button.

The Setup Type dialog box appears. You can select one of the following installation options.

— **Typical**

This option installs all of the DEM software. *This is the suggested installation option.*

— **Compact**

This option installs the minimum required components of the DEM software.

— **Custom**

This option enables you to specify which components of the DEM software you want to install.

**9.** Select the **Typical** option button, and click the **Next** button.

The LDAP Server Type dialog box appears.

**10.** Select the option button for the type of LDAP server you want to use, and click the **Next** button.

The LDAP Configuration dialog box appears.

**11.** Verify that the information displayed in the **Host** box and **Port** box is correct for your installed LDAP server.

The default values for Host and Port are based on the following assumptions:

- The LDAP server is running on the same PC as DEM.
- The LDAP server port is 389.

**12.** In the **Root** box, enter the LDAP root (for example, ***o=company.com***).

\* **Note:** If you are using Novell NDS, you must also enter the “context” in the **Root** box.

**13.** In the **User** box, enter an LDAP user who has administrative privileges (for example, ***cn=Admin***).

\* **Note:** If you are using Novell NDS, you must also enter that user's "context" in the User box (for example, **cn=Admin,o=dem**, where **o=dem** is the context).

If you are using Active Directory, you must enter the full user name (for example, **cn=Administrator,cn=users,dc=dem,dc=com**).

**14.** In the **Password** box, enter the password for the LDAP user you entered.

**15.** In the **Confirm Password** box, reenter the password for the LDAP user you entered.

**16.** Click the **Next** button.

The Configure DEFINITY Servers dialog box appears. This dialog box enables you to specify each voice server that will be connected to DEM.

**17.** Click the **Add** button.

The DEFINITY Configuration dialog box appears.

**18.** In the **DSM Name** box, enter the name of the voice server that will interface with DEM.

**19.** If the voice server is an Avaya S8100 Media Server with CMC1 Media Gateway (formerly called "DEFINITY One") or an Avaya S8100 Media Server with Avaya G600 Media Gateway (formerly called "IP600"), click the **DEFINITY ONE** check box. Otherwise, do not select this check box.

**20.** In the **Host IP** box, enter the IP address of the voice server.

**21.** In the **Port** box, enter the port of the voice server.

**22.** In the **Login** box, enter the voice server login that DEM will use. *This login must be a "service" type login with the service level set to "inads."*

**23.** In the **Password** box, enter the password for the voice server login.

**24.** In the **Confirm Password** box, reenter the password for the voice server login.

**25.** Perform one of the following steps:

— If you are using ASG Key, perform the following steps:

1 In the **ASG Key** box, enter the ASG Key password.

- 2 In the **Confirm ASG Key** box, reenter the ASG Key password.
  - 3 Proceed to Step 26.
- If you are not using ASG Key, go to Step 26.

**26.** Click the **OK** button.

The Configure DEFINITY Servers dialog box appears, showing the switch ID, host IP, and port you entered for the voice server.

**27.** Repeat Steps 17 to 26 for each additional voice server that will be connected to DEM.

**28.** When finished configuring the voice server(s) that will be connected to DEM, click the **Next** button.

The Configure Intuity Servers dialog box appears. This dialog box enables you to specify each Intuity system that will be connected to DEM.

**29.** Click the **Add** button.

The Intuity Configuration dialog box appears.

**30.** In the **DSM Name** box, enter the name of the Intuity system that will interface with DEM.

**31.** In the **Host** box, enter the IP address or machine name of the Intuity system.

**32.** In the **Login** box, enter the Intuity login that DEM will use. *This login must have administration privileges (for example, craft login).*

**33.** In the **Password** box, enter the password for the Intuity login.

**34.** In the **Confirm Password** box, reenter the password for the Intuity login.

**35.** Click the **OK** button.

The Configure Intuity Servers dialog box appears, showing the system ID and host IP you entered for the Intuity system.

**36.** Repeat Steps 29 to 35 for each additional Intuity system that will be connected to DEM.

**37.** When finished configuring the Intuity system(s) that will be connected to DEM, click the **Next** button.

The Begin Installation dialog box appears, displaying the installation information. If necessary, use the **Back** button to make any changes.

38. Click the **Next** button.

The DEM software is installed.

After the software is installed, the Avaya Directory Enabled Management Applications Setup dialog box appears. Using this dialog box, you will specify whether you want to use Apache Jakarta Tomcat or Allaire JRun as the servlet engine for the DEM Browser. (Apache Jakarta Tomcat is provided with the DEM software.) By default, the **Apache Jakarta Tomcat** option button is selected.

39. Select the appropriate option button, and then click the **Next** button.

The DEM Browser software is installed.

When the installation is complete, the Installation Complete dialog box appears.

40. Click the **Finish** button.

After you have finished installing the Avaya VisAbility Management Suite, go to [“Configuring Avaya Directory Enabled Management \(DEM\)” on page 23](#) to configure DEM initially.

# Planning Form

Before installing the software, enter the following information:

## LDAP Information

1. LDAP Root: \_\_\_\_\_
2. LDAP User ID: \_\_\_\_\_
3. LDAP User ID password: \_\_\_\_\_
4. LDAP Server Port (usually 389): \_\_\_\_\_
5. Name of the PC hosting LDAP: \_\_\_\_\_

## Voice Server Information

1. Type of voice server
  - Avaya MultiVantage on a DEFINITY Server CSI
  - Avaya MultiVantage on a DEFINITY Server SI
  - Avaya MultiVantage on a DEFINITY Server R
  - Avaya S8100 Media Server with CMC1 Media Gateway
  - Avaya S8100 Media Server with Avaya G600 Media Gateway
  - Avaya S8300 Media Server with Avaya G700 Media Gateway
  - Avaya S8700 Media Server for IP Connect Configurations
  - Avaya S8700 Media Server for Multi-Connect Configurations
2. Switch ID of the voice server:  
\_\_\_\_\_
3. IP address of the voice server:  
\_\_\_\_\_
4. Port for the voice server:  
\_\_\_\_\_
5. Voice server login that DEM will use:  
\_\_\_\_\_
6. Voice server login password: \_\_\_\_\_

**Intuity  
Information**

1. Messaging server ID of the Intuity system:

\_\_\_\_\_

2. IP address of the Intuity system:

\_\_\_\_\_

3. Intuity login that DEM will use: \_\_\_\_\_

4. Intuity login password: \_\_\_\_\_



# 3 Configuring Avaya Directory Enabled Management (DEM)

---

This chapter describes how to configure DEM. The steps you must perform to configure DEM depend on whether you installed a new DEM system or upgraded from an earlier release of DEM.

## Configuring a New DEM

To configure a new DEM installation, you must perform the following procedures:

1. Configure the LDAP schema ([“Procedure 1: Configure the LDAP Schema” on page 28](#)). Depending on the type of LDAP you want to use, you must perform one of the following steps:
  - If you want to configure DEM for Active Directory, go to [“Configure the LDAP Schema for Active Directory” on page 28](#). Perform this procedure only if you want to use Active Directory LDAP instead of general LDAP (that is, Netscape or NDS).
  - If you want to use general LDAP (that is, Netscape or NDS, go to [“Configure the LDAP Schema for Netscape or NDS” on page 31](#)).
2. Start the DEM Administrator application, and log in as Administrator ([“Procedure 2: Start the DEM Administrator Application” on page 32](#)).
3. Configure GWAgent ([“Procedure 3: Configure GWAgent” on page 32](#)).
4. Activate the Synchronization Engine ([“Procedure 4: Activate the Synchronization Engine” on page 35](#)).
5. Activate and attach the DEM DataStore Manager ([“Procedure 5: Activate and Attach the DEM DataStore Manager” on page 36](#)).

**6.** Configure additional DEM DataStore Managers  
([“Procedure 6: Configure Additional DEM DataStore Managers” on page 37](#)).

\* **Note:** Perform this procedure only if the customer has requested an additional DEM DataStore Manager.

**7.** Activate and attach the DEFINITY DataStore Manager  
([“Procedure 7: Activate and Attach the DEFINITY DataStore Manager” on page 40](#)).

**8.** Configure additional DEFINITY DataStore Managers  
([“Procedure 8: Configure Additional DEFINITY DataStore Managers” on page 41](#)).

\* **Note:** Perform this procedure only if you did not configure additional voice servers during the software installation, or you want to add additional voice servers after DEM is installed.

**9.** Activate and attach the Intuity DataStore Manager  
([“Procedure 9: Activate and Attach the Intuity DataStore Manager” on page 44](#)).

**10.** Configure additional Intuity DataStore Managers  
([“Procedure 10: Configure Additional Intuity DataStore Managers” on page 45](#)).

\* **Note:** Perform this procedure only if you did not configure additional Intuity systems during the software installation, or you want to add additional Intuity systems after DEM is installed.

**11.** Configure the DEM Browser ([“Procedure 11: Configure the DEM Browser” on page 48](#)).

**12.** Create a new DEM Administrator login, and delete the default login ([“Procedure 12: Create a New DEM Administrator Login” on page 49](#)).

**13.** Administer DEM ([“Procedure 13: Administer DEM” on page 50](#)).

---

## Upgrading from an Earlier Release

If you upgraded from an earlier release of DEM, the procedures you must perform depend on whether you want to use Active Directory.

If you want to use Active Directory, perform the following procedures:

1. Configure the LDAP schema for Active Directory (“[Configure the LDAP Schema for Active Directory](#)” on page 28).
  2. Start the DEM Administrator application, and log in as Administrator (“[Procedure 2: Start the DEM Administrator Application](#)” on page 32).
  3. Configure GWAgent (“[Procedure 3: Configure GWAgent](#)” on page 32).
  4. Activate the Synchronization Engine (“[Procedure 4: Activate the Synchronization Engine](#)” on page 35).
  5. Activate and attach the DEM DataStore Manager (“[Procedure 5: Activate and Attach the DEM DataStore Manager](#)” on page 36).
  6. Configure additional DEM DataStore Managers (“[Procedure 6: Configure Additional DEM DataStore Managers](#)” on page 37).
- \* **Note:** Perform this procedure only if the customer has requested an additional DEM DataStore Manager.
7. Activate and attach the DEFINITY DataStore Manager (“[Procedure 7: Activate and Attach the DEFINITY DataStore Manager](#)” on page 40).
  8. Configure additional DEFINITY DataStore Managers (“[Procedure 8: Configure Additional DEFINITY DataStore Managers](#)” on page 41).
- \* **Note:** Perform this procedure only if you did not configure additional voice servers during the software installation, or you want to add additional servers after DEM is installed.
9. Activate and attach the Intuity DataStore Manager (“[Procedure 9: Activate and Attach the Intuity DataStore Manager](#)” on page 44).

10. Configure additional Intuity DataStore Managers ([“Procedure 10: Configure Additional Intuity DataStore Managers”](#) on page 45).

\* **Note:** Perform this procedure only if you did not configure additional Intuity systems during the software installation, or you want to add additional Intuity systems after DEM is installed.

11. Configure the DEM Browser ([“Procedure 11: Configure the DEM Browser”](#) on page 48).

12. Create a new DEM Administrator login, and delete the default login ([“Procedure 12: Create a New DEM Administrator Login”](#) on page 49).

13. Administer DEM ([“Procedure 13: Administer DEM”](#) on page 50).

If you want to continue using general LDAP (that is, Netscape or NDS), perform the following procedures:

1. Start the DEM Administrator application, and log in as Administrator ([“Procedure 2: Start the DEM Administrator Application”](#) on page 32).
2. Activate the Synchronization Engine ([“Procedure 4: Activate the Synchronization Engine”](#) on page 35).
3. Activate and attach the DEM DataStore Manager ([“Procedure 5: Activate and Attach the DEM DataStore Manager”](#) on page 36).
4. Configure additional DEM DataStore Managers ([“Procedure 6: Configure Additional DEM DataStore Managers”](#) on page 37).

\* **Note:** Perform this procedure only if the customer has requested an additional DEM DataStore Manager.

5. Activate and attach the DEFINITY DataStore Manager ([“Procedure 7: Activate and Attach the DEFINITY DataStore Manager”](#) on page 40).

6. Configure additional DEFINITY DataStore Managers ([“Procedure 8: Configure Additional DEFINITY DataStore Managers”](#) on page 41).

\* **Note:** Perform this procedure only if you did not configure additional voice servers during the software installation, or you want to add additional voice servers after DEM is installed.

7. Activate and attach the Intuity DataStore Manager (“[Procedure 9: Activate and Attach the Intuity DataStore Manager](#)” on page 44).
  8. Configure additional Intuity DataStore Managers (“[Procedure 10: Configure Additional Intuity DataStore Managers](#)” on page 45).
- \* **Note:** Perform this procedure only if you did not configure additional Intuity systems during the software installation, or you want to add additional Intuity systems after DEM is installed.
9. Configure the DEM Browser (“[Procedure 11: Configure the DEM Browser](#)” on page 48).

## Procedure 1: Configure the LDAP Schema

In this section, you will apply schema updates to the LDAP server so that DEM data will populate the LDAP server.

Depending on the type of LDAP you want to use, perform one of the following steps:

- If you want to configure DEM for Active Directory, go to [“Configure the LDAP Schema for Active Directory” on page 28](#).
- \* **Note:** Perform this procedure only if you want to use Active Directory LDAP instead of Netscape or NDS LDAP.
- If you want to use Netscape LDAP or NDS LDAP, go to [“Configure the LDAP Schema for Netscape or NDS” on page 31](#).

### Configure the LDAP Schema for Active Directory

In this section, you will apply schema updates to the Active Directory LDAP server so that DEM data will populate the Active Directory LDAP server.

To configure DEM for Active Directory:

1. From the Start menu, select **Programs>Command Prompt**.  
  
The Command Prompt window appears.
2. Type ***cd \DEM\ldap\Active Directory*** (where ***DEM*** is the DEM installation directory) and press ENTER.
3. Type ***ADlu LDAPserverpassword adaadd.ldif*** (where ***LDAPserverpassword*** is the password for the LDAP server) and press ENTER.
4. Type ***ADlu adcadd.ldif*** and press ENTER.
5. Close the Command Prompt window.
6. From the Start menu, select **Programs>Windows 2000 Support Tools>Tools>ADSI Edit**.  
  
The ADSI Edit window appears.
7. Expand **Schema**.

8. Click on the file folder under Schema.

The schema settings appear.

9. Right-click the mouse on **CN=GWUserRoot**.

A submenu appears.

10. Select **Properties**.

The Properties dialog box appears.

11. From the **Select a property view** box, select **auxiliary class**.

12. In the **Edit Attribute** box, type *GwUserIntuity* and click the **Add** button.

13. In the **Edit Attribute** box, type *GwUserDEFINITY* and click the **Add** button.

14. Click the **OK** button.

15. Log into the network.

16. From the Start menu, select **Programs>Avaya>Directory Enabled Management>DEM Admin**.

The Avaya Directory Enabled Management Administrator Login dialog box appears.

17. In the **Username** box, enter *Administrator*.

18. In the **Password** box, enter *password*.

19. Click the **OK** button.

The Avaya Directory Enabled Management Administrator window appears. The **Synchronization Engines** tab is displayed.

20. Click the **Device Configurations** button on the toolbar.

The Configuration Editor dialog box appears.

21. Perform one of the following steps:

— If you want to create a new Active Directory DataStore Manager:

- 1 In the **Device Class** area, click the **DataStore Manager** option button.
- 2 Click the **Add** button.  
The New Configuration dialog box appears.
- 3 Enter a name for the new DataStore Manager.
- 4 Click the **OK** button.

- 5 Click the **Import** button.  
The Open dialog box appears.
- 6 Select **\_ActiveDirLDAP.ini** and click the **Open** button.
- 7 In the [\_Root\_] section, set DSMID= to the name you will assign to the new Active Directory DSM you will create.
- 8 Go to the [Connection] section and specify the appropriate information for the following attributes:  
Base=  
Password=  
Port=  
Server=  
User=
- 9 Click the **Save** button.
- 10 Click the **Done** button.
- 11 Go to Step 22.

— If you want to modify the existing DEM LDAP DataStore Manager to use Active Directory:

- 1 In the **Device Class** area, click the **DataStore Manager** option button.
- 2 In the **Defined Configuration** box, select **PrimaryLDAP**.
- 3 Click the **Import** button.  
The Open dialog box appears.
- 4 Select **\_ActiveDirLDAP.ini** and click the **Open** button.
- 5 In the [\_Root\_] section, set **DSMID=GWDSM**.
- 6 Go to the [Connection] section and specify the appropriate information for the following attributes:  
Base=  
Password=  
Port=  
Server=  
User=
- 7 Click the **Save** button.
- 8 Click the **Done** button.
- 9 Go to Step 22.

**22.** Click the **DataStore Managers** tab.

**23.** Click the **DefineDSM** button.

The DSM Definition dialog box appears.

**24.** In the **DSM Name** box, enter the name you specified for the DataStore Manager (for example, **GWDSM**).

**25.** From the **Configuration ID** box, select the name you specified for the DSM ID (for example, **PrimaryLDAP**).

26. Click the **OK** button.
27. Go to [“Procedure 3: Configure GWAgent” on page 32.](#)

## Configure the LDAP Schema for Netscape or NDS

In this section, you will apply schema updates to the Netscape or NDS LDAP server so that DEM data will populate the LDAP server.

To update the Netscape Servers LDAP schema:

1. Copy the schema files “slapd.user\_at.conf” and “slapd.user\_oc.conf” from the directory `\DEM\ldap\Netscape` to the directory `\Netscape\Server4\slapd-server name\config` (where *server name* is the name of the computer hosting LDAP directory).

The file “slapd.user\_at.conf” contains the EDG attributes for Netscape. The file “slapd.user\_oc.conf” contains the object classes.

2. From the Start menu, access the Services window.  
The Services window appears.
3. Stop and restart Netscape Directory Server.
4. Go to [“Procedure 2: Start the DEM Administrator Application” on page 32.](#)

To update the Novell NDS Servers LDAP schema:

1. From the Start menu, select **Programs>Command Prompt**.  
The Command Prompt window appears.
2. Type `cd \DEM\ldap\Nds` (where *DEM* is the DEM installation directory) and press ENTER.
3. Type `ndslu LDAPserverpassword ndsattr.ldif` (where *LDAPserverpassword* is the password for the LDAP server) and press ENTER.
4. Type `ndslu ndsclass.ldif` and press ENTER.
5. Close the Command Prompt window.
6. From the Start menu, access the Services window.  
The Service window appears.
7. Stop and restart Novell Directory Servers.
8. Go to [“Procedure 2: Start the DEM Administrator Application” on page 32.](#)

## Procedure 2: Start the DEM Administrator Application

To start the DEM Administrator application:

1. Log into the network.
2. From the Start menu, select **Programs>Avaya>Directory Enabled Management>DEM Admin**.

The Avaya Directory Enabled Management Administrator Login dialog box appears.

3. In the **Username** box, enter *Administrator*.
4. In the **Password** box, enter *password*.
5. Click the **OK** button.

The Avaya Directory Enabled Management Administrator window appears. The **Synchronization Engines** tab is displayed.

Go to [“Procedure 3: Configure GWAgent”](#) on page 32.

## Procedure 3: Configure GWAgent

In this procedure, you will configure GWAgent. GWAgent monitors the LDAP datastore and notifies DEM when changes are made.

To configure GWAgent:

1. Click the **GWAgent** tab in the Avaya Directory Enabled Management Administrator window.

The **GWAgent** tab appears.

2. Click the **Startup** button.

The GWAgent StartUp Parameters dialog box appears.

3. Click the **Browse** button.

The Browse for Folder dialog box appears.

4. Select the folder where GWAgent is located. The default location is **c:\DEM\bin**.

5. Click the **OK** button.

The GWAgent settings are displayed in the GWAgent StartUp Parameters dialog box.

6. Verify that the information displayed in the **Host** box and the **Port** box is correct.
7. Click the **OK** button.
8. Click the **Connect** button.

The Connect to GWAgent dialog box appears.

9. In the **Server** box, enter the LDAP server.
10. In the **User** box, enter an LDAP user who has administrative privileges.
11. In the **Password** box, enter the password for the LDAP user you entered.
12. Click the **Save these settings as default** check box.

A check mark appears in the check box.

13. Click the **OK** button.

You are connected to the DEM Agent.

14. Click the **Populate** button.

The General Settings dialog box appears.

15. Click the **Add** button.

The Add New Trigger dialog box appears.

16. Enter *ou=Gateway Users,o=LDAP root*, where **LDAP root** is the root you specified in Step 12 of the software installation. See [“Install the Software” on page 15](#).
17. Make sure the **Active** option button is selected. (It is selected by default.)
18. Click the **OK** button.

Information is displayed.
19. Click the **Add** button.

The Add New Trigger dialog box appears.

**20.** Enter *ou=DEFINITY Servers,o=LDAP root*, where *LDAP root* is the root you specified in Step 12 of the software installation. See [“Install the Software” on page 15](#).

**21.** Click the **OK** button.

Information is displayed.

**22.** Click the **Add** button.

The Add New Trigger dialog box appears.

**23.** Enter *ou=Messaging Servers,o=LDAP root*, where *LDAP root* is the root you specified in Step 12 of the software installation. See [“Install the Software” on page 15](#).

**24.** Click the **OK** button.

Information is displayed.

**25.** Select the **Save these settings as default** check box.

A check mark appears in the check box.

**26.** Click the **OK** button to close the General Settings dialog box.

**27.** Click the **Commit** button.

Go to [“Procedure 4: Activate the Synchronization Engine” on page 35](#).

## Procedure 4: Activate the Synchronization Engine

In this section, you will activate the default Synchronization Engine “GWSE.” During the software installation, GWSE was installed. GWSE has already been defined and registered in the DEM Administrator application.

To activate the Synchronization Engine:

1. Click the **Synchronization Engines** tab (if it is not already selected).

The Synchronization Engine GWSE appears in the **Synchronization Engines** list box. Its status is **Offline**.

2. Select **GWSE**.
3. Click the **Activate** button.

A green light appears next to GWSE, and the status changes to **Active**.

Go to [“Procedure 5: Activate and Attach the DEM DataStore Manager”](#) on page 36.

## Procedure 5: Activate and Attach the DEM DataStore Manager

In this section, you will activate and “attach” the DataStore Manager for the DEM (GWDSM). GWDSM connects DEM to its internal LDAP datastore, which will contain all of the DEM data. (GWDSM was created, defined, and registered during the software installation.)

After GWDSM is “attached,” the DEM LDAP datastore will be able to receive data from the DEM via GWDSM. However, before GWDSM can be attached, it must be activated.

To activate and attach the GWDSM:

1. Click the **DataStore Managers** tab.

The **DataStore Managers** tab appears.

The GWDSM DataStore Manager appears in the **DataStore Managers** list box. Its status is **Offline**.

2. Select **GWDSM**.

3. Click the **Activate** button.

A yellow light appears next to the DataStore Manager, and the status changes to **Detached**.

4. Click the **Attach** button.

The status changes to **Ready**. GWDSM can now pass DEM data from the Synchronization Engine to the LDAP datastore.

If the customer wants additional DEM DataStore Managers, go to [“Procedure 6: Configure Additional DEM DataStore Managers” on page 37](#).

Otherwise, go to [“Procedure 7: Activate and Attach the DEFINITY DataStore Manager” on page 40](#).

---

## Procedure 6: Configure Additional DEM DataStore Managers

\* **Note:** Perform this procedure if the customer has requested additional DEM DataStore Managers.

The software installation created, defined, and registered a DataStore Manager for DEM. If you want to attach additional DEM DataStore Managers to DEM, you must create, define, register, activate, and attach a DataStore Manager.

To create, define, register, activate, and attach additional DEM DataStore Managers:

1. Click the **Device Configurations** button on the toolbar.

The Configuration Editor dialog box appears.

2. In the **Device Class** area, click the **DataStore Manager** option button.

3. Click the **Add** button.

A dialog box appears, prompting you to enter the name of the configuration file.

4. Enter a name that can be easily associated with the DEM DataStore Manager you are configuring, and click the **OK** button.

The name you entered for the new configuration file is displayed and selected in the **Defined Configurations** list box.

5. In the **Defined Configurations** list box, select the DEM DataStore Manager that was created during the software installation (\_PrimaryLDAP).

The information for the selected file appears in the **Configuration Details** box.

6. Select all of the information in the **Configuration Details** box, and copy it to the Windows Clipboard.

7. In the **Defined Configurations** list box, select the DEM DataStore Manager configuration you added in Step 4 of this procedure.

The **Configuration Details** box is empty.

8. Click the mouse inside the **Configuration Details** box, and paste the information from the Windows Clipboard.

9. Make the following changes to the information in this file:
  - a. In the [**connection**] section, enter the LDAP base (**o=**).
  - b. In the [**connection**] section, enter the port (**port=**) for the LDAP server you want to use.
  - c. In the [**connection**] section, enter the IP address (**Server=**) for the LDAP server you want to use.
  - d. In the [**connection**] section, enter an LDAP user (**cn=**) who has administrative privileges for the LDAP server you want to use.
  - e. In the [**connection**] section, type **password=%@LDAP\_PW%**.
  - f. In the [**variables**] section, type **@LDAP\_PW=my\_password**, where **my\_password** is the password for the LDAP server you want to use.

10. Click the **Done** button.

The changes are saved for the new DataStore Manager configuration.

11. Click the **DataStore Managers** tab.

The **DataStore Managers** tab appears.

12. Click the **Define DSM** button.

The DSM Definition dialog box appears.

13. In the **DSM Name** box, enter the name for this DataStore Manager.

14. In the **DSM Type** box, enter **GWDSM**.

15. From the **Configuration ID** drop-down list box, select the DEM DataStore Manager configuration you created in Step 4 of this procedure.

16. In the **Comment** box, you may enter notes about this DataStore Manager. The information you enter in this box is for your convenience only. DEM does not use this information.

17. Make sure the **Register with IMR** check box is enabled. (It is enabled by default.)

**18.** Click the **OK** button.

The new DataStore Manager appears in the DataStore Managers list box. Its status is **Offline**.

The new DataStore Manager is registered with DEM.

**19.** On the **DataStore Managers** tab, select the new DEM DataStore Manager you created.

**20.** Click the **Activate** button.

A yellow light appears next to the DataStore Manager, and the status changes to **Detached**.

**21.** Click the **Attach** button.

The status changes to **Ready**. The DEM DataStore Manager you created can now pass DEM data from the Synchronization Engine to the LDAP server.

Repeat Steps 1 through 21 for each DEM DataStore Manager you want to configure. When finished, go to [“Procedure 7: Activate and Attach the DEFINITY DataStore Manager”](#) on page 40.

## Procedure 7: Activate and Attach the DEFINITY DataStore Manager

In this section, you will activate and “attach” the DataStore Manager for each voice server. The DEFINITY DataStore Manager connects the voice server to DEM. (The DEFINITY DataStore Manager was created, defined, and registered during the software installation.)

After the DEFINITY DataStore Manager is “attached,” the voice server will be able to receive data from DEM via the DEFINITY DataStore Manager. However, before the DEFINITY DataStore Manager can be attached, it must be activated.

To activate and attach the DEFINITY DataStore Manager:

1. On the **DataStore Managers** tab, select the DEFINITY DataStore Manager. The DEFINITY DataStore Manager is named for the voice server that will interface with DEM. (See Step 18 in Chapter 2.)

2. Click the **Activate** button.

A yellow light appears next to the DataStore Manager, and the status changes to **Detached**.

3. Click the **Attach** button.

The status changes to **Ready**. The selected DEFINITY DataStore Manager can now pass DEM data from the Synchronization Engine to the voice server.

4. Repeat Steps 1 to 4 for each DEFINITY DataStore Manager (that is, if there is more than one voice server connected to DEM).

If additional voice servers will be connected to DEM and you did not configure these systems during the software installation or you want to add additional voice servers after DEM is installed, go to [“Procedure 8: Configure Additional DEFINITY DataStore Managers” on page 41](#).

Otherwise, perform one of the following steps:

- If you are using an Intuity system, go to [“Procedure 9: Activate and Attach the Intuity DataStore Manager” on page 44](#).
- If you are not using an Intuity system, go to [“Procedure 11: Configure the DEM Browser” on page 48](#).

---

## Procedure 8: Configure Additional DEFINITY DataStore Managers

\* **Note:** Perform this procedure if additional voice servers will be connected to DEM and you did not configure these systems during the software installation or you want to add additional voice servers after DEM is installed.

The software installation created, defined, and registered a DataStore Manager for each voice server you specified. If you want to attach additional voice servers to DEM, you must create, define, register, activate, and attach a DataStore Manager for each voice server.

To create, define, register, activate, and attach a DataStore Manager for each additional voice server:

1. Click the **Device Configurations** button on the toolbar.

The Configuration Editor dialog box appears.

2. In the **Device Class** area, click the **DataStore Manager** option button.

3. Click the **Add** button.

A dialog box appears, prompting you to enter the name of the configuration file.

4. Enter a name that can be easily associated with the specific voice server you are configuring, and click the **OK** button.

The name you entered for the new configuration file is displayed and selected in the **Defined Configurations** list box.

5. In the **Defined Configurations** list box, select the DEFINITY DataStore Manager that was created during the software installation.

The information for the selected file appears in the **Configuration Details** box. The DEFINITY DataStore Manager contains the common information that all DEFINITY DataStore Managers share.

6. Select all of the information in the **Configuration Details** box, and copy it to the Windows Clipboard.

7. In the **Defined Configurations** list box, select the DEFINITY DataStore Manager configuration you added in Step 4 of this procedure.

The **Configuration Details** box is empty.

8. Click the mouse inside the **Configuration Details** box, and paste the information from the Windows Clipboard.
9. Make the following changes to the information in this file:
  - a. In the [**connection**] section, enter the login (**login=**) for the voice server you want to use.
  - b. In the [**connection**] section, enter the C-LAN port (**port=**) for the voice server you want to use.
  - c. In the [**connection**] section, enter the IP address (**Server=**) for the voice server you want to use.
  - d. In the [**connection**] section, type **password=%@DEFTY\_PW%**.
  - e. If you are using ASG Key, type **yek=%@ASG\_KEY%** at the bottom of the [**connection**] section.
  - f. In the [**variables**] section, enter the switch name (**dsid=**) for the voice server you want to use to identify this voice server in LDAP.
  - g. At the bottom of the [**variables**] section, type **@DEFTY\_PW=my\_password**, where **my\_password** is the password for the voice server you want to use.
  - h. If you are using ASG Key, type **@ASG\_KEY=key\_password** at the bottom of the [**variables**] section, where **key\_password** is the password for the ASG Key.
10. Perform one of the following steps:
  - If you are creating a DataStore Manager for an Avaya S8100 Media Server with CMC1 Media Gateway (formerly called “DEFINITY One”), change each occurrence of **G3** (if present) to **CONTRY** in the [**variables**] section.
  - If you are creating a DataStore Manager for a voice server other than an Avaya S8100 Media Server with CMC1 Media Gateway, change each occurrence of **CONTRY** (if present) to **G3** in the [**variables**] section.
11. Click the **Save** button.
12. Click the **Done** button.

The changes are saved for the new DataStore Manager configuration.
13. Click the **DataStore Managers** tab.

The **DataStore Managers** tab appears.

**14.** Click the **Define DSM** button.

The DSM Definition dialog box appears.

**15.** In the **DSM Name** box, enter the name (that is, switch ID) of the voice server that will use this DataStore Manager.

**16.** In the **DSM Type** box, enter **DEFINITY**.

**17.** From the **Configuration ID** drop-down list box, select the DEFINITY DataStore Manager configuration you created in Step 4 of this procedure.

**18.** In the **Comment** box, you may enter notes about this DataStore Manager. The information you enter in this box is for your convenience only. DEM does not use this information.

**19.** Make sure the **Register with IMR** check box is enabled. (It is enabled by default.)

**20.** Click the **OK** button.

The new DataStore Manager appears in the **DataStore Managers** list box. Its status is **Offline**.

The new DataStore Manager is registered with DEM.

**21.** On the **DataStore Managers** tab, select the new DEFINITY DataStore Manager you created.

**22.** Click the **Activate** button.

A yellow light appears next to the DataStore Manager, and the status changes to **Detached**.

**23.** Click the **Attach** button.

The status changes to **Ready**. The DEFINITY DataStore Manager you created can now pass DEM data from the Synchronization Engine to the voice server.

Repeat Steps 1 through 23 for each voice server you want to configure.

When finished, perform one of the following steps:

- If you are using an Intuity system, go to [“Procedure 9: Activate and Attach the Intuity DataStore Manager” on page 44](#).
- If you are not using an Intuity system, go to [“Procedure 11: Configure the DEM Browser” on page 48](#).

## Procedure 9: Activate and Attach the Intuity DataStore Manager

In this section, you will activate and “attach” the DataStore Manager for each Intuity system. The Intuity DataStore Manager connects the Intuity system to DEM. (The Intuity DataStore Manager was created, defined, and registered during the software installation.)

After the Intuity DataStore Manager is “attached,” the Intuity system will be able to receive data from DEM via the Intuity DataStore Manager. However, before the Intuity DataStore Manager can be attached, it must be activated.

To activate and attach the Intuity DataStore Manager:

1. On the **DataStore Managers** tab, select the Intuity DataStore Manager. The Intuity DataStore Manager is named for the Intuity system that will interface with DEM. (See Step 30 in Chapter 2.)

2. Click the **Activate** button.

A yellow light appears next to the DataStore Manager, and the status changes to **Detached**.

3. Click the **Attach** button.

The status changes to **Ready**. The selected Intuity DataStore Manager can now pass DEM data from the Synchronization Engine to the Intuity system.

4. Repeat Steps 1 to 3 for each Intuity DataStore Manager (that is, if there is more than one Intuity system connected to DEM).

If additional Intuity systems will be connected to DEM and you did not configure these systems during the software installation or you want to add additional Intuity systems after DEM is installed, go to [“Procedure 10: Configure Additional Intuity DataStore Managers” on page 45](#).

Otherwise, go to [“Procedure 11: Configure the DEM Browser” on page 48](#).

---

## Procedure 10: Configure Additional Intuity DataStore Managers

\* **Note:** Perform this procedure if additional Intuity systems will be connected to DEM and you did not configure these systems during the software installation or you want to add additional Intuity systems after DEM is installed.

The software installation created, defined, and registered a DataStore Manager for each Intuity system you specified. If you want to attach additional Intuity systems to DEM, you must create, define, register, activate, and attach a DataStore Manager for each Intuity system.

To create, define, register, activate, and attach a DataStore Manager for each additional Intuity system:

1. Click the **Device Configurations** button on the toolbar.

The Configuration Editor dialog box appears.

2. In the **Device Class** area, click the **DataStore Manager** option button.

3. Click the **Add** button.

A dialog box appears, prompting you to enter the name of the configuration file.

4. Enter a name that can be easily associated with the specific Intuity system you are configuring, and click the **OK** button.

The name you entered for the new configuration file is displayed and selected in the **Defined Configurations** list box.

5. In the **Defined Configurations** list box, select the Intuity DataStore Manager that was created during the software installation.

The information for the selected file appears in the **Configuration Details** box. The Intuity DataStore Manager contains the common information that all Intuity DataStore Managers share.

6. Select all of the information in the **Configuration Details** box, and copy it to the Windows Clipboard.

7. In the **Defined Configurations** list box, select the Intuity DataStore Manager configuration you added in Step 4 of this procedure.

The **Configuration Details** box is empty.

8. Click the mouse inside the **Configuration Details** box, and paste the information from the Windows Clipboard.
9. Make the following changes to the information in this file:
  - a. In the [**connection**] section, enter the login (**login=**) for the Intuity system you want to use.
  - b. In the [**connection**] section, enter the IP address (**Server=**) for the Intuity system you want to use.
  - c. In the [**connection**] section, type **password=%@INTUITY\_PW%**.
  - d. If you are using the IMAPI password, type **IMAPIpassword=%@IMAPIpassword%** at the bottom of the [**connection**] section.
  - e. In the [**variables**] section, enter the messaging server name (**dsid=**) for the Intuity system you want to use to identify this Intuity system in LDAP.
  - f. At the bottom of the [**variables**] section, type **@INTUITY\_PW=my\_password**, where **my\_password** is the password for the Intuity system you want to use.
  - g. If you are using the IMAPI password, type **@IMAPIpassword=my\_password** at the bottom of the [**variables**] section, where **my\_password** is the IMAPI password for the Intuity system.
10. Click the **Save** button.
11. Click the **Done** button.

The changes are saved for the new DataStore Manager configuration.

12. Click the **DataStore Managers** tab.

The **DataStore Managers** tab appears.

13. Click the **Define DSM** button.

The DSM Definition dialog box appears.

14. In the **DSM Name** box, enter the name (that is, messaging server ID) of the Intuity system that will use this DataStore Manager.

15. In the **DSM Type** box, enter **Intuity**.

16. From the **Configuration ID** drop-down list box, select the Intuity DataStore Manager configuration you created in Step 4 of this procedure.
17. In the **Comment** box, you may enter notes about this DataStore Manager. The information you enter in this box is for your convenience only. DEM does not use this information.
18. Make sure the **Register with IMR** check box is enabled. (It is enabled by default.)
19. Click the **OK** button.

The new DataStore Manager appears in the **DataStore Managers** list box. Its status is **Offline**.

The new DataStore Manager is registered with DEM.

20. On the **DataStore Managers** tab, select the new Intuity DataStore Manager you created.
21. Click the **Activate** button.

A yellow light appears next to the DataStore Manager, and the status changes to **Detached**.
22. Click the **Attach** button.

The status changes to **Ready**. The Intuity DataStore Manager you created can now pass DEM data from the Synchronization Engine to the Intuity system.

Repeat Steps 1 through 22 for each Intuity system you want to configure.

When finished, go to [“Procedure 11: Configure the DEM Browser” on page 48](#).

## Procedure 11: Configure the DEM Browser

This section describes how to set the DEM Browser to use Microsoft IIS as its web server for Allaire JRun.

\* **Note:** If you are using Jakarta Tomcat, ignore this procedure and go to [“Procedure 12: Create a New DEM Administrator Login”](#) on page 49.

Perform this procedure only if you are using Allaire JRun.

To configure the DEM Browser with Allaire JRun:

1. From Start menu, select, **Programs>JRun 3.0>JRun Management Console**.

The user login window appears.

2. Enter your login information and click the **Login** button.

The JRun Management Console window appears.

3. Click **connector wizard** at the top of the window.

The Step 1 of Connector Wizard page appears.

4. In the **JRun Server Name** box, select **JRun Default Server**.

5. From the **Web Server Type** box, select **Internet Information Server**.

6. From the **Web Server Version** box, select **5.0**.

7. Click the **Next** button.

A message box appears.

8. Click the **OK** button.

The Step 2 of Connector Wizard page appears.

9. In the **JRun Server Connector Port** box, enter **14226**.

10. Click the **Next** button.

The Step 3 of Connector Wizard page appears.

11. Click the **Browse** button.

The Directory Reader window appears.

**12.** Locate and select the **Inetpub\scripts** directory.

**13.** Click the **Next** button.

The Step 4 of Connector Wizard page appears.

**14.** Click the **Done** button.

**15.** From the Start menu, access the Services window.

The Service window appears.

**16.** Restart the JRun Default Server service.

Go to [“Procedure 12: Create a New DEM Administrator Login” on page 49.](#)

## Procedure 12: Create a New DEM Administrator Login

In this section, you will create a new DEM Administrator login and delete the default login. This new DEM Administrator login will be used by the DEM Administrator.

To create a new DEM Administrator login and delete the default login:

**1.** Click the **User Profiles** button on the toolbar.

The User Profiles dialog box appears.

**2.** Click the **Add** button.

The Add User dialog box appears.

**3.** In the **Username** box, enter the new login.

**4.** In the **Password** box, enter the password.

**5.** Click the **Superuser** check box.

The **Superuser** check box must be enabled.

**6.** Click the **OK** button.

The new login appears in the **Users** box.

**7.** In the **Users** box, select **Administrator**.

The settings for the selected account appear in the **Security Profile** box.

8. Click the **Delete** button.

The Confirm dialog box appears.

9. Click the **Yes** button.

The selected account is removed from the **Users** box.

10. Click the **OK** button to close the User Profiles dialog box.

Go to [“Procedure 13: Administer DEM”](#) on page 50.

## Procedure 13: Administer DEM

After you have completed Procedures 1 through 12, the Synchronization Engine, the DEFINITY DataStore Manager(s) and Intuity DataStore Manager(s) are in the ready state, and the LDAP Data Store is configured. You are ready to start running the Synchronization Engine, the DEFINITY DataStore Manager(s), and Intuity DataStore Manager(s), and to administer DEM. Refer to *Avaya™ Directory Enabled Management Administration*, which is a PDF that is located in the Docs folder in the DEM installation directory. This document describes how to manage DEM using the DEM Administrator application.

# 4 Troubleshooting

---

This chapter provides information that can assist you in solving problems you might encounter when you install and configure DEM initially. This chapter is divided into the following sections:

- Troubleshooting Installation
- Troubleshooting DEM Administrator Startup
- Troubleshooting DEM Administrator Login
- Troubleshooting the Synchronization Engine
- Troubleshooting DataStore Managers
- Troubleshooting GWAgent
- Troubleshooting the Scheduler

Refer to the appropriate section to find the information required to solve your particular problem.

## Troubleshooting the Installation

This section describes problems you might encounter when trying to install the DEM software.

### **Problem 1: You receive the message: “Catastrophic Error” or “Error Extracting Support Files”**

Perform the following steps:

1. Open Windows Explorer and delete the folder **Program Files\Common Files\InstallShield**.

If you are unable to delete this folder:

- a. Press CTRL+ALT+DELETE to access Task Manager.
  - b. From Task Manager, stop the lkernel process.
  - c. Repeat Step 1.
2. Using Windows Explorer, delete the folder **Program Files\InstallShield\Installation Information**.
  3. Install the DEM software.

### **Problem 2: You receive the message: “The InstallShield engine (iKernel.exe) could not be installed.”**

Perform the following steps:

1. Press CTRL+ALT+DELETE to access Task Manager.
2. From Task Manager, stop the lkernel process.

---

# Troubleshooting DEM Administrator Startup

This section describes problems you might encounter when trying to start DEM Administrator.

## Problem 1: DEM Administrator will not start

This problem will occur if one of the following conditions exists:

- The Naming Service and the Implementation Repository NT services have not started.
- The mdb file that is used for validating database access is not in the correct location, or it is locked by a previous instance of the TAO\_GWMGR process.

Perform the following steps:

1. Make sure the Naming Service and the Implementation Repository NT services have started by examining the Control Panel/Services applet. From Task Manager, verify that the Naming\_Service and ImplRepo\_Service executables are running.
2. Make sure the mdb file is in the \DEM\bin directory.
3. If the GWAdmin client will not start properly (that is, “loops” on Login dialog box or exits after the login information is entered), use Task Manager to determine whether the TAO\_GWMGR process is running. If the TAO\_GWMGR process is running, shut it down from the command line (for example, c:\DEM\bin\kill <process ID seen in Task Manager>). After the process is shut down, restart it from the command line by entering the following command and pressing the ENTER key:

```
c:\DEM\bin\tao_imr  
ImplRepoService=iioploc://hostname:ImplRepoService activate  
GWMGR
```

where **hostname** is the machine name of the PC running DEM.

After entering this information, try to start DEM Administrator.

## Problem 2: DEM Administrator attempts to create the DSN

The system DSN is missing.

Manually install a system DSN named GWADMIN from the ODBC32 icon in the Windows Control Panel. This DSN should point at the mdb file in the \DEM\bin directory.

## Problem 3: After the system reboots, the gwcfg window appears and “hangs”

This problem will occur if you uninstalled DEM and then reinstalled it in a different location.

Perform the following steps:

1. Close the gwcfg window.
2. From the Start menu, select **Programs>Command Prompt**.
3. From the \\DEM\bin folder, type *kill TAO\_GWMGR* and press the ENTER key.
4. Close the Command Prompt window.
5. From the Start menu, select **Settings>Control Panel**.

The Control Panel window appears.

6. Double-click on the **ODBC Data Sources** icon.  
The ODBC Data Source Administrator dialog box appears.
7. Click the **System DSN** tab.  
The **System DSN** tab appears.
8. Select **GWADMIN.mdb**, and click the **Configure** button.  
The ODBC Microsoft Access Setup dialog box appears.
9. Click the **Select** button.  
The Select Database dialog box appears.
10. Select **GWADMIN.mdb** in the bin directory where DEM was installed.

11. Click the **OK** button.
12. Click the **OK** button.
13. Click the **OK** button.

If the gwcfg window appears again, contact Avaya technical support.

## Problem 4: When you try to start DEM Administrator, the application “hangs”

This problem will occur if you uninstalled DEM and then reinstalled it in a different location.

Perform the following steps:

1. From the Start menu, select **Programs>Command Prompt**.  
The Command Prompt window appears.
2. At the command prompt, type **kill TAO\_GWMGR** and press the ENTER key.
3. Close the Command Prompt window.
4. From the Start menu, select **Settings>Control Panel**.  
The Control Panel window appears.
5. Double-click on the **ODBC Data Sources** icon.  
The ODBC Data Source Administrator dialog box appears.
6. Click the **System DSN** tab.  
The **System DSN** tab appears.
7. Select **GWADMIN.mdb**, and click the **Configure** button.  
The ODBC Microsoft Access Setup dialog box appears.
8. Click the **Select** button.  
The Select Database dialog box appears.
9. Select **GWADMIN.mdb** in the bin directory where DEM was installed.
10. Click the **OK** button.
11. Click the **OK** button.
12. Click the **OK** button.

## Problem 5: The system is unable to reattach to the running DSMs, SE, and DEM Administrator

Manually re-attach (activate) the relevant DSMs and the SE. After reactivating the DSMs and SE, refresh them.

## Problem 6: A console alert appears, indicating that the connection to the monitor failed

The monitor process may have stopped, preventing message logging.

Perform the following steps:

1. Open Windows Task Manager and verify that the monitor is running as a process.
2. If it is running as a process, shut it down. If you are unable to shut the monitor process down from the Task Manager, use the “kill” program that is available in the Windows NT Resource Kit.
3. From the Start menu, select **Programs>Command Prompt**.

The Command Prompt window appears.

4. At the command prompt, type ***tao\_imr list MONITOR\_POA*** and press the ENTER key.

This command lists the CORBA servers that are currently running.

5. If the monitor is listed, type ***kill MONITOR\_POA*** and press the ENTER key.
6. Close the Command Prompt window.
7. Restart DEM Administrator.

---

## Problem 7: You receive a message that the security host is not found

The gwadmin.ini file is not found or the host entry is missing.

Perform the following steps:

1. Open the gwadmin.ini file in \DEM\bin.
2. Verify that the “host” entry in the “Initial” section is set to the host name on which DEM Administrator is running.

## Problem 8: DEM Administrator does not respond

Perform the following steps:

1. Verify the service connection parameters from the Connection menu.
2. Restart DEM Administrator.
3. If DEM Administrator will not start, type ***tao\_imr list TAO\_GWMGR*** from the command line, and press the ENTER key.  
  
This command lists the services that are running.
4. If GWMgr appears in the service list, type ***kill TAO\_GWMGR*** at the command line and press the ENTER key.

## Problem 9: You receive a message that DEM Administrator cannot connect to a service

Perform the following steps:

1. Verify the service connection parameters from the Connection menu.
2. Restart DEM Administrator.
3. If DEM Administrator will not start, go to [“Problem 1: DEM Administrator will not start” on page 53](#).

# Troubleshooting DEM Administrator Login

This section describes problems you might encounter when trying to log into DEM Administrator.

## Problem 1: Login Unsuccessful

When you try to log into DEM Administrator, you receive an error message stating that the login value(s) are incorrect or access is denied.

Make sure you enter the default login and password correctly. The login is case-sensitive. The default login ID is **Administrator**. The default password is **password**.

If you are still unable to log into DEM Administrator, the mdb file may be corrupted or missing. Perform the following steps:

1. Verify that the file GWADMIN.MDB is present. If this file is missing, restore it from a backup.
2. Use ODBC32 manager in Windows Control Panel to repair the GWADMIN.MDB database file.

## Problem 2: DEM Administrator window does not appear after you log in

You enter your login and password and click the **Login** button in the Avaya Directory Enabled Management Administrator Login dialog box, but the Avaya Directory Enabled Management Administrator window does not appear. No error messages appear.

Perform the following steps:

1. Using the Services applet in Windows Control Panel, confirm that the TAO Implementation Repository and TAO Naming Service have started.
2. Perform one of the following steps:
  - If the services have started, use Task Manager to check whether the TAO\_GWMgr CORBA service has started.
  - If the services have not started, verify that the services exist and start them.
  - If errors are displayed, contact Avaya technical support.

## **Problem 3: When you log in, you are prompted to enter a new password**

Perform the following steps:

- 1.** Verify the service connection parameters from the Connection menu.
- 2.** Restart DEM Administrator.

# Troubleshooting the Synchronization Engine

This section describes problems you might encounter with the Synchronization Engine.

## Problem 1: Secondary level synchronization errors occur

The configuration data did not contain a “Maps” section.

Examine the Synchronization Engine’s active configuration. There should be a section titled “Maps,” which lists the maps that are active for the Synchronization Engine. (It can be specified in an “included” configuration.)

## Problem 2: Controlled types are not found

The supplied configuration data did not contain a “Controlled Types” section.

Examine the Synchronization Engine’s active configuration. There should be a section titled “Controlled Types,” which lists the maps that are active for the Synchronization Engine. (It can be specified in an “included” configuration.)

## Problem 3: The Lexer.cfg file is not found

The Synchronization Engine will not run without the lexer.cfg file. This file must be in the directory specified by the ROUTERHOME/home section/key pair in the current configuration. (It can be specified in an “included” configuration.)

---

# Troubleshooting DataStore Managers

This section describes problems you might encounter with the DataStore Managers.

## Problem 1: A DataStore Manager fails to activate, and the “<DSM Name> failed to launch properly” message appears

Perform the following steps:

1. In the **DataStore Managers** tab, verify that the host is correct for the DataStore Manager.
2. Perform one of the following steps:
  - If the host is incorrect, perform the following steps:
    - 1 Delete the DataStore Manager.
    - 2 Define a new DataStore Manager with the correct host.
    - 3 Activate the new DataStore Manager.
  - If the host is correct, try to activate the DataStore Manager.

If the DataStore Manager does not activate, perform the following steps:

- 1 From the Start menu, select **Programs>Command Prompt**.  
The Command Prompt window appears.
- 2 At the command prompt, type  
**TAO\_IMR**  
**ImplRepoService=iioploc://hostname:10014/**  
**ImplRepoService activate GWMRG**  
where **hostname** is the machine name of the PC running DEM.
- 3 Press the ENTER key.
- 4 Close the Command Prompt window.
- 5 Activate the DataStore Manager.

If these steps do not solve the problem, contact Avaya technical support.

## Problem 2: A DataStore Manager fails to activate, and no message appears

Check that the “server” name for the DataStore Manager matches the CORBA registration name for the server. (This should always be the case for DataStore Managers configured during installation.) To check this information:

1. From the Start menu, select **Programs>Command Prompt**.

The Command Prompt window appears.

2. At the command prompt, type ***TAO\_IMR ImplRepoService=iioploc://hostname:10014/implRepoService list***

where ***hostname*** is the machine name of the PC running DEM.

3. Press the ENTER key.

A list of CORBA service names should appear.

4. Check that the failing DataStore Manager’s “server” name value appears in the list.
5. If the failing DataStore Manager’s “server” name value does not appear in the list, delete and redefine that DataStore Manager.

If these steps do not solve the problem, contact Avaya technical support.

---

## Problem 3: A DataStore Manager activates, but it fails to attach or run

Perform the following steps:

1. Make sure you can ping the IP of the DEFINITY system to which you are trying to connect. If you can ping the IP of the DEFINITY system, make sure you can telnet to the DEFINITY system using the IP and the port (for example, **telnet 135.9.193.930 9000**, where **9000** is the port).
2. Make sure that the “host” value for the DSM specifies the correct machine-name.
3. Check the configuration values for the specified DSM. In particular, make sure that the connection parameters are correct.
4. For DEFINITY DataStore Managers, check that the configuration contains the following lines:

```
[_includes_]
Include0=_DefinityRoot
```

5. For the PrimaryLDAP DataStore Manager, check that the configuration contains the following lines:

```
[_includes_]
Include0=_GWDSM
```

6. For the Intuity DataStore Managers, check that the configuration contains the following lines:

```
[_includes_]
Include0=_IntuityRoot
```

If these steps do not solve the problem, contact Avaya technical support.

## Problem 4: The Protocol Adapter module failed to load

When this message appears, the DataStore Manager is unusable. The following conditions can cause this error:

- The DataStore Manager configuration specified an incorrect driver file in the Protocol section.
- The DataStore Manager configuration is missing a driver key in the Protocol section.
- The driver file specified in the DataStore Manager configuration is correct, but that file is missing.

Perform the following steps:

1. Verify that the configuration specified is the correct configuration for this DataStore Manager.
2. Verify that the name of the Protocol Adapter is correct.
3. Verify that the driver key is specified in the [\_Protocol\_] section of the DataStore Manager. (It can be specified in the an “included” configuration.)
4. Verify that the specified driver is a dynamic link library (DLL) file and is located in \DEM\bin.

# Troubleshooting GWAgent

This section describes problems you might encounter with GWAgent.

## Problem 1: You cannot start GW Agent

The registry settings for GW Agent are incorrect.

Use the registry editor to examine and correct the GW Agent entries. Make sure the path to the ltap.config file is correct.

## Problem 2: You cannot connect to LDAP

The entries in the ltap.config file are incorrect.

Open the ltap.config file and verify that the entries for the host and port of the true LDAP server are correct.

## Problem 3: The triggers are unavailable and/or unpopulated

This problem can be caused by the following conditions:

- The trigger database is empty.
- The path to the trigger database does not exist.

Recreate the triggers.

## Problem 4: All of the triggers fail

The triggers are incorrect and must be repopulated.

Recreate the triggers.

## Troubleshooting the Scheduler

This section describes problems you might encounter when scheduling tasks with DEM Administrator.

### Problem 1: Scheduled events will not run

The mdb file is corrupted or missing.

Perform the following steps:

1. Verify that the file GWADMIN.MDB is present. If this file is missing, restore it from a backup.
2. Use ODBC32 manager in Windows Control Panel to repair the GWADMIN.MDB database file.

# Glossary and Abbreviations

---

## C

### CD ROM

**Compact-disk read-only memory**, An optical computer disk widely used for distributing and installing software and electronic documentation.

### client

An application that runs on one processor while drawing on data or other resources that are on a server located elsewhere. A DEM client is a workstation capable of modifying DEM data.

### configuration file

A file that describes how a DataStore Manager (DSM) or Synchronization Engine (SE) operates at run time.

## D

### DataStore Manager (DSM)

A software process that interfaces with a device type (such as a DEFINITY system, an Intuity system, a PC running DEFINITY Network Administration, or an LDAP server) that connects to the DEM. DataStore Managers enable different DEM devices to communicate with each other.

### Directory Enabled Management (DEM)

A software application that "LDAP-enables" DEFINITY system data and Intuity system data, providing real-time integrated directory-based read/write access to DEFINITY data, Intuity data, and data derived from enterprise sources (such as corporate directories).

### distributed application

A computer application that runs on one or more clients and uses shared resources, such as databases. These resources reside on a common server. Distributed design lets multiple users run programs using common, centrally maintained files.

### domain

An addressable location on a network, such as a group of computers, single computer, or subdirectory. See Domain Name Server (DNS).

### Domain Name Server (DNS)

An Internet computer that maintains a database of domain names.

### DNS

See Domain Name Server (DNS).

### DSM

See DataStore Manager (DSM).

## E

### Ethernet

A local area network (LAN) that works over short distances on twisted-pairs or coaxial cables at speeds up to 10 mbps or 100 mbps.

---

## H

### host

A server.

### host name

The name of the PC on which the DEM software is installed.

## I

### IP (Internet Protocol) address

A 32-bit number that uniquely identifies endpoints on the Internet, commonly specified in the form  $n_1.n_2.n_3.n_4$  where each  $n_n$  is a decimal number between **0** and **255**. Part of the IP address represents the address of a local network's gateway to the Internet and part represents the host-machine address within that local network. The available bits are apportioned to the network address or local address using a system of classes. The Class A addresses used by the largest organizations on the Internet reserve the first 8 bits for the network portion of the address and remaining 24 for the host machine. Class B addresses, the most common class, assign 16 bits to the network and 16 to the host machine. The Class C addresses used by small networks reserve the first 24 bits for the network and the remaining 8 bits for the host.

## L

### LAN

See local area network (LAN).

### LDAP

See lightweight directory access protocol.

### Lightweight Directory Access Protocol (LDAP)

An open Internet standard used to manage DEM data.

### local area network (LAN)

A short-range data communication network linking computers and peripherals, such as printers. Ethernet and Token-Ring are common LAN architectures.

## N

### Network Interface Card (NIC)

A circuit board that can be fitted to a personal computer (PC) to allow the PC to communicate with other machines on a network.

### NIC

See Network Interface Card (NIC).

## P

### PBX

Private Branch Exchange: a customer-owned telephone switch that connects a company's internal telephone network with the local telephone service provider's central office. The DEFINITY system is a PBX.

---

## S

### SE

See Synchronization Engine (SE).

### server

Any system that maintains and administers files that are used by independent client applications.

### Synchronization Engine (SE)

A software process that synchronizes changes between native device data (for example, data from a voice server) and data from enterprise directories based on the routing and mapping rules you define.

## T

### TCP/IP

**Transmission Control Protocol/Internet Protocol:** a standard that lets different computer hardware and different operating systems (such as PCs, Apple computers, UNIX workstations, and mainframes) communicate with each other over a network. TCP/IP is the most complete, most widely accepted network protocol currently available.

## W

### WAN

See wide area network.

### wide area network

A data network that connects local area networks (LANs) using common-carrier telephone lines, bridges, and routers.



# Index

---

## A

Active Directory  
configuring [28](#)

## C

Configuring [23](#)

## D

DataStore Manager  
activating DEFINITY DataStore Manager  
[40, 44](#)  
activating DEM DataStore Manager [36](#)  
activating Intuity DataStore Manager [44](#)  
attaching DEFINITY DataStore Manager  
[40, 44](#)  
attaching DEM DataStore Manager [36](#)  
attaching Intuity DataStore Manager [44](#)  
configuring additional DEM DataStore  
Managers [37](#)  
troubleshooting [61](#)

DataStore Managers  
configuring additional DEFINITY DataS-  
tore Managers [41](#)  
configuring additional Intuity DataStore  
Managers [45](#)  
overview [3](#)

DEFINITY DataStore Manager  
activating [40, 44](#)  
attaching [40, 44](#)

DEM  
activating DEFINITY DataStore Manager  
[40, 44](#)  
activating DEM DataStore Manager [36](#)  
activating Intuity DataStore Manager [44](#)  
administration login [49](#)  
attaching DEFINITY DataStore Manager  
[40, 44](#)  
attaching DEM DataStore Manager [36](#)  
attaching Intuity DataStore Manager [44](#)  
configuring Active Directory [28](#)  
configuring additional DEFINITY DataS-  
tore Managers [41](#)

DEM, (continued)

configuring additional DEM DataStore  
Managers [37](#)  
configuring additional Intuity DataStore  
Managers [45](#)  
configuring DEM Browser [48](#)  
configuring GWAgent [32](#)  
configuring LDAP [28, 32](#)  
configuring Netscape LDAP [31](#)  
configuring Novell NDS LDAP [31](#)  
help [ix](#)  
installation checklist [10](#)  
installation planning form [12, 20](#)  
installation procedure [15](#)  
new features [6](#)  
overview [1](#)  
requirements [7](#)  
starting DEM Administrator [32](#)  
starting the Synchronization Engine [35](#)  
upgrade [9, 25](#)

DEM Administrator  
login [49](#)  
overview [4](#)  
starting [32](#)  
troubleshooting [51](#)

DEM Browser  
configuring [48](#)  
overview [5](#)

DEM DataStore Manager  
activating [36](#)  
attaching [36](#)

documentation conventions [ix](#)

## G

GWAgent  
configuring [32](#)  
troubleshooting [65](#)

## H

help [ix](#)

**I**

- installation
  - requirements [7](#)
- Installing [7](#)
- intended audience [vii](#)
- Introduction [1](#)
- Intuity DataStore Manager
  - activating [44](#)
  - attaching [44](#)

**L**

- LDAP
  - configuring [28, 32](#)
  - configuring for Netscape [31](#)
  - configuring Novell NDS [31](#)
- LDAP Data Store
  - overview [4](#)
- login
  - troubleshooting [53, 58](#)

**P**

- planning form [12, 20](#)
- Purpose of this manual [vii](#)

**R**

- related documentation [viii](#)
- requirements
  - software
    - requirements [7](#)

**S**

- scheduling
  - troubleshooting [66](#)
- software
  - installation checklist [10](#)
  - installation planning form [12, 20](#)
  - installation procedure [15](#)
  - upgrade [9, 25](#)
- software installation
  - troubleshooting [52](#)
- support [ix](#)
- Synchronization Engine
  - overview [4](#)
  - starting [35](#)
  - troubleshooting [60](#)

**T**

- technical support [ix](#)
- training [viii](#)
- Troubleshooting [51](#)
- troubleshooting [51](#)

**W**

- Who should use this manual [vii](#)